
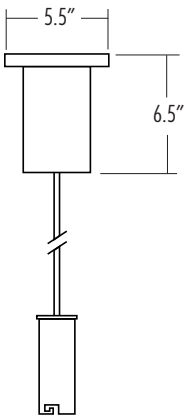
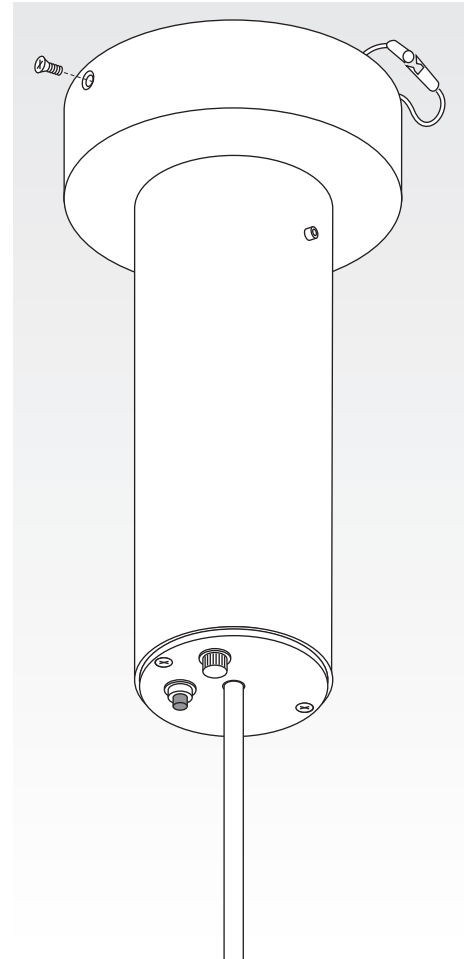
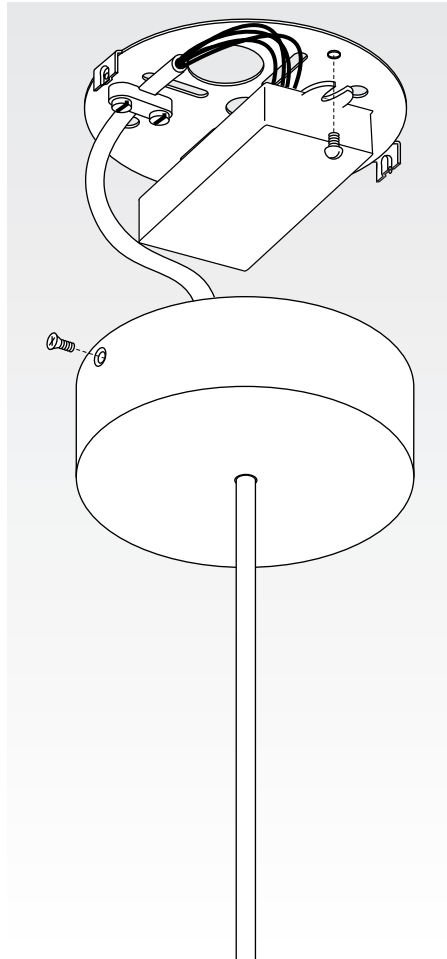


1 MOUNT

Mount back plate to octagonal box. Attach cover plate to back plate with flathead screws. Attach ballast compartment to cover plate with Allen head screws.


For Dimming Fixtures, this canopy must be used. Pendant length should not exceed four feet.

On fixtures with **Emergency Battery Backup**, Delray uses a combination of both canopy types. The top portion houses the ballast and the lower cylinder has been lengthened six inches to house the battery system.

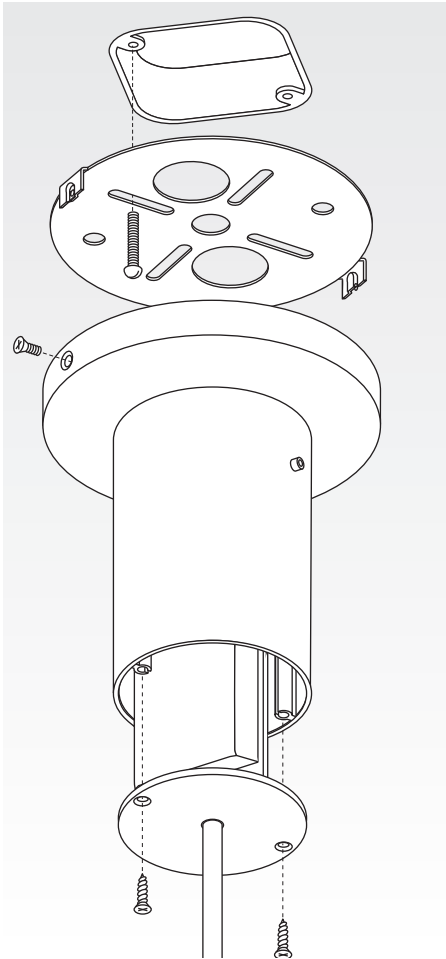


Available on these fixtures:

- 2072 2322
- 2142 2342
- 2272 2362
- 2292 2382

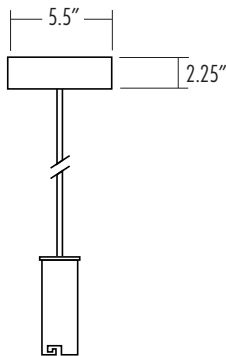

Available on these fixtures:


- 2077 2327
- 2147 2347
- 2277 2367
- 2297 2387

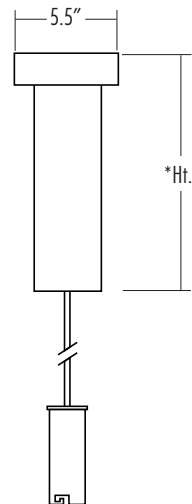

- *15.25" for 650 lumen **EM**
- *18.75" for 1300 lumen **EM13**

2 ADJUST PENDANT LENGTH

Remove upper nuts under pendant cover and slide socket assembly down out of holder. Loosen the screws on the strain relief and adjust pendant to the desired length.

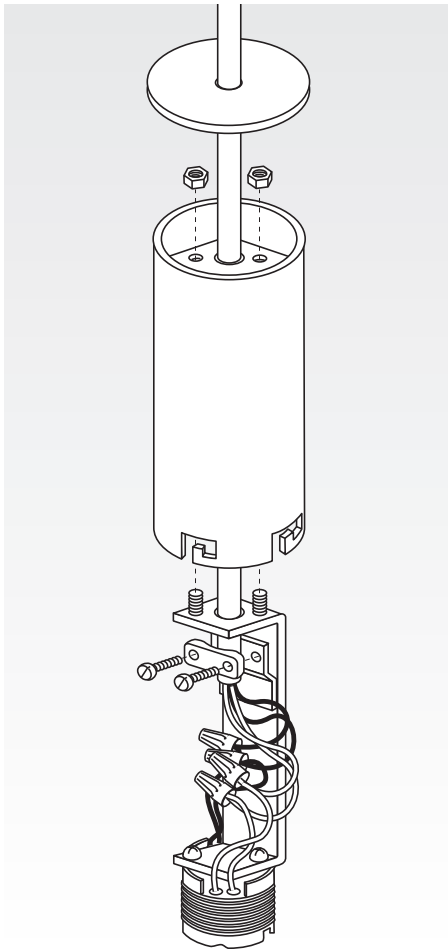


WARNING Risk of fire or electric shock. Only qualified, licensed electricians should install Delray Lighting products.

1. Read and review all instructions and diagrams prior to installation.
2. Disconnect power prior to installation. Turn off circuit breaker or remove fuse from fuse panel. (Turning off the light switch is insufficient to safeguard against electric shock.)
3. Electrical connections must conform to local codes and ordinances, or the National Electrical Code.
4. Wire the luminaire following the wiring diagram on the ballast, or inside the box. Use UL listed wire connectors suitable for the size, type, and number of conductors. No loose strands or wires should be present. Secure wire connectors with UL listed electrical tape and wire nuts.
5. Install lamps (not included). Do not exceed recommended wattage.
6. Restore electricity and test fixture.

3 ATTACH SHADE


For fixtures with shades, slide the shade over the bolts, with the spacers beneath the shade, and secure with cap nuts.

Install with shade curved downward (as shown at right).

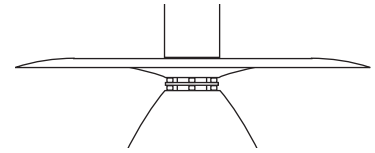


4 ATTACH LUMINAIRE

Attach socket holder by inserting the four reflector/glass assembly prongs into the slots on the socket holder and twist dropping into place.

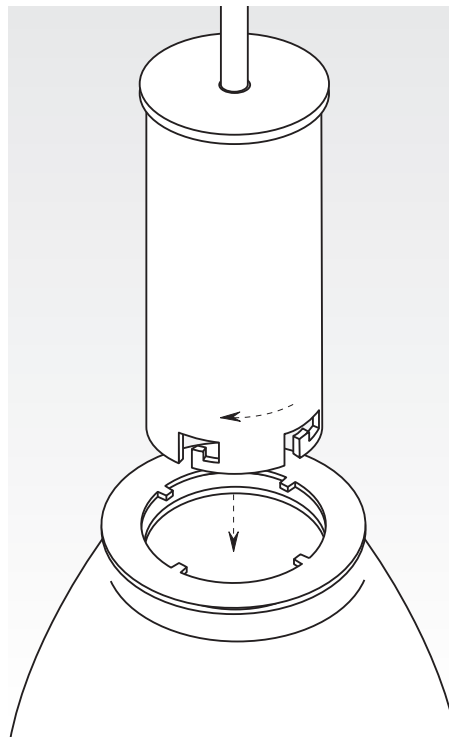

TWIST LOCK SOCKET

Push lamp in and twist clockwise to lock into place.

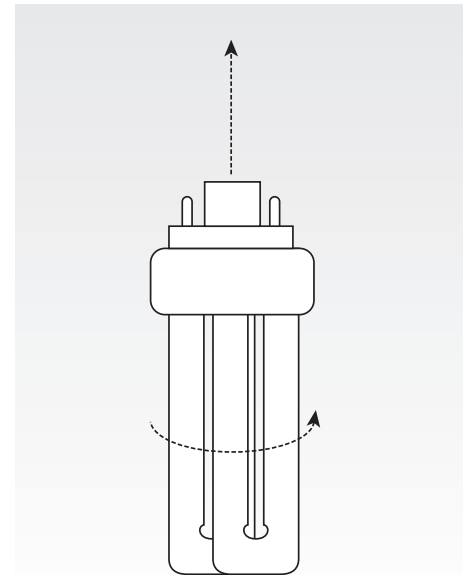

NOTE: These safeguards and instructions are not intended to cover all possible conditions and circumstances. Proceed with caution; utilizing established professional electrical installation methods, tools, and supplies.