


# CYLINDRO II

## Mounting Instructions Installation ou de montage

**WARNING:** disconnect main power at the source prior to installation! Only qualified electricians should install Delray Lighting products.

### Standard Surface Mount Canopy

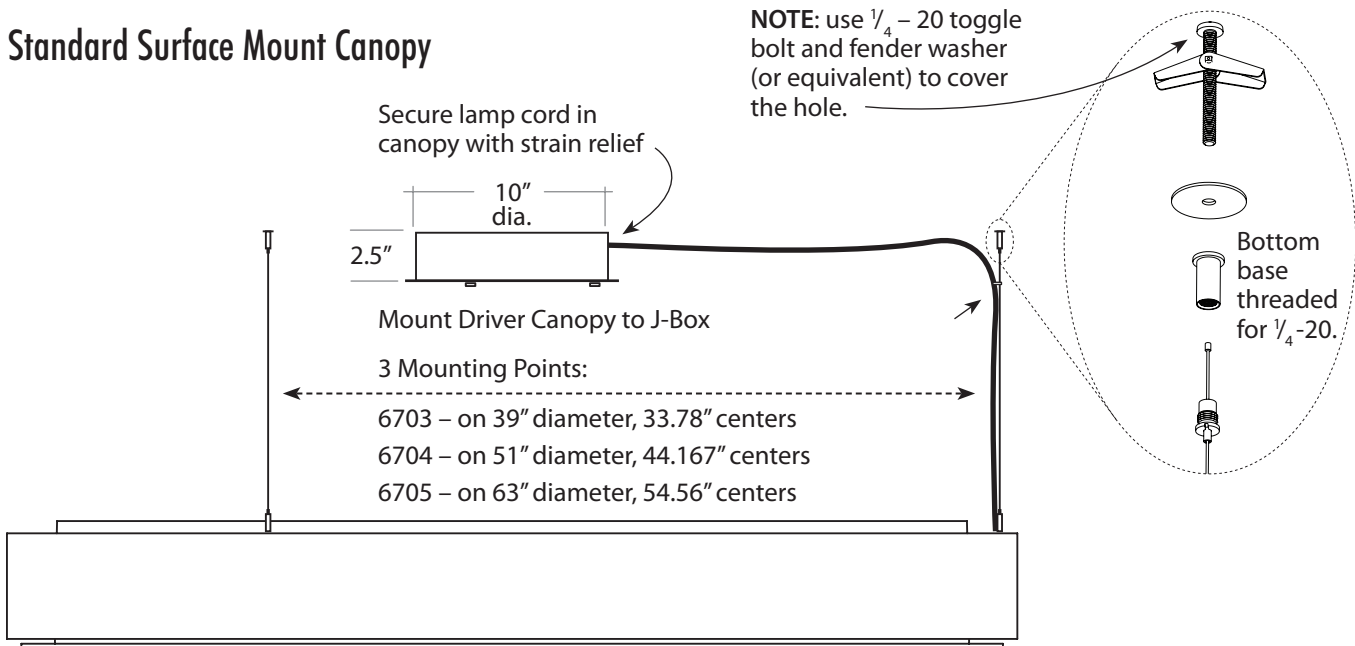


### SLRD Option Remote Driver

Remote driver housing must remain accessible. Use bar hangers to mount in ceiling.

\*Max. Wiring Distance (at full load)

Wire Size (AWG)	Distance (ft.)
18	18
16	29
14	46
12	71
10	120

**NOTE:** multiple drivers must be mounted no less than 4 inches apart side-by-side, and 1 inch apart end-to-end, to avoid overheating.

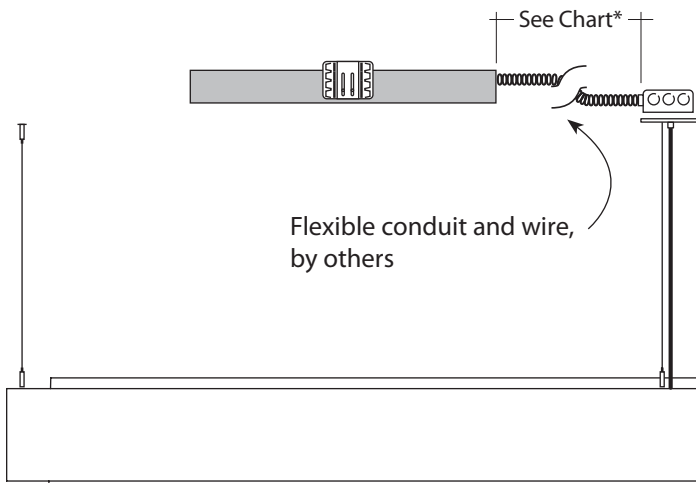

Attach backplate to 3 in. mud ring (by others).

Attach canopy to backplate with AC cable gripper base.

Insert 1/16" aircraft cable into gripper, depress nozzle tip to adjust. Re-insert gripper into base. Leave at least 1" of exposed cable.

Make connections in J-box to remote driver.

**NOTE:** Connection of lamp cord directly to line voltage voids warranty.

Feed lamp cord through threaded nipple and backplate. Use O-rings provided to tether lamp cord along aircraft cable.