


KONE3 LED

Semi-Recessed Install *Installation ou de montage*

WARNING: disconnect main power at the source prior to installation!
*Only qualified electricians should install DeRay Lighting products.
See additional safeguards on next page.*

For Models:

KLS312/3, KLS322/3,
KLS332/3 & KLS342/3

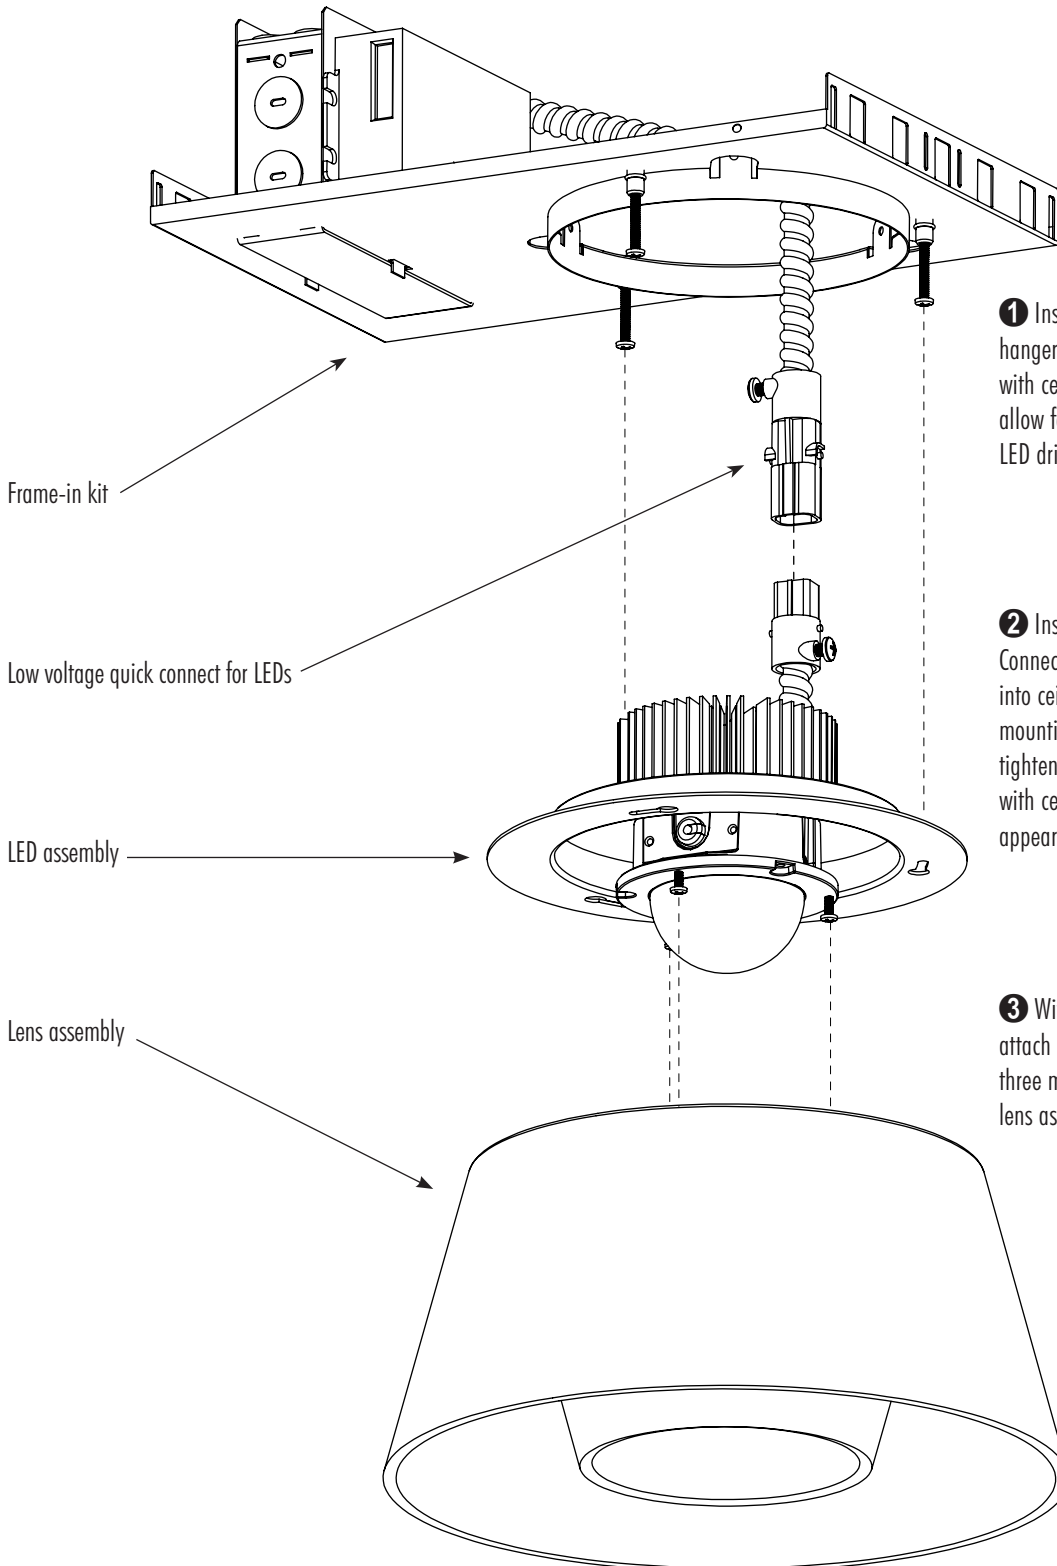

1 Install frame-in kit with supplied bar hanger brackets. Bottom of frame should be flush with ceiling. Cut 6.5" hole in finished ceiling to allow for mounting posts to pass through. Wire up LED driver to main power according to the NEC.

2 Install LED assembly from below finished ceiling. Connect LED quick connect to assembly and push into ceiling. Attach flange with keyhole slots to mounting posts on the frame-in kit. Secure by tightening screws, flange should become flush with ceiling. Overtightening may cause flange to appear warped.

3 With LED assembly secured in place, attach glass lens assembly to LED flange with the three mounting screws to the key hole slots on the lens assembly. Tighten screws to secure.

DELRAY
LIGHTING
INCORPORATED

A-Line LED

SEPT 2016

WARNING: disconnect main power at the source prior to installation!

Only qualified electricians should install Delray Lighting products.

- Read instructions and review diagrams prior to installation.
- Before beginning installation, turn off circuit breaker or remove fuse at fuse box to disconnect power. Turning off a light switch is insufficient to prevent electrical shock.
- All electrical connections must be in compliance with local codes, ordinances and the National Electrical Code. If you are unfamiliar with these methods of electrical wiring installation, secure the services of a qualified, licensed electrician.

NOTE: These instructions cannot address all possible conditions and circumstance that may occur during installation. While Delray products conform to the highest quality and safety standards, safe installation also requires caution, common sense, and careful implementation of professional electrical installation methods.

Carefully follow driver wiring diagrams and instructions included with the fixture. Use only cUL Listed wire connectors suitable for the size, type, and number of conductors. No loose wires or wire strands should be remain.

Secure wire connectors with only cUL Listed electrical tape and wire nuts.