





UNO/DOS LINEAR

Standard Mount Installation ou de montage

WARNING: Disconnect main power at the source prior to installation! Fixture must be installed by a qualified electrician.

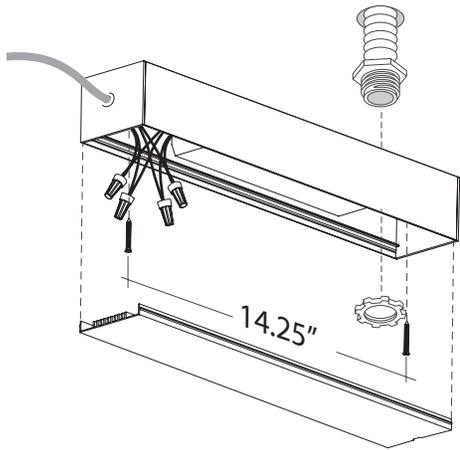

Mount drive housing to surface with screws.
Use clear O-rings to tether cord along cable
for support and more tidy appearance.

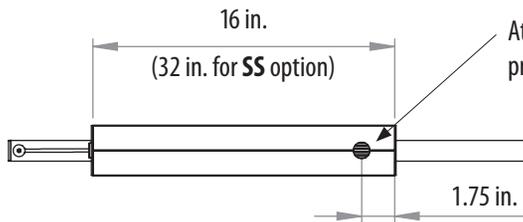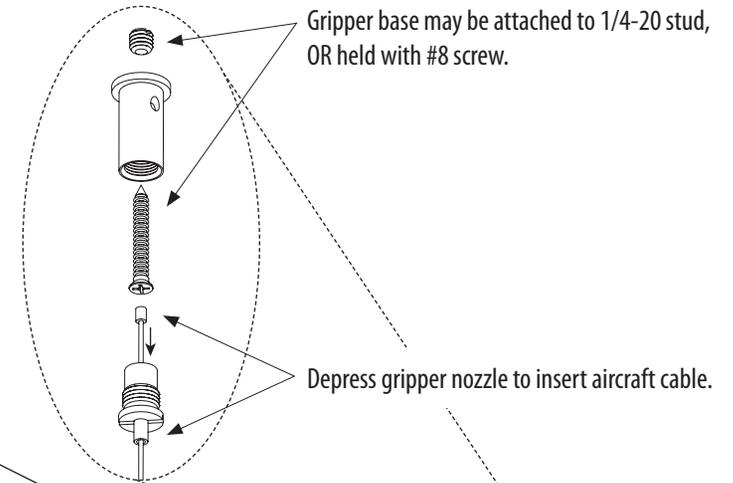

Attach conduit to top of driver housing for
primary power.

