




CYLINDERS

COMPACT FLUORESCENT

SURFACE MOUNT
CS8100

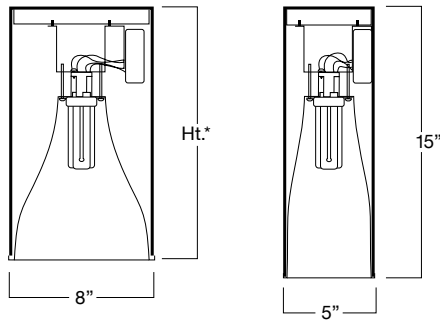

CS8100/CS5100
1-18, 26, 32 & 42W

OPTIONS


EM—Emergency Pack (CS8100 only)

D—Dimming

Adds 4" to length. Fixtures to be installed in the same location will be lengthened to match the dimming and EM fixtures.
See back page for details.

*Ht. = 14" standard, 18" EM/dimming

PENDANT MOUNT
CP8100

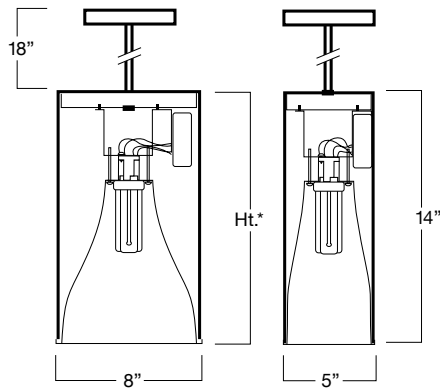

CP8100/CP5100
1-18, 26, 32 & 42W

OPTIONS

EM—Emergency Pack (CP8100 only)

D—Dimming

Adds 4" to length. Fixtures to be installed in the same location will be lengthened to match the dimming and EM fixtures.
See back page for details.


CPBA—Ball Aligner

CPAC—Aircraft Cable suspension, 18" incl. standard

*Ht. = 14" standard, 18" EM/dimming



WALL MOUNT
CW8100

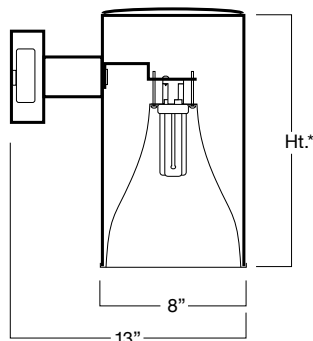

CW8100
1-18, 26, 32 & 42W

OPTIONS


WL—Wet Location lens

EM—Emergency Pack

D—Dimming

Adds 4" to length. Fixtures to be installed in the same location will be lengthened to match the dimming and EM fixtures.
See back page for details.


*Ht. = 14" standard, 18" EM/dimming

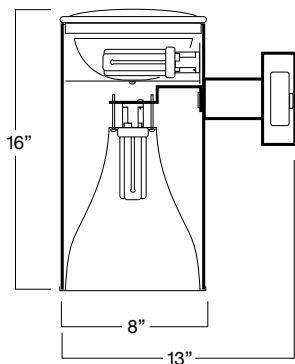

CUH8200
2-18, 26, 32 & 42W

OPTIONS

WL—wet location lens

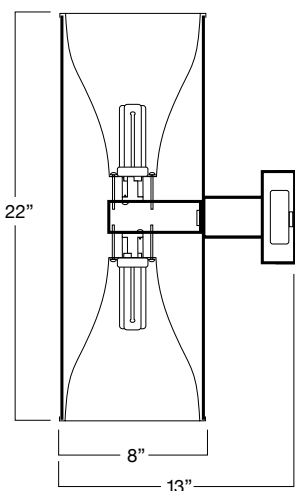

CUV8200
2-18, 26, 32 & 42W

OPTIONS

WL—wet location lens

ORDER INFORMATION SAMPLE

<i>CP8/CP5</i>	<i>118</i>	<i>A30</i>	<i>S</i>	<i>1E</i>	<i>D1.CPAC</i>
Model	Lamp	Reflector	Finish	Voltage	Option
	1-2 18, 26, 32 or 42W	A30 —Clear Alzak® Haze G30 —Wheat Alzak® Haze B —Black Baffle SP —Splay Fresnel Lens*	W —White S —Silver BM —Brushed Metal BZ —Bronze K —Black CC —Custom Color (RAL color must be specified)	1E —120V 2E —277V	WL —Wet Location lens* CPBA —Ball Aligner CPAC —Aircraft Cable suspension EM —Emergency Pack* D —Dimming (see back page)

*Not for CS5100 or CP5100

UP/DOWN
Horizontal/Vertical
CUH8200/WL



UP/DOWN
Vertical/Vertical
CUV8200



WL—Wet Location Lens (enlarged view)





CW8100
 Van Tilburg, Banvard & Soderbergh, AIA
 Santa Monica, California

TRIMS



A—Clear Alzak® Haze
 anti-iridescent finish



G—Wheat Alzak® Haze
 anti-iridescent finish




SP—Splay fresnel lens




B—Black baffle


FINISHES




W
 White




S
 Silver



BM
 Brushed Metal



BZ
 Bronze



K
 Black



CC
 Custom Color

Custom colors also available (**CC**). Specify RAL color.

DIMMING

CS8100, CP8100, CW8100, CP5100 only

D3—Advance Mark X for one or two 26, 32 or 42W lamps (adds 4" to length).

D5—Advance Mark VII for 26, 32 or 42W lamp.

D8—Lutron Hi-Lume for 26 or 32W lamp. Voltage must be specified.

D9—Lutron EcoSystem for 18, 26, 32 or 42W lamp.

EMERGENCY

EM—Emergency power pack ignites one lamp for 90 minutes. (Adds 4" to length of all fixtures.)



VOLTAGE

Standard in universal voltage, 120V through 277V. Voltage must be specified for dimming and emergency ballasts. c.U.L. listed for use in damp locations.

