


# UNO CIRCULAR INDIRECT LED WITH OPAL ACRYLIC LENS

**DELRAY**  
LIGHTING  
INCORPORATED

**UNO CIRCULAR LED. INDIRECT**

BURBANK,  
CALIFORNIA,  
91505  
WWW.  
DELRAY  
LIGHTING.  
COM



Cross Section

### CONSTRUCTION

- Extruded aluminum outer housing with indirect white frosted acrylic diffuser. 8 ft. gray or white 18 AWG adjustable power cord and AC cables with push button grippers supplied, standard. Specify **XP** for additional length (25 ft. max.).

### WHITE LEDs

- Nichia Corp. NFSL757 tight bin chips on aluminum clad boards. 90 CRI.
- W30** (3000K), **W35** (3500K), and **W40** (4000K) white color temperatures.
- Drivers are programmable constant current, 0–10V, 1% dimming, standard.

### CUSTOM LUMEN OUTPUT REDUCTION

- Factory set custom reduced-lumen output driver configuration. Order **XL**. Specify lumens.

### COLOR LEDs

- Red, Blue or **SQ**–RGB flexible 5050 tapelights.
- Constant voltage drivers are 12V for single color, 24V for RGB sequencer.
- RGB sequencer requires **BDMXMOD** DMX 512 interface.
- Optional DMX wall box control offered separately (see Traxon, page 2.)

### STANDARD CANOPY

- Mounts to all standard JBoxes.
- Drivers and DMX module installed in surface mount canopy. For remote driver installation, see page 2.
- cUL listed for dry locations only.
- Specify:
  - S, CS**–standard canopy (10" x 2.25")
  - SR, CR, NCR**–remote canopy (3" x 0.45")

**TYPE:**

**PROJECT:**

**ORDER NUMBER:**


Model#	Finish	LEDs	Mount	Option
<b>UiC2</b> –2 ft.	<b>S</b> –Silver	<b>W30</b>	<b>S</b> –Separate	<b>BDIM-W9</b>
<b>UiC3</b> –3 ft.	<b>W</b> –White	<b>W35</b>	<b>SR</b> –Separate Remote	<b>BDIM-W11</b>
<b>UiC4</b> –4 ft.	<b>K</b> –Black	<b>W40</b>	<b>CS</b> –Central Standard	<b>BDMXMOD</b>
<b>UiC5</b> –5 ft.		Red	<b>CR</b> –Central Remote	
		Blue	<b>NCR</b> –Nexus CR	
		<b>SQ</b> –RGB	<b>SREM</b> –Separate EM	
			<b>CREM</b> –Central EM	

**Example:**


UC5	S	W40	SR	BDIM-W9
-----	---	-----	----	---------

- BTRAXW**–Traxon Light Drive\* (enter quantity): \_\_\_\_\_
- XP**–Extra power cord (in inches; max. 25 ft.): \_\_\_\_\_
- XL**–custom lumen reduction (specify lumens): \_\_\_\_\_


- UiC2** – 2 ft., 2200 lumens, 23W
- UiC3** – 3 ft., 3300 lumens, 35W
- UiC4** – 4 ft., 4300 lumens, 47W
- UiC5** – 5 ft., 5400 lumens, 58W




**S** – Separate




**SR** – Separate Remote




**CS** – Central Standard



**CR** – Central Remote




**NCR** – Nexus Central Remote

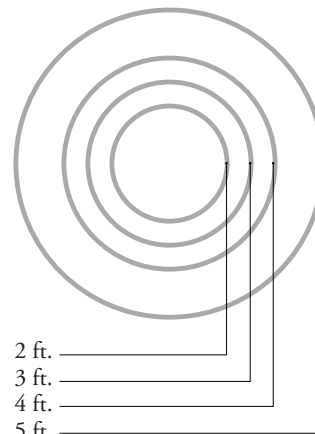


- 2 ft.
- 3 ft.
- 4 ft.
- 5 ft.

## 5 FT. LED

### UC5.W35



### CP DISTRIBUTION

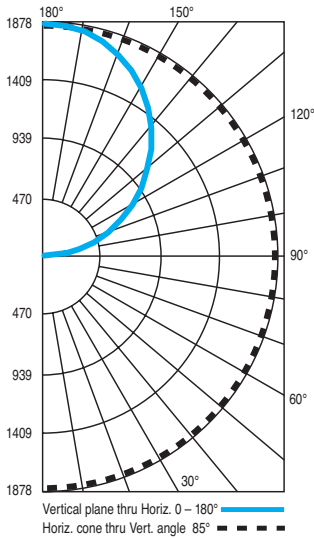

### COEFFICIENTS

% CEILING 80	(20% FLOOR)		
	% WALL 70	50	30
0	119	119	119
1	108	103	98
2	98	89	82
3	89	78	70
4	82	69	60
5	75	62	53
6	69	56	47
7	64	50	42
8	60	46	37
9	56	42	34
10	52	39	31

### NOTES

#### UC5.W35

59W LEDs, 3500°K  
Delivered lumens: 5,400

CRI: 90

R9 ≥ 72

## REMOTE DRIVERS

Driver must be accessible after installation. For suspended and hard lid ceilings with access panels. Canopy mounts to mud ring attached to J-box.


Standard pendant length: 8 ft. Specify **XP** for extra pendant.  
Maximum canopy to fixture distance: 25 ft. Maximum canopy to driver distance: 100 ft. (with 10 AWG wire).

**NOTE:** Multiple drivers must be mounted no less than 4 inches apart side-by-side, and 1 inch apart end-to-end, to avoid overheating.




Remote Driver Canopy  
3.8 x 0.45 in.

**SR** – Separate mount driver installation.




**CR** – Central mount remote driver installation.

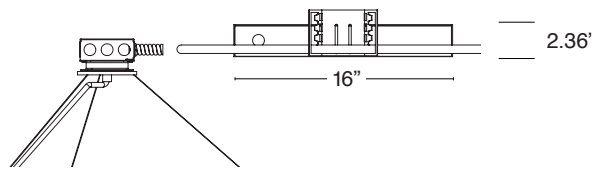

**SR** or **CR** – Separate or Central Emergency. *T-bar install shown, below.*

Emergency battery pack provides 7W for 90 minutes. (12W also available.)  
Remote install only. Red driver light and test switch mounted in handy box installed at ceiling.

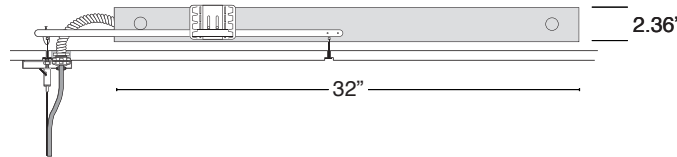

### WATTS / LUMENS

Diameter	Watts	Total Lumens	Delivered Lumens
2'	23	4,100	2,166
3'	35	6,100	3,250
4'	47	8,150	4,333
5'	59	10,200	5,416

### AIRCRAFT CABLE

**Note:** Aircraft cable suspension not recommended for outdoor use, where fixture will be exposed to water, or subject to wind oscillation. Avoid use near HVAC vents and in environments with corrosive chemical vapors, such as swimming pools.

### ACRYLIC DIFFUSER CLEANING

**Warning:** Do not clean with ammonia based cleaners (e.g. Windex®). Use only water or cleaners specifically formulated for cleaning plastics.

## OPTIONS

### DIMMING DRIVERS

120/277V, 50/60 Hz.

#### STANDARD DIMMING

Programmable, 0–10V, dims to 1%.

#### LUTRON DIMMING DRIVERS

##### BDIM-W9

- Lutron Hi-Lume L3DA Series, 3-wire
- Dims to 1%

##### BDIM-W11

- Lutron EcoSystem LDE14 Series
- Dims to 1%
- Fade to off.

### RGB OPTIONS

#### BDMXMOD

- Osram part no. OTDMXRGB supplied.
- DMX control interface for RGB LED.
- Provides DMX control with protocols that meet USITT DMX-512A or DMX512 (DIN 56930-2). No converter is required. DMX controls by others.
- A second 4-conductor control cable to fixture canopy is supplied.

#### TRAXON LIGHT-DRIVE RGB

(order separately)

##### BTRAXW – white faceplate

- Standalone, wall-mounted (12V power supply included) DMX controller for RGB LED that provides direct access to fixtures.
- Tune color and brightness with the Light-Drive wheel.
- Fully dimmable white mode button.
- See [www.traxon-usa.com](http://www.traxon-usa.com) for details.

### RED BRAIDED CORD

Red braided power cord.  
Order **RBRD**.

