



UNO HELIX & SPIRAL


UNO Helix & Spiral LED

UNO Helix and Spiral feature a minimalist 1-inch extruded aluminum housing profile, with a proprietary acrylic lens that provides broad, even illumination. Both are offered with white 90 CRI Nichia LED chips, available in 3000°, 3500°, and 4000° Kelvin color temperatures, or single-color red or blue LEDs, plus RGB with DMX512 interface. Dimming options available.

Ideal for lobbies, atriums, and stairwells with high ceilings. Visually dynamic when showcased behind exterior windows. uCL listed for dry locations.

UC3HELIX

3 ft. diameter
9,750 lumens / 1050 mA / 105 watts

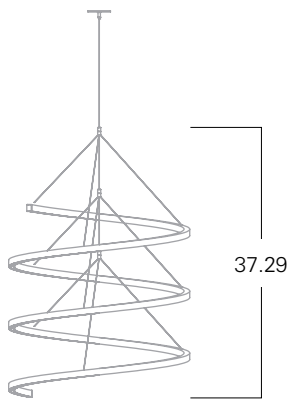


UC4HELIX

4 ft. diameter
13,000 lumens / 1425 mA / 140 watts



UC5HELIX

5 ft. diameter
16,250 lumens / 1775 mA / 175 watts

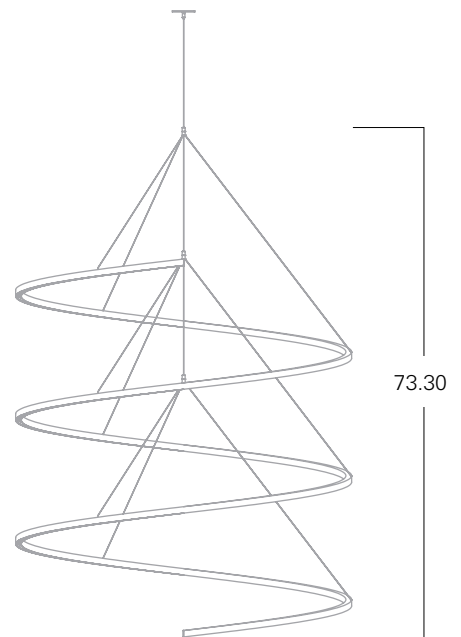

UCSPIRAL

8,365 lumens / 2550 mA / 84 watts
Surface mount only.

