

ASPECT REFLECTOR WITH OPAL GLASS LUMINAIRE

DELRAY
LIGHTING
INCORPORATED

2322



TYPE:

PROJECT:

ORDER NUMBER:

Model#	Paint Finish*	Wattage	Voltage	Ballast
	Hammertone	18, 26	1-120V	E-Electronic
	Silver		2-277V	D5, D8,
	White			D9-Dimming
	CC-Custom			only for items
	RAL color			marked ♦.
				(See back page
				for details.)

Example:

2322	W	26	1	E
------	---	----	---	---


*Paint finish on ballast housing and ceiling canopy only.
Reflector exterior is matte anodized aluminum.

ARMATURE

Suspends from cable or rod, constructed of extruded aluminum, and is securely fastened to cast wire way top. Ballast fits inside extruded cylinder attached to lamp holder for pull-down access. U.L. listed for damp locations.

2320

Fluorescent




SURFACE MOUNT

Steel canopy mounts to all recessed J-boxes. Ballast fits inside extruded cylinder **2321** or horizontally in flat canopy **2325**. Specify **EM** for emergency battery pack, available on **2321** only. The 650 lumen battery pack adds 9 3/4" to canopy height, 13 3/4" with the 1300 lumen unit. U.L. listed for damp locations.


2321

Fluorescent



2325♦

Fluorescent




PENDANT MOUNT

Canopies mount to standard J-box. Ballast fits inside extruded cylinder **2322** or horizontally in flat canopy **2327**. Pendant is 6" standard or can be specified in any length with 12" max for CFL (3' max. dimming). Specify **EM** for emergency battery pack, available on **2322** only. The 650 lumen battery pack adds 9 3/4" to canopy height, 13 3/4" with the 1300 lumen unit. U.L. listed for damp locations.


2322

Fluorescent

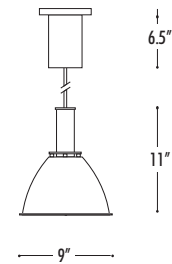

2327♦

Fluorescent




WALL MOUNT

4" square by 3/16" thick aluminum wall plate mounts to 3" mud ring on 2 3/4" vertical, centered holes. Fixture connects to extruded aluminum arm, which is securely fastened to cast wire way top. Ballast fits inside extruded cylinder **2323** or horizontally in flat canopy **2324**. U.L. listed for damp locations.


2323

Fluorescent

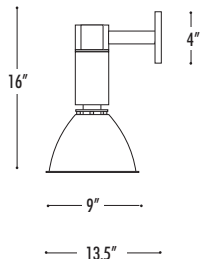

2324♦


Fluorescent




BURBANK,
CALIFORNIA,
91505
WWW.
DELRAY
LIGHTING.
COM

FLUORESCENT

1-18W PLT



CP DISTRIBUTION



COEFFICIENTS

% CEILING 80 (20% FLOOR)

% WALL	70	50	30
0	73	62	55
1	70	60	52
2	68	57	51
3	66	55	49
4	64	53	47
5	62	51	45
6	59	49	43
7	57	46	41
8	55	42	39
9	53	41	37
10	51	39	35

NOTES

232218

1-18W triple tube
G24q-3 electronic socket
Total lumens: 1250
Spacing criteria: 1.0


BALLAST INFO

DIMMING

- Dimming only available for items marked **◆** on page 1.
- Max. 3' pendant length.
- Voltage *must* be specified.
- Controls lumen output down to $\pm 5\%$.
- Compatible dimmers required for all ballasts.
- **D5** Advance Mark VII for 26W lamp.
- **D8** Lutron Hi-Lume 1% for 26W lamp. Controls lumen output down to $\pm 1\%$.
- **D9** Lutron EcoSystem for 18, 26, 32 or 42W lamp. Controls lumen output down to $\pm 5\%$.

EMERGENCY


- Voltage *must* be specified.
- **EM** emergency power provides 650 lumens for one lamp for 90 minutes. Ht.=15.25"
- **EM13** emergency power provides 1300 lumens for one lamp for 90 minutes. Ht.=18.75"

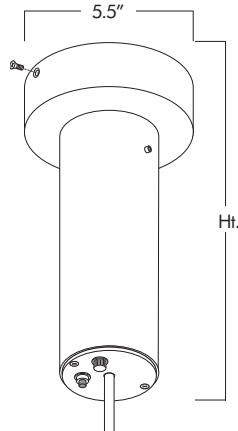

WALL MOUNTING

WALL PREPARATION

- For model 2323.
- Mount holes must be aligned vertical center, as shown:



2329 ARM EXTENSION

- Specify arm length, up to 36" maximum.
Example: **2329X** (X=length)
- Aircraft cable, grip locks and mounting hardware included.

