

# ASPECT REFLECTOR LUMINAIRE

**DELRAY  
LIGHTING  
INCORPORATED**

**2369**



**TYPE:**

**PROJECT:**

**ORDER NUMBER:**

Model#	Paint Finish*	Wattage	Voltage	Ballast
	Hammertone	18, 26,	1-120V	E-Electronic
	Silver	32, 42	2-277V	D5, D8,
	White			D9-Dimming
	CC-Custom			only for items
	RAL color			marked ♦.
				(See back page
				for details.)

**Example:**


2362	W	32	1	E
------	---	----	---	---

\*Paint finish on ballast housing and ceiling canopy only.  
Reflector exterior is matte anodized aluminum.

## ARMATURE

Suspends from cable or rod, constructed of extruded aluminum and is securely fastened to cast wire way top. Ballast fits inside extruded cylinder attached to lamp holder for pull-down access. U.L. listed for damp locations.


**2360**  
Fluorescent




## SURFACE MOUNT

Steel canopy mounts to all recessed J-boxes. Ballast fits inside extruded cylinder **2361** or horizontally in flat canopy **2365**. Specify **EM** for emergency battery pack, available on **2361** only. The 650 lumen battery pack adds 9 3/4" to canopy height, 13 3/4" with the 1300 lumen unit. U.L. listed for damp locations.

**2361**  
Fluorescent




**2365♦**  
Fluorescent




## PENDANT MOUNT

Canopies mount to standard J-box. Ballast fits inside extruded cylinder **2362** or horizontally in flat canopy **2367**. Pendant is 6' standard or can be specified in any length with 12' max. for CFL (3' max. dimming). Specify **EM** for emergency battery pack, available on **2362** only. The 650 lumen battery pack adds 9 3/4" to canopy height, 13 3/4" with the 1300 lumen unit. U.L. listed for damp locations.

**2362**  
Fluorescent




**2367♦**  
Fluorescent




## WALL MOUNT

4" square by 3/16" thick aluminum wall plate mounts to 3" mudring on 2 3/4" vertical, centered holes. Fixture connects to extruded aluminum arm, which is securely fastened to cast wire way top. Ballast fits inside extruded cylinder **2363** or horizontally in flat canopy **2364**. U.L. listed for damp locations.

**2363**  
Fluorescent




**2364♦**  
Fluorescent




BURBANK,  
CALIFORNIA,  
91505  
WWW.  
DELRAY  
LIGHTING.  
COM

## FLUORESCENT

### 1-32W PLT



### CP DISTRIBUTION



### COEFFICIENTS

#### % CEILING 80 (20% FLOOR)

% WALL	70	50	30
0	78	78	78
1	74	72	70
2	70	67	64
3	67	62	59
4	63	58	55
5	60	54	50
6	57	51	47
7	53	47	43
8	51	44	40
9	48	41	37
10	45	39	35

### NOTES

#### 236232

1-32 watt triple tube  
G24q-3 electronic socket  
Total lumens: 2400  
Spacing criteria: 1.2


## BALLAST INFO

### DIMMING

- Dimming only available for items marked **◆** on page 1.
- Max. 3' pendant length.
- Voltage *must* be specified.
- Controls lumen output down to  $\pm 5\%$ .
- Compatible dimmers required for all ballasts.
- **D5** Advance Mark VII for 18, 26, 32 or 42W lamp.
- **D8** Lutron Hi-Lume 1% for 26 or 32W lamp. Controls lumen output down to  $\pm 1\%$ .
- **D9** Lutron EcoSystem for 18, 26, 32 or 42W lamp. Controls lumen output down to  $\pm 5\%$ .

### EMERGENCY

- Voltage *must* be specified.
- **EM** emergency power provides 650 lumens for one lamp for 90 minutes. Ht.=15.25"
- **EM13** emergency power provides 1300 lumens for one lamp for 90 minutes. Ht.=18.75"

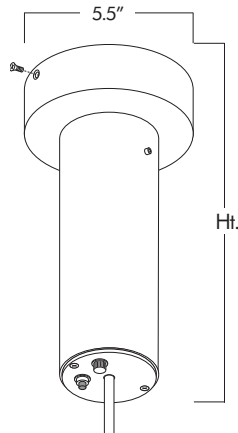


## OPTIONS

**AL**-Acrylic Lens. For security and food service installations.  
Use with CFL lamps *only*.

## WALL MOUNT

### WALL PREPARATION

- For model 2363.
- Mount holes must be aligned vertical center, as shown:



### 2369 ARM EXTENSION

- Specify arm length, up to 36" maximum.  
Example: **2369X** (X=length)
- Aircraft cable, grip locks and mounting hardware included.

