

ASPECT CFL WITH GLASS SHADE



TYPE:

PROJECT:

ORDER NUMBER:

Model#	Paint Finish	Glass Color	Wattage	Voltage	Ballast
	Hammertone	Indigo	18, 26,	1-120V	E-Electronic
	Silver	Marine	32 or 42	2-277V	EM
	White	Opal			EM13
	CC-Custom	Tangerine			D5, D8, D9
	RAL color				

(See back page for details.)


Example:

2432	W	M	32	1	E
------	---	---	----	---	---


PENDANT MOUNT

Canopy mounts to standard J-boxes and supports ballast housing and fixture with 2 steel air craft cables with push button adjustment. Pendant is 6' standard and can be specified in any length. cU.L. listed for damp locations.

2432
CFL




2432EM
CFL

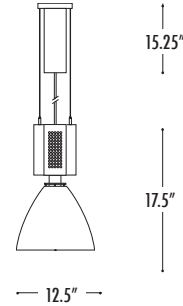

SURFACE MOUNT

Canopy mounts to standard J-boxes and supports ballast housing. cU.L. listed for damp locations.

2431
CFL



DELRAY
LIGHTING
INCORPORATED


241 & 243

BURBANK,
CALIFORNIA,
91505
WWW.
DELRAY
LIGHTING.
COM


JUN 2017

32W CFL

1-32W PLT



CP DISTRIBUTION



COEFFICIENTS

	% CEILING 80 (20% FLOOR)		
	% WALL 70	50	30
0	82	82	82
1	76	73	70
2	70	65	61
3	66	59	55
4	61	54	49
5	57	49	44
6	53	45	39
7	49	41	36
8	46	37	32
9	43	34	29
10	39	31	25

NOTES

238232

1-32W triple tube
 G24q-3 electronic socket
 Total lumens: 2400
 Spacing criteria: 1.2


BALLAST INFO

DIMMING

- Voltage *must* be specified.
- Controls lumen output down to $\pm 5\%$.
- Compatible dimmers required for all ballasts.
- **D5** Advance Mark VII for 18, 26, 32 or 42W lamp.
- **D8** Lutron Hi-Lume 1% for 26 or 32W lamp. Controls lumen output down to $\pm 1\%$.
- **D9** Lutron EcoSystem for 18, 26, 32 or 42W lamp. Controls lumen output down to $\pm 5\%$.

EMERGENCY

- Voltage *must* be specified.
- **EM** emergency power provides 650 lumens for one lamp for 90 minutes. Ht.=15.25"
- **EM13** emergency power provides 1300 lumens for one lamp for 90 minutes. Ht.=18.75"

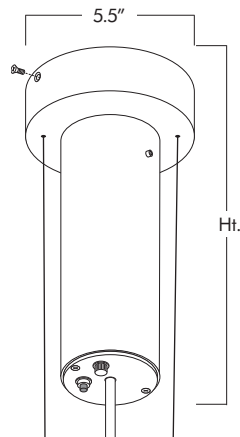

OPTIONS

AL-Acrylic Lens. For security and food service installations. Use with CFL lamps *only*.