

KONE II CLEAR W/ ETCHED GLASS LUMINAIRE WITH DOWNLIGHT

**DELRAY
LIGHTING
INCORPORATED**

6222



TYPE:

PROJECT:

ORDER NUMBER:

Model#	Wattage	Voltage	Option
	26, 32, 42 or 57 CFL	1 -120V 2 -277V	EM -Emergency Battery Pack
	70 or 100 Metal Halide		D3, D5, D8 or D9 -Dimming (See Back Page)

Example:

6222	26	1	EM
------	----	---	----

KONE CLEAR PENDANT

Canopy mounts to standard J-box. Compact fluorescent electronic ballast fits inside fixture for easy access, metal halide ballast is in canopy.


Pendant is 6 ft. standard (3 ft. max. for dimming and EM), with push button adjustable aircraft cable. Canopy finish is black with steel braided power cord.

Clear glass upper/opal glass lower shade for general illumination, with clad aluminum downlight reflector for task lighting.


Fixtures have a twist lock socket for secure, easy relamping. Dimming and emergency battery backup is available for CFL.

cU.L. listed for damp locations.


6222
Fluorescent




6223
Metal Halide
70/100W



6222D/EM ♦
Fluorescent,
Dimming & EM



6222EM ♦
Fluorescent,
Emergency
Battery Pack
*See back page.

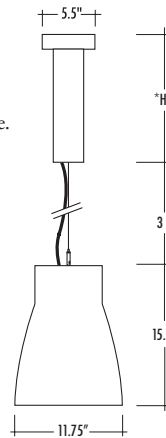


**BURBANK,
CALIFORNIA,
91505
WWW.
DELRAY
LIGHTING.
COM**

FLUORESCENT


BALLAST INFO

OPTIONS

1-42W PLT



CP DISTRIBUTION

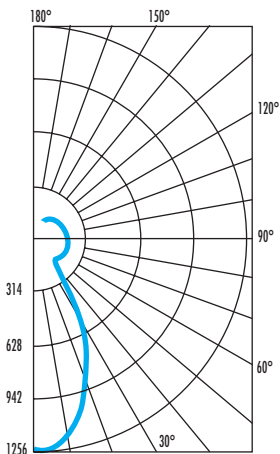

COEFFICIENTS OF UTILIZATION

% CEILING 80 (20% FLOOR)

% WALL	70	50	30
0	73	73	73
1	65	61	58
2	59	54	49
3	54	48	42
4	50	43	37
5	46	39	33
6	43	35	30
7	40	32	27
8	37	29	24
9	35	27	22
10	33	25	20

NOTES

6222.42

1-42W triple tube
G24q-3 electronic twist lock socket
Total lumens: 3200
Spacing criteria: .78


METAL HALIDE
Use only medium base, coated and
protected, ceramic metal halide
ED17 lamps.

DIMMING

- Dimming only available for items marked **◆** on page 1.
- Voltage *must* be specified.
- 3 ft. cord length standard.
- Controls lumen output down to $\pm 5\%$.
- Compatible dimmers required for all ballasts.
- **D3** Advance Mark X for 26, 32 or 42W lamp.
- **D5** Advance Mark VII for 26, 32 or 42W lamp.
- **D8** Lutron Hi-Lume 1% for 26 or 32W lamp. Controls lumen output down to $\pm 1\%$.
- **D9** Lutron EcoSystem for 18, 26, 32 or 42W lamp. Controls lumen output down to $\pm 5\%$.

EMERGENCY

- Voltage *must* be specified.
- Max. 3 ft. cord length.
- **EM** emergency power provides 650 lumens for one lamp for 90 minutes. Ht.=15.25"
- **EM13** emergency power provides 1300 lumens for one lamp for 90 minutes. Ht.=19"

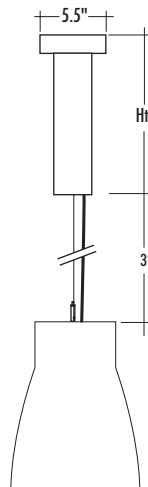

AL-Acrylic Lens. For security and food service installations. Use with CFL lamps *only*.