

# ROCKET I FROSTED LENSED LOWBAY



**TYPE:**

**PROJECT:**

**ORDER NUMBER:**


Model#	Lamp Qty.	Wattage	Ballast	Options*
	1, 2, 3	26-42 CFL	UE, SS	EM—Emergency Dimming:
	1			<b>D5, D8 or D9</b>
	1			<b>CM1</b>
	1			<i>*See Back Page</i>

## COMPACT FLUORESCENT

Spun matte anodized .063 aluminum housing. Canopy mounts to standard J-boxes, suspends from aircraft cables with push button gliders and is supplied with a 6' power cord. Sockets and ballasts operate 26, 32 and 42W triple tubes. Lens and component design provides maximum airflow for cool operation. Voltage is 120 through 277V. **SS**— separate switching. **D**—dimming. **EM**— emergency battery pack, igniting one lamp at 650 lumens for 90 minutes. Voltage must be specified. U.L. listed for damp locations.


### 7710

Fluorescent

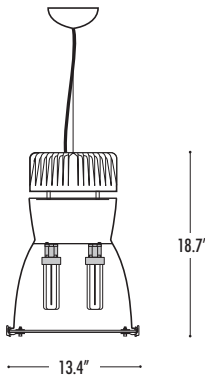

### 7710/EM

Fluorescent  
Emergency  
Pack

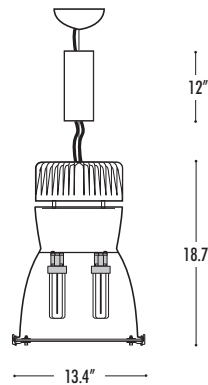


**DELRAY  
LIGHTING  
INCORPORATED**

**7710**

BURBANK,  
CALIFORNIA,  
91505  
WWW.  
DELRAY  
LIGHTING.  
COM


## LENSED LOWBAY

7710332



## LENSED LOWBAY

7710342



## CONE OF LIGHT



MTG. HT.	FC/0°	DIA.
4'	68	6.3
6'	30	9.4
8'	17	12.5
10'	11	15.6
12'	8	18.8

50% FC at edge

MTG. HT.	FC/0°	DIA.
4'	93	6.3
6'	41	9.4
8'	23	12.5
10'	15	15.6
12'	10	18.8

50% FC at edge

## CP DISTRIBUTION



## COEFFICIENTS OF UTILIZATION

% CEILING 80 (20% FLOOR)	% WALL 70 (20% FLOOR)		
	70	50	30
0	59	59	59
1	55	53	51
2	51	48	45
3	47	43	40
4	44	39	35
5	41	35	32
6	38	32	28
7	35	29	25
8	33	27	23
9	30	24	20
10	27	21	17

% CEILING 80 (20% FLOOR)	% WALL 70 (20% FLOOR)		
	70	50	30
0	58	58	58
1	54	53	51
2	51	48	45
3	47	43	40
4	44	39	35
5	41	35	32
6	38	32	28
7	35	29	25
8	33	27	23
9	30	24	20
10	27	21	17

## NOTES

**7710332**

3-32W triple tube  
G24q-3 socket  
Total lumens: 7200  
Spacing criteria: 1.4

**7710342**

3-42W triple tube  
G24q-4 socket  
Total lumens: 9600  
Spacing criteria: 1.4

## BALLAST INFO

- Standard in universal voltage 120V through 277V.
- **UE**—Universal electronic
- **SS**—Separate switching for three lamps *only*.
- All **UE** and **SS** models have sockets and ballasts that operate 26, 32 and 42W lamps.

## DIMMING

**D5**—Advance Mark VII:

- Voltage *must* be specified, 120V or 277V.
- Max. wattage: 3x 26/32/42.
- Range: 5–100%
- Control wires: 2 low voltage
- Dimmers: one 10V analog

**D8**—Lutron Hi-Lume:

- Voltage *must* be specified, 120V or 277V.
- Max. wattage: 2x 26/32W. (Requires two ballasts.)
- 1% for 26 or 32W lamp
- Controls lumen output down to ±1%.

**D9**—Lutron EcoSystem:

- Voltage *must* be specified, 120V or 277V.
- Max. wattage: 3x 26/32/42.
- Range: 5–100%
- Control wires: orange and/or purple/gray
- Dimmers: Lutron only

## LENS

Frosted  $\frac{3}{16}$ " tempered, soda lime glass with 2" ventilation opening, silkscreen logo. Secured with a rubber gasket, the lens is held in place by three positive-locking clamps.

## EXTERIOR LOCATIONS

**CM1**— $\frac{1}{2}$ " ID hard stem option, supplied with swivel canopy for earthquake code, sloped ceilings, and indoor areas with light air movement (e.g., near HVAC vents). Pipe replaces power cord and cable. Length must be specified.

Pipe longer than 8 ft. will be shipped in two sections—one 8 ft., the other for the balance—with painted, threaded pipe coupler and set screws.

