

ROCKET I SPECULAR ALZAK OPEN HIGHBAY



TYPE:

PROJECT:

ORDER NUMBER:

Model#	Lamp Qty.	Wattage	Ballast	Options*
	1, 2, 3	26-42 CFL	UE, SS	EM -Emergency
	1			Dimming:
	1			D5, D8 or D9
	1			CM1
				<i>*See Back Page</i>


**DELRAY
LIGHTING
INCORPORATED**

7714


COMPACT FLUORESCENT

Spun matte anodized .063 aluminum housing. Canopy mounts to standard J-boxes, suspends from aircraft cables with push button gliders and is supplied with a 6' power cord. Sockets and ballasts operate 26, 32 and 42W triple tubes. Voltage is 120 through 277V. **SS**- separate switching. **D**-dimming. **EM**- emergency battery pack, igniting one lamp at 650 lumens for 90 minutes. Voltage must be specified. U.L. listed for damp locations.

7714
Fluorescent

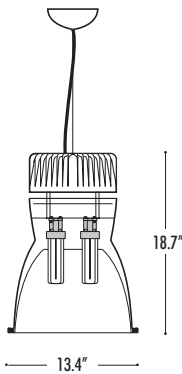

7714/EM
Fluorescent
Emergency
Pack

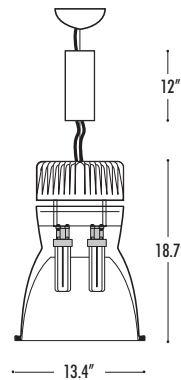


NOTE: Aircraft cable suspension is not recommended for outdoor use, where fixture will be exposed to water, or subject to wind oscillation. Avoid use near HVAC vents and in environments with corrosive chemical vapors, such as swimming pools.

BURBANK,
CALIFORNIA,
91505
WWW.
DELRAY
LIGHTING.
COM


OPEN HIGHBAY

7714332



OPEN HIGHBAY

7714342



CONE OF LIGHT



MTG. HT.	FC/0°	DIA.
4'	222	4.3
6'	99	6.4
8'	56	8.55
10'	36	10.6
12'	25	12.8

50% FC at edge

MTG. HT.	FC/0°	DIA.
4'	296	4.3
6'	132	6.4
8'	74	8.55
10'	47	10.6
12'	33	12.8

50% FC at edge

CP DISTRIBUTION



COEFFICIENTS OF UTILIZATION

% CEILING	80 (20% FLOOR)		
	70	50	30
0	70	70	70
1	68	66	65
2	65	63	61
3	63	60	58
4	60	57	54
5	58	54	52
6	56	52	49
7	54	49	47
8	52	47	44
9	49	45	42
10	46	40	37

% CEILING	80 (20% FLOOR)		
	70	50	30
0	69	69	69
1	66	65	64
2	64	62	60
3	62	59	56
4	59	56	53
5	57	53	50
6	55	51	48
7	53	48	46
8	53	48	46
9	48	44	41
10	45	39	36

NOTES

7714332

3-32W triple tube
G24q-3 socket
Total lumens: 7200
Spacing criteria: 1.0

7714342

3-42W triple tube
G24q-4 socket
Total lumens: 9600
Spacing criteria: 1.0

BALLAST INFO

- Standard in universal voltage 120V through 277V.
- **UE**—Universal electronic
- **SS**—Separate switching for three lamps *only*.
- All **UE** and **SS** models have sockets and ballasts that operate 26, 32 and 42W lamps.

DIMMING

D5—Advance Mark VII:

- Voltage *must* be specified, 120V or 277V.
- Max. wattage: 3x 26/32/42.
- Range: 5–100%
- Control wires: 2 low voltage
- Dimmers: one 10V analog

D8—Lutron Hi-Lume:

- Voltage *must* be specified, 120V or 277V.
- Max. wattage: 2x 26/32W. (Requires two ballasts.)
- 1% for 26 or 32W lamp
- Controls lumen output down to ±1%.

D9—Lutron EcoSystem:

- Voltage *must* be specified, 120V or 277V.
- Max. wattage: 3x 26/32/42.
- Range: 5–100%
- Control wires: orange and/or purple/gray
- Dimmers: Lutron only

LENS

Frosted 3/16" tempered, soda lime glass with 2" ventilation opening, silkscreen logo. Secured with a rubber gasket, the lens is held in place by three positive-locking clamps.

EXTERIOR LOCATIONS

CM1—1/2" ID hard stem option, supplied with swivel canopy for earthquake code, sloped ceilings, and indoor areas with light air movement (e.g., near HVAC vents). Pipe replaces power cord and cable. Length must be specified.

Pipe longer than 8 ft. will be shipped in two sections—one 8 ft., the other for the balance—with painted, threaded pipe coupler and set screws.

