

ASPECT GLASS LED WITH SHADE

**DELRAY
LIGHTING
INCORPORATED**

AL2297



TYPE:

PROJECT:

ORDER NUMBER:

| Model# | Paint Finish | Glass Color | LEDs | Options |
|---------------|-----------------------------|------------------|------------|----------------------------------|
| AL2297 | Hammertone | Indigo | W30 | D9 |
| | Silver | Marine | W35 | ALEM |
| | White | Opal | W40 | XP —extra pendant length* |
| | CC —Custom RAL color | Tangerine | | |

Example:

| | | | | |
|--------|---|---|-----|-----|
| AL2297 | S | O | W35 | D4A |
|--------|---|---|-----|-----|

CONSTRUCTION

- Canopy mounts to standard J-boxes
- Die cast aluminum housing and heat sink.
- Handblown glass shade.
- 6 ft. power cord standard. Order **XP** for additional pendant length.

LED DRIVERS


- Standard drivers are constant current, universal voltage, with 0–10V dimming to 1%.
- Driver housed inside canopy for easy access.
- Emergency Battery Pack (**ALEM**) provides 7W for 90 mins. Voltage must be specified.
- cU.L. listed for damp locations.

LEDs

- Bridgelux Vero 18 COB LEDs provide 3,780 lumens at 1,050 Ma, at 31W.
- Available in two white color temperatures: **W30** (3000° K), **W35** (3500° K), and **W40** (4000° K).
- CRI = 90

AL2297

LED
3,780 lumens
31 watts

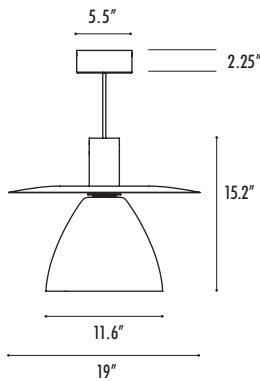


Specify LED color:

- W30**—White (3000° K)
- W35**—White (3500° K)
- W40**—White (4000° K)

ALEM

Emergency

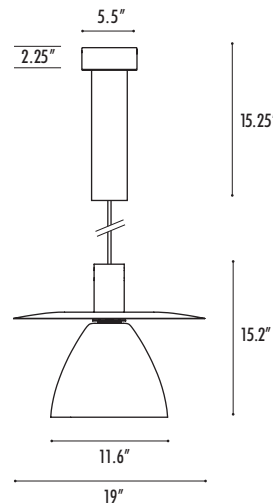


**BURBANK,
CALIFORNIA,
91505
WWW.
DELRAY
LIGHTING.
COM**

MAR 2018

LED

AL2297.W35



CP DISTRIBUTION

Pending

COEFFICIENTS

Pending

NOTES

AL2297.W35

31W LEDs
Total lumens: 3,780

AL2297 – LED

These LED luminaires that provide conventional footcandle levels at less than or equal to 1.4W/FT².

Bridgelux Vero 18 COB LEDs provide 3,780 lumens at 1,050 Ma, at 31W, and are available in two white color temperatures: **W30** (3000° K), **W35** (3500° K), and **W40** (4000° K). CRI = 90, R9 = 5.

cUL rated for dry locations only.

LM-79 TEST SUMMARY – AL2297.W35

Pending

OPTIONS

STANDARD DIMMING

Energy management, dim to 5%, 0–10V.

DIMMING OPTIONS

D9–Lutron Hi-Lume L3DA Series 3-wire. Dims to 1%.

EMERGENCY

Emergency Battery Pack provides 7W for 90 mins. Order **ALEM**. Voltage must be specified.

