

ASPECT GLASS LED WITH SHADE

**DELRAY
LIGHTING
INCORPORATED**

AL2297



TYPE:

PROJECT:

ORDER NUMBER:

Model#	Paint Finish	Glass Color	LEDs	Options
AL2297	Hammertone	Indigo	W30	D9
	Silver	Marine	W35	ALEM
	White	Opal	W40	XP —extra pendant length*
	CC —Custom RAL color	Tangerine		

Example:

AL2297	S	O	W35	D4A
--------	---	---	-----	-----

CONSTRUCTION

- Canopy mounts to standard J-boxes
- Die cast aluminum housing and heat sink.
- Handblown glass shade.
- 6 ft. power cord standard. Order **XP** for additional pendant length.

LED DRIVERS


- Standard drivers are constant current, universal voltage, with 0–10V dimming to 1%.
- Driver housed inside canopy for easy access.
- Emergency Battery Pack (**ALEM**) provides 7W for 90 mins. Voltage must be specified.
- cU.L. listed for damp locations.

LEDs

- Bridgelux Vero 18 COB LEDs provide 3,780 lumens at 1,050 Ma, at 31W.
- Available in two white color temperatures: **W30** (3000° K), **W35** (3500° K), and **W40** (4000° K).
- CRI = 90

AL2297

LED
3,780 lumens
31 watts

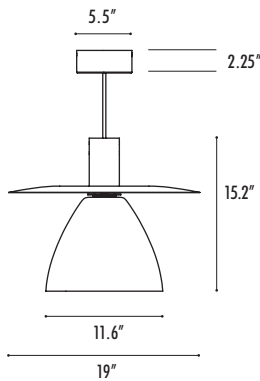


Specify LED color:

- W30**—White (3000° K)
- W35**—White (3500° K)
- W40**—White (4000° K)

ALEM

Emergency

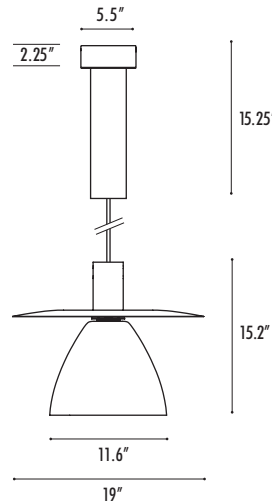

**BURBANK,
CALIFORNIA,
91505
WWW.
DELRAY
LIGHTING.
COM**

MAR 2018