

## ASPECT LED GLASS

**DELRAY**  
LIGHTING  
INCORPORATED

**AL2387**



**TYPE:**

**PROJECT:**

**ORDER NUMBER:**

Model#	Paint Finish	Glass Color	LEDs	Options
<b>AL2387</b>	<b>Hammertone</b>	<b>Indigo</b>	<b>W30</b>	<b>D9</b>
	<b>Silver</b>	<b>Marine</b>	<b>W35</b>	<b>ALEM</b>
	<b>White</b>	<b>Opal</b>	<b>W40</b>	<b>XP</b> —extra pendant length*
	<b>CC</b> —Custom RAL color	<b>Tangerine</b>		

**Example:**

AL2387	S	O	W35	D4A
--------	---	---	-----	-----

### CONSTRUCTION

- Canopy mounts to standard J-boxes
- Die cast aluminum housing and heat sink.
- Handblown glass shade.
- 6 ft. power cord standard. Order **XP** for additional pendant length.

### LED DRIVERS


- Standard drivers are constant current, universal voltage, with 0–10V dimming to 1%.
- Driver housed inside canopy for easy access.
- Emergency Battery Pack (**ALEM**) provides 7W for 90 mins. Voltage must be specified.
- cU.L. listed for damp locations.

### LEDs

- Bridgelux Vero 18 COB LEDs provide 3,780 lumens at 1,050 Ma, at 31W.
- Available in two white color temperatures: **W30** (3000° K), **W35** (3500° K), and **W40** (4000° K).
- CRI = 90, R9 = 50


### AL2387

LED  
2,791 lumens  
31 watts



### ALEM

Emergency

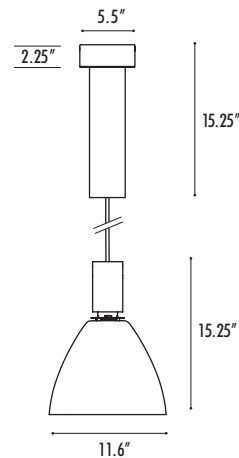

*Specify LED color:*

- W30**—White (3000° K)
- W35**—White (3500° K)
- W40**—White (4000° K)

BURBANK,  
CALIFORNIA,  
91505  
WWW.  
DELRAY  
LIGHTING.  
COM

MAR 2018