

# SONAR I LED FROSTED LENS LOWBAY WITH UPLIGHT



**TYPE:**

**PROJECT:**

**ORDER NUMBER:**

Model#	Milliamps	LEDs	Voltage	Options
<b>IL7701</b>	<b>1,050</b>	<b>W30</b>	<b>1-120V</b>	<b>EM</b> —Emergency Battery Pack <b>D9A</b> —Lutron dimming driver*  <b>XP</b> —extra pendant length**
	<b>750</b>	<b>W35</b>	<b>2-277V</b>	
	<b>500</b>	<b>W40</b>		

\*See back page for details.

\*\*Specify extra pendant length (in inches): \_\_\_\_\_

**DELRAY LIGHTING INCORPORATED**  
**IL7701**

## CONSTRUCTION

- Spun matte anodized .063 aluminum housing.
- Canopy mounts to standard J-boxes, suspends from aircraft cables with push button gliders.
- Standard mount is 6 ft. adjustable aircraft cable and power cord. Order **XP** for extra pendant length.

## LENS

- Frosted  $\frac{3}{16}$ " tempered, soda lime glass with 2" ventilation opening, silkscreen logo. Secured with a rubber gasket, the lens is held in place by three positive-locking clamps.

## LED DRIVERS

- Two separately-switched, constant current, 0–10V dimming, universal voltage drivers, standard.
- cU.L. listed for dry locations only.
- **EM**—emergency battery pack, which ignites LED array to 650 lumens for 90 minutes. Voltage *must* be specified.


## LEDs

- Nichia Corp. chips, available in three white color temperatures: **W30** (3000° K), **W35** (3500° K), and **W40** (4000° K).

### IL7701


50 watts down  
5,000 lumens

18 watts up  
1,750 lumens



### IL7701/EM

Emergency Battery Pack



Specify LED color:

**W30**—White (3000° K)

**W35**—White (3500° K)

**W40**—White (4000° K)


**BURBANK,  
CALIFORNIA,  
91505  
WWW.  
DELRAY  
LIGHTING.  
COM**

## LENSED LOWBAY

### IL7701.W35



## CP DISTRIBUTION

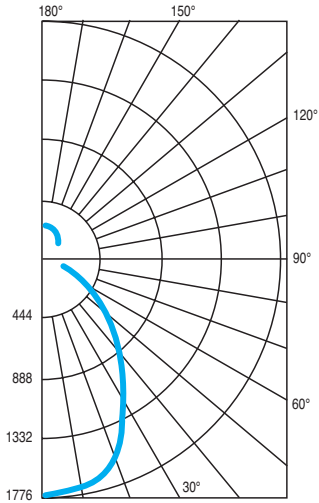

## COEFFICIENTS

% CEILING 80 (20% FLOOR)			
% WALL	70	50	30
0	115	115	115
1	106	102	98
2	98	90	84
3	90	80	73
4	83	72	64
5	77	65	57
6	71	59	51
7	66	54	46
8	62	49	42
9	58	46	38
10	54	42	35

## NOTES

### IL7701.W35

66W / 1,050 mA / 3500K LEDs

Total lumens: 4,105

Spacing criteria: 1.06

mA	Multiplier
1050 max.	1.0
750 max.	0.70
500 max.	0.50

## IL7701-LED

These LED luminaires that provide conventional footcandle levels at less than or equal to 1.4W/FT<sup>2</sup>.

Featuring Nichia Corp. chips, available in three white color temperatures: **W30** (3000° K), **W35** (3500° K), and **W40** (4000° K); matching the traditional CCT of existing incandescent, fluorescent, and metal halide lamps.

cUL rated for dry locations only.

## LM-79 TEST SUMMARY - 7701.W35

<b>Driver:</b>	Philips Advance
<b>Total Lumens:</b>	4,105
<b>Input Power (W):</b>	66
<b>Efficacy:</b>	62
<b>Color Rendering Index (CRI):</b>	86

### CAUTION

Aircraft cable suspension is not recommended for outdoor use, where fixture will be exposed to water, or subject to wind oscillation. Avoid use near HVAC vents and in environments with corrosive chemical vapors, such as swimming pools.

## DIMMING

### STANDARD

- Constant current, 0–10V universal voltage, 10%.

### LUTRON DRIVER OPTION

- D9A** – Lutron Hi-Lume A-Series LED Driver (1%).
- EcoSystem (3-wire) control.
- 40–53W, universal voltage (120–277V).
- Constant current (1.05A) driver, with pulse width modulation (PWM) dimming.