

ROCKET II LED FROSTED LENS LOWBAY



TYPE:

PROJECT:

ORDER NUMBER:

Model#	Milliamps	LEDs	Voltage	Options
IL7810	1,050	W30	1-120V	EM —Emergency Battery Pack D9A —Lutron dimming driver* XP —extra pendant length**
	750	W35	2-277V	
	500	W40		

*See back page for details.

**Specify extra pendant length (in inches): _____

CONSTRUCTION

- Spun matte anodized .063 aluminum housing.
- Canopy mounts to standard J-boxes, suspends from aircraft cables with push button gliders.
- Standard mount is 6 ft. adjustable aircraft cable and power cord. Order **XP** for extra pendant length.

LENS

- Frosted $\frac{3}{16}$ " tempered, soda lime glass with 2" ventilation opening, silkscreen logo. Secured with a rubber gasket, the lens is held in place by three positive-locking clamps.

LED DRIVERS


- Constant current, 0–10V, dimming to 10%, universal voltage driver.
- cU.L. listed for dry locations only.
- **EM**—emergency battery pack, which ignites LED array to 650 lumens for 90 minutes. Voltage must be specified.

LEDs

- Nichia Corp. chips, available in three white color temperatures: **W30** (3000° K), **W35** (3500° K), and **W40** (4000° K).


IL7810

30, 40, 50W
LED

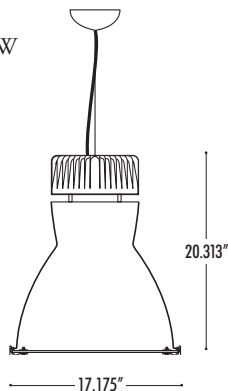

IL7810/EM

Emergency
Battery Pack

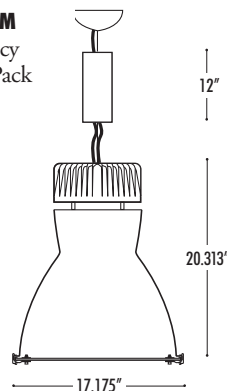

Specify LED color:

W30—White (3000° K)

W35—White (3500° K)

W40—White (4000° K)

**DELRAY
LIGHTING
INCORPORATED**


IL7810

**BURBANK,
CALIFORNIA,
91505
WWW.
DELRAY
LIGHTING.
COM**


MAR 2018

LENSED LOWBAY

IL7810.W35



CP DISTRIBUTION

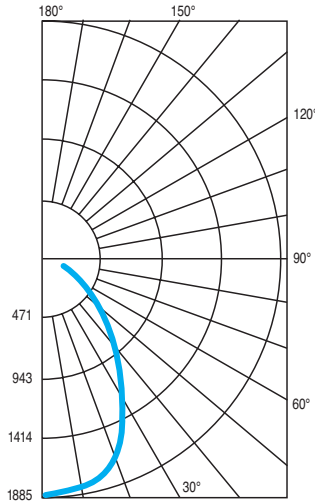

COEFFICIENTS

% CEILING 80 (20% FLOOR)			
% WALL	70	50	30
0	119	119	119
1	110	106	103
2	102	95	89
3	94	85	77
4	87	76	68
5	80	69	61
6	75	63	55
7	70	57	49
8	65	53	45
9	61	49	41
10	58	46	38

NOTES

IL7810.W35

50W 3500° K LEDs
 Total lumens: 3,558
 Spacing criteria: 1.06

Watts	Lumens	mA
50	3,558	1,050
35	2,490	750
23	1,680	500

IL7810 - LED

These LED luminaires that provide conventional footcandle levels at less than or equal to 1.4W/FT².

Featuring Nichia Corp. chips, available in three white color temperatures: **W30** (3000° K), **W35** (3500° K), and **W40** (4000° K); matching the traditional CCT of existing incandescent, fluorescent, and metal halide lamps.

cUL rated for dry locations only.

LM-79 TEST SUMMARY - 7810L50W35

Driver:	Philips Advance
Total Lumens:	3558.08
Input Power (W):	57.30
Efficacy:	66.68
Color Rendering Index (CRI):	87

CAUTION

Aircraft cable suspension is not recommended for outdoor use, where fixture will be exposed to water, or subject to wind oscillation. Avoid use near HVAC vents and in environments with corrosive chemical vapors, such as swimming pools.

DIMMING

STANDARD

- Constant current, 0–10V universal voltage, 10%.

LUTRON DRIVER OPTION

- D9A** – Lutron Hi-Lume A-Series LED Driver (1%).
- EcoSystem (3-wire) control.
 - 40–53W, universal voltage (120–277V).
 - Constant current (1.05A) driver, with pulse width modulation (PWM) dimming.