

PENDANT AND WALL MOUNT LUMINAIRES

**DELRAY
LIGHTING
INCORPORATED**

**P1
&
P2**



TYPE:

PROJECT:

NOTES:

DESCRIPTION:

P1

ORDER#

- P113** 13W quad
- P118** 18W triple
- P142** 26, 32 or 42W triple
- P1150** 150W incandescent

SPECIFY FINISH:



- B**—Black
- G**—Green
- SL**—Silver
- P**—White
- CC**—Custom RAL Color. Specify:

BALLAST

- 1E**—120V electronic
- 2E**—277V electronic

OPTIONS

- WM1**—Wall Mount
- WM2**—Wall Mount
- CM1**—Ceiling Mount
- PWB**—Surface Mount J-Box



P2

ORDER#

- P213** 13W quad
- P218** 18W triple
- P242** 26, 32 or 42W triple
- P2150** 150W incandescent

SPECIFY FINISH:



- B**—Black
- G**—Green
- SL**—Silver
- P**—White
- CC**—Custom RAL Color. Specify:

BALLAST

- 1E**—120V electronic
- 2E**—277V electronic

OPTIONS

- WM1**—Wall Mount
- WM2**—Wall Mount
- CM1**—Ceiling Mount
- PWB**—Surface Mount J-Box



SPECIFICATION INFORMATION

PENDANT MOUNT

- Galvanized canopy mounts to octagonal box, with ballast attached for easy servicing.
- Powder coat finish (must specify).
- Supplied with 6' pendant (**P1** only).
- U.L. rated for damp locations.

SURFACE MOUNT

- Galvanized bracket mounts to octagonal box, with ballast attached for easy servicing.

- Covered by spun steel canopy, with powder coat finish (must specify).
- Specify **WM1**, **WM2** for wall mount. (*See back page.*)
- Order **CM1** for ceiling mount.
- U.L. rated for wet locations.

BALLAST

- Electronic ballasts are class P, HPF .
- Supplied standard in 120V and 277V.

- Ballasts use 4 pin lamps and provide rapid start.
- .99 power factor with THD<10%.
- End of lamp life protection.

OPTIONS

- **CM1**—Ceiling Mount (specify length)
- **WM1**—Wall Mount
- **WM2**—Wall Mount
- **PWB**—Surface Mount J-box

**BURBANK,
CALIFORNIA,
91505
WWW.
DELRAY
LIGHTING.
COM**

32 WATT PLT

P1



32 WATT PLT

P2



BALLAST INFO

- Standard in universal voltage 120V through 277V.
- Thermally protected rapid start electronic ballasts use 4-pin lamps
- .99 power factor with THD<10%.
- End of lamp life protection.

CONE OF LIGHT

MTG. HT.	FC/O*	DIA.
4'	64	2.6
6'	28	3.9
8'	16	5.2
10'	10	6.5
12'	7	7.8


50% FC at edge

FC ON WALL

MTG. HT.	FOOTCANDLES		
	n	Units 2' apart	n
2'	36	39	36
4'	25	26	25
6'	13	14	13
8'	10	10	10
10'	9	9	9


Units 2 feet from wall and 2 feet apart
Based on 1-32 watt lamp

CP DISTRIBUTION




WALL MOUNT DIMENSIONS

WM1

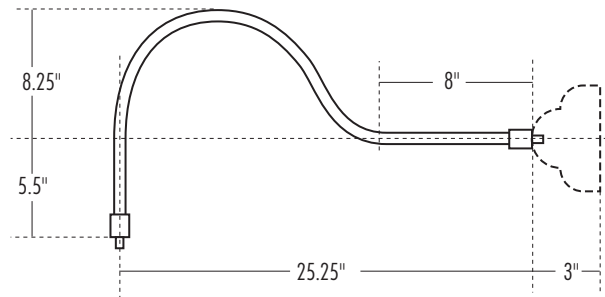


WM2

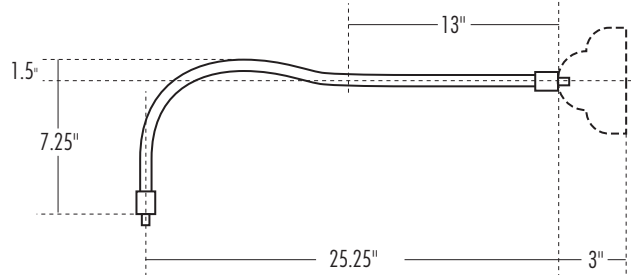


PIPE MOUNT OPTIONS

PWB—Surface mount 4.6" cast square J-box replaces standard canopy and allows 1/2" conduit from two sides (not available with dimming ballasts).



CM1—Pipe mount. Length must be specified.



CU

% CEILING 80 (20% FLOOR)

% WALL	70	50	30
0	66	66	66
1	62	61	59
2	59	57	55
3	57	53	50
4	53	49	46
5	50	46	43
6	48	43	39
7	45	39	36
8	42	36	33
9	39	33	30
10	35	29	25