

PENDANT AND WALL MOUNT LUMINAIRES

DELRAY
LIGHTING
INCORPORATED

P3 & P4



TYPE:

PROJECT:

NOTES:

DESCRIPTION:

P3

ORDER#

- P313** 13W quad
- P318** 18W triple
- P342** 26, 32 or 42W triple
- P3150** 150W incandescent

SPECIFY FINISH:



- B**—Black
- G**—Green
- SL**—Silver
- P**—White
- CC**—Custom RAL Color. Specify:

BALLAST

- 1E**—120V electronic
- 2E**—277V electronic

OPTIONS

- WM1**—Wall Mount
- WM2**—Wall Mount
- CM1**—Ceiling Mount
- PWB**—Surface Mount J-Box



P4

ORDER#

- P413** 13W quad
- P418** 18W triple
- P442** 26, 32 or 42W triple
- P4150** 150W incandescent

SPECIFY FINISH:



- B**—Black
- G**—Green
- SL**—Silver
- P**—White
- CC**—Custom RAL Color. Specify:

BALLAST

- 1E**—120V electronic
- 2E**—277V electronic

OPTIONS

- WM1**—Wall Mount
- WM2**—Wall Mount
- CM1**—Ceiling Mount
- PWB**—Surface Mount J-Box



SPECIFICATION INFORMATION

PENDANT MOUNT

- Galvanized canopy mounts to octagonal box, with ballast attached for easy servicing.
- Powder coat finish (must specify).
- Supplied with 6' pendant.
- U.L. rated for damp locations.

SURFACE MOUNT

- Galvanized bracket mounts to octagonal box, with ballast attached for easy servicing.

- Covered by spun steel canopy, with powder coat finish (must specify).
- Specify **WM1**, **WM2** for wall mount.
- Order **CM1** for ceiling mount.
- U.L. rated for wet locations.

BALLAST

- Electronic ballasts are class P, HPF .
- Supplied standard in 120V and 277V.
- Ballasts use 4 pin lamps and provide rapid start.

- .99 power factor with THD<10%.
- End of lamp life protection.


OPTIONS

- **CM1**—Ceiling Mount (specify length)
- **WM1**—Wall Mount
- **WM2**—Wall Mount
- **PWB**—Surface Mount J-box

BURBANK,
CALIFORNIA,
91505
WWW.
DELRAY
LIGHTING.
COM

32 WATT PLT

P4



BALLAST INFO


- Standard in universal voltage 120V through 277V.
- Thermally protected rapid start electronic ballasts use 4-pin lamps
- .99 power factor with THD<10%.
- End of lamp life protection.

CONE OF LIGHT

MTG. HT.	FC/0°	DIA.
4'	31	5.8
6'	14	8.7
8'	8	11.6
10'	5	14.5
12'	3	17.4

50% FC at edge

CP DISTRIBUTION




CU

% CEILING 80 (20% FLOOR)


% WALL	70	50	30
0	66	66	66
1	62	61	59
2	59	57	55
3	57	53	50
4	53	49	46
5	50	46	43
6	48	43	39
7	45	39	36
8	42	36	33
9	39	33	30
10	35	29	25

WALL MOUNT DIMENSIONS

WM1

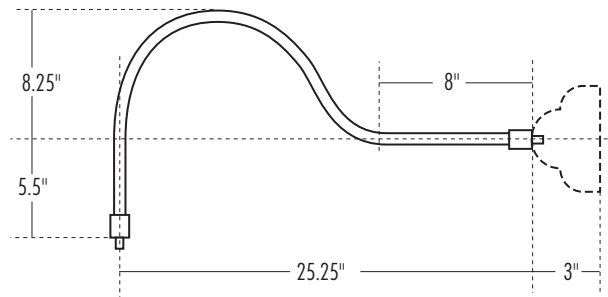


WM2

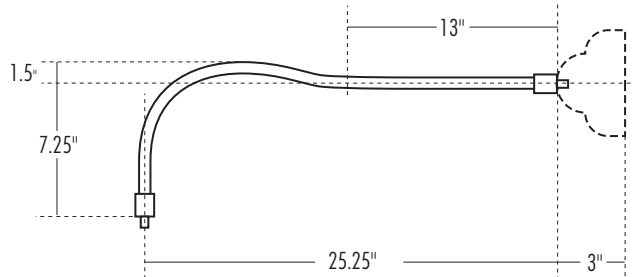

PIPE MOUNT OPTIONS

PWB—Surface mount 4.6" cast square J-box replaces standard canopy and allows 1/2" conduit from two sides (not available with dimming ballasts).



CM1—Pipe mount. Length must be specified.

