


UNO SPIRAL DIRECT WHITE LED CHANDELIER WITH OPAL ACRYLIC LENS

TYPE: _____ **PROJECT:** _____

ORDER NUMBER: _____

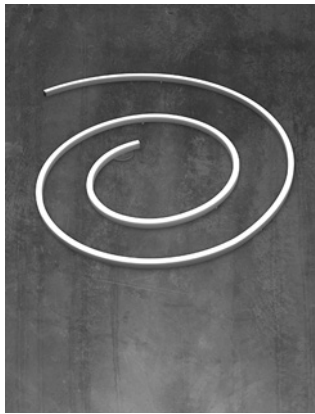


Model#	Finish	LEDs	Dimming
UCSPIRAL	S –Silver W –White K –Black CC –Custom*	W30 W35 W40	BDIM-W11
		Red Blue SQ–RGB	BDMXMOD

Example:

- BTRAXW**–Traxon Light Drive (enter quantity): _____
- XL**–custom lumen reduction (specify lumens): _____

*RAL color must be specified:
www.tiger-coatings.us

UCSPIRAL
 8,365 lumens, 84W




DELRAY LIGHTING INCORPORATED
UNO SPIRAL

**BURBANK,
 CALIFORNIA,
 91505
 WWW.
 DELRAY
 LIGHTING.
 COM**

SPIRAL

UCSPIRAL



CP DISTRIBUTION

Pending

COEFFICIENTS

Pending

NOTES

UCSPIRAL

84W 3500° K LEDs
 Total lumens: 8,365
 Total luminaire efficacy: 78%

ACRYLIC DIFFUSER CLEANING

Warning: Do not clean with ammonia based cleaners (e.g. Windex®). Use only water or cleaners specifically formulated for cleaning plastics.

UNO SPIRAL LED

CONSTRUCTION

Extruded aluminum outer housing with direct white frosted acrylic diffuser. Surface mount only.

WHITE LEDs

Nichia Corp. NFSL757 tight bin chips on aluminum clad boards. White color temperature LEDs are **W30** (3000K), **W35** (3500K), or **W40** (4000K), rated 90CRI.

Drivers are programmable constant current, 0–10V, 1% dimming, standard.

CUSTOM LUMEN OUTPUT REDUCTION

Factory-set custom reduced-lumen output driver configuration. Order **XL**. Specify lumens.

All drivers are remote mounted. Maximum remote driver distance is 100 ft., using 10AWG wire.

COLOR LEDs

Red, Blue or **SQ**—RGB flexible 5050 tapelights. Constant voltage drivers are 12V for single color, 24V for RGB sequencer. RGB sequencer requires **BDMXMOD** DMX 512 interface. Optional DMX wall box control offered separately (see Traxon, right.)

CANOPY

Mounts to J-box with mudring. Drivers and/or DMX interface are remote mounted.

cUL listed for dry locations.


REMOTE DRIVERS

Driver must be accessible after installation. For suspended and hard lid ceilings with access panels. Canopy mounts to mud ring attached to J-box, which must be attached to structure capable of supporting 75 lbs.

NOTE: Multiple drivers must be mounted no less than 4 inches apart side-by-side, and 1 inch apart end-to-end, to avoid overheating.

Standard pendant length: 8 ft. Specify **XP** for extra pendant. Maximum canopy to fixture distance: 25 ft. Maximum canopy to driver distance: 100 ft. (with 10 AWG wire).

Remote driver installation:



OPTIONS

DIMMING DRIVERS

D—standard supplied driver. Programmable, 0–10V, 120/277V, 50/60 Hz, 1% dimming.

OPTIONAL DRIVER

BDM-W11

- Lutron EcoSystem LDE14 Series
- Dims to 1%
- Fade to off.

RGB OPTIONS

BDMXMOD

- Osram part no. OTDMXRGB supplied.
- DMX control interface for RGB LED.
- Provides DMX control with protocols that meet USITT DMX-512A or DMX512 (DIN 56930-2). No converter is required. DMX controls by others.
- A second 4-conductor control cable to fixture canopy is supplied.

TRAXON LIGHT-DRIVE RGB (order separately)

BTRAXW—white controller

- Standalone, wall-mounted (12V power supply included) DMX controller for RGB LED that provides direct access to fixtures.
- Tune color and brightness with the Light-Drive wheel.
- Fully dimmable white mode button.
- See www.traxon-usa.com for details.