


Swing SLW6

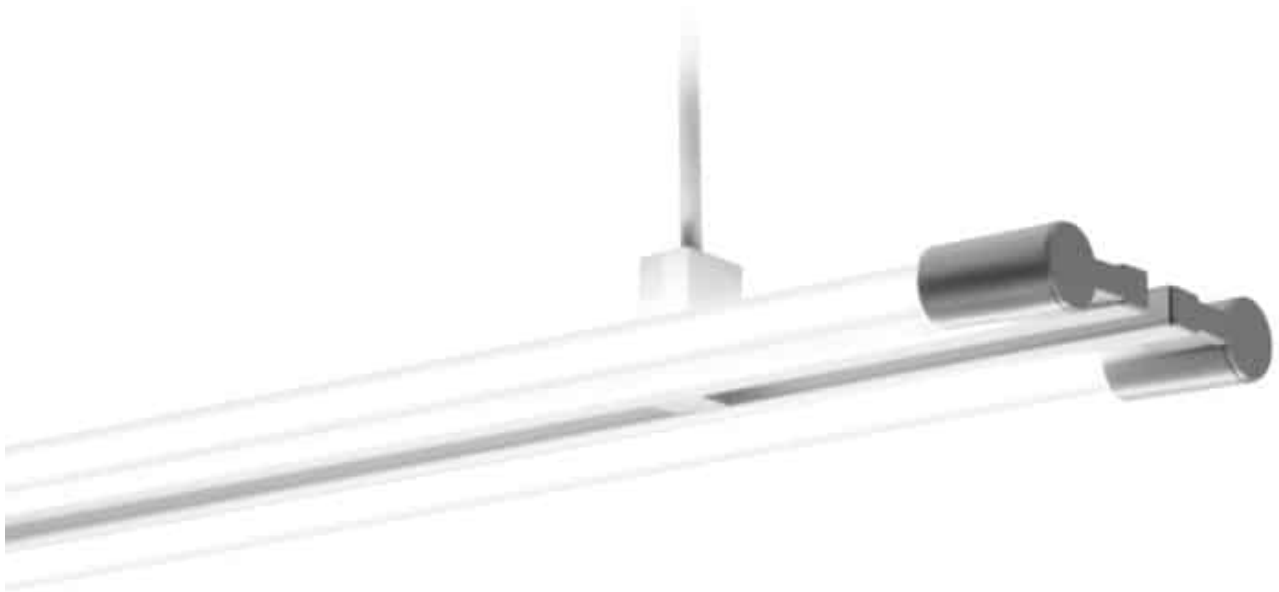

A modern LED strip light alternative to fluorescents, Swing SLW6 offers precise control with its 270° directional flexibility for customizable beam angles. Available in varied lengths and trim choices, these pendant fixtures offer versatility for personalized aesthetics.

CONSTRUCTION

- Double 2, 3, and 4 ft. pendant fixture that mounts to an extruded aluminum continuous wireway and driver housing Rail System.
- Designed for open ceiling environments, the Rail System may be mounted directly to ceilings, joists, or decks; replacing J-box and conduit, for a cleaner appearance. The back plate has a 7/8" opening for direct conduit power feed at the end caps, or anywhere along the Rail housing.
- 8 ft. gray adjustable power cord supplied, standard.
- Specify XP for additional power cord length (25 ft. max.).
- cUL listed for damp locations.

WHITE LEDs

W30 (3000K)

W35 (3500K)

W40 (4000K)

STANDARD DRIVER

D

OPTIONAL DRIVER

BDIM-W11