

YL4702

21 in. semi-recessed LED downlight



CONSTRUCTION

- Pre-coated galvanized steel mounting frame and J-box.
- Telescopic bar hangers supplied, which provide for off-center mount to joists or T-bar.
- Self flange type trim for clean, contemporary appearance.
- Ground wire included (pre-wired).
- .063 aluminum lampholder securely fastens to reflector.
- Hand blown glass shade with matte opal exterior, white interior.
- Standard drivers are constant current, universal voltage, with 0–10V dimming to 1%.
- cUL listed for damp locations only.


TYPE:	PROJECT:
ORDER NUMBER:	

MODEL# - LUMENS	LEDS	DIMMING	OPTIONS	VOLTAGE*
YL47021-2000	W30	D-Standard	EM-Emergency	120
YL47031-3000	W35	BDIM-W11	FS-Inline Fuse	277
YL47031	W40	DA-DALI		347
Example:				
YL47031	W35	D	EM	277

* Voltage must be specified.

YL47021 LED
22W, 2,000 lumens

YL47031 LED
33W, 3,000 lumens

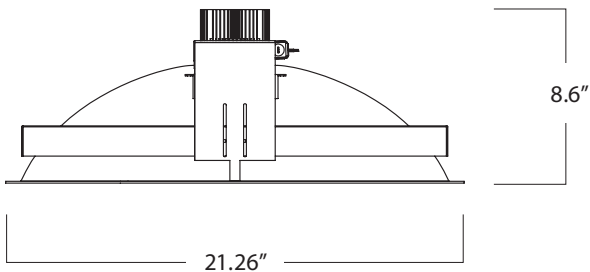

YL4702

21 in. semi-recessed LED downlight



WHITE LEDS

LED modules feature opal diffuser that provide the appearance on an A-lamp from below. 90 CRI. Specify color: **W30**–3000° Kelvin, **W35**–3500°, or **W40**–4000° Kelvin.

cUL rated for damp locations only.

DIMMING

- **D**—standard supplied driver. 0–10V, programmable, 1% dimming, 120/277V, 50/60 Hz.
- **BDIM-W11**—Lutron EcoSystem LED14 Series, 1% dimming, fade-to-off.
- **DA**—DALI, 1% dimming, fade-to-off. 120/277V, 50/60 Hz.

WATTS / LUMENS

MODEL	WATTS	DELIVERED LUMENS	CRI	R9
YL47021	22	2,000	92	72
YL47031	33	3,000	92	72

EMERGENCY

Emergency Battery Pack provides 10W for 90 mins. Red light and test switch mounts in ceiling, in single gang J-box.

Order **EM**.