

# Kone3 KLP31

small opal glass LED pendant



## CONSTRUCTION

- Canopy mounts to standard J-boxes, suspended from aircraft cables with pushbutton gliders.
- Die cast aluminum housing and heat sink.
- Opal glass outer shade with opal glass interior downlight.
- 6 ft. adjustable aircraft cable and power cord supplied, standard. Specify **XP** for additional length (25 ft. max.).

- Standard drivers are constant current, universal voltage, with 0-10V dimming to 1%. Housed in canopy for easy access.
- cUL listed for damp locations.


<b>TYPE:</b>	<b>PROJECT:</b>
<b>ORDER NUMBER:</b>	

MODEL#	LUMENS	HOUSING FINISH	LEDS	DIMMING	OPTIONS
<b>KLP31</b>	<b>2-2000</b> <b>3-3000</b>	<b>S-Silver</b> <b>W-White</b>	<b>W30</b> <b>W35</b> <b>W40</b>	<b>D-Standard</b> <b>D11</b> <b>DA-DALI</b>	<b>EM-Emergency</b>
Example:					
<b>KLP31</b>	<b>3</b>	<b>S</b>	<b>W35</b>	<b>D</b>	<b>EM</b>

<b>XP</b> -Extra power cord (in inches, 25 ft. max.)	
--	--

**KLP312** LED  
2,000 lumens

**KLP313** LED  
3,000 lumens

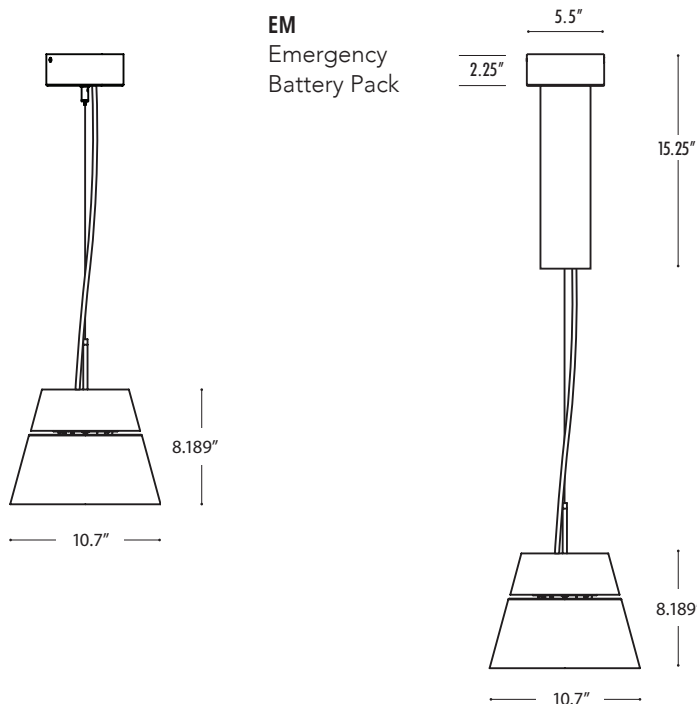

# Kone3 KLP31

small opal glass LED pendant



## WHITE LEDS

LED modules feature opal diffuser that provide the appearance on an A-lamp from below. 90 CRI. Specify color: **W30**–3000° Kelvin, **W35**–3500°, or **W40**–4000° Kelvin.

cUL rated for dry locations only.

## DIMMING


- **D**–standard supplied driver. 0–10V, programmable, 1% dimming, 120/277V, 50/60 Hz.
- **BDIM-W11**–Lutron EcoSystem LED14 Series, 1% dimming, fade-to-off.
- **DA**–DALI, 1% dimming, fade-to-off. 120/277V, 50/60 Hz.

## WATTS / LUMENS

MODEL	WATTS	DELIVERED LUMENS	CRI	R9
KLP312	22	2,000	92	72
KLP313	33	3,000	92	72

## EMERGENCY

Battery Pack provides 10W for 90 minutes. Canopy shown below. Order **EM**.

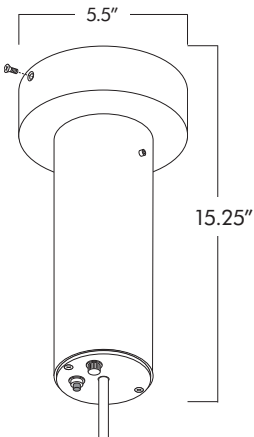

**NOTE:** Aircraft cable suspension is not recommended for outdoor use, where fixture will be exposed to water, or subject to wind oscillation. Avoid use near HVAC vents and in environments with corrosive chemical vapors, such as swimming pools.