


DELRAY
LIGHTING
INCORPORATED



DOS iO

IN/OUT

Dos iO



Delray's popular Dos line of direct/indirect circular LED fixtures is now offered in/out (iO). Comprised of an extruded aluminum outer housing, with inside and outside frosted acrylic lenses, these fixtures are available in 3, 4, 5 and 6 ft. diameters.

White LEDs are 90 CRI Nichia tight bin chips on aluminum clad boards, available in 3000, 3500 and 4000° color temperatures. Static color LED options include red and blue; or color-changing Nichia custom RGB boards with DMX interface. The inside and outside LEDs may be separate-switched, and may be ordered with one color inside and a different color outside.



Dos iO model nos.

UDCi03 – 3 ft., 8,270 delivered lumens

UDCi05 – 5 ft., 13,780 delivered lumens

UDCi04 – 4 ft., 10,750 delivered lumens



UDCi06 – 6 ft., 16,540 delivered lumens




Standard Canopy
10 x 2.25 in.




Remote Driver Canopy
3.8 x 0.45 in.

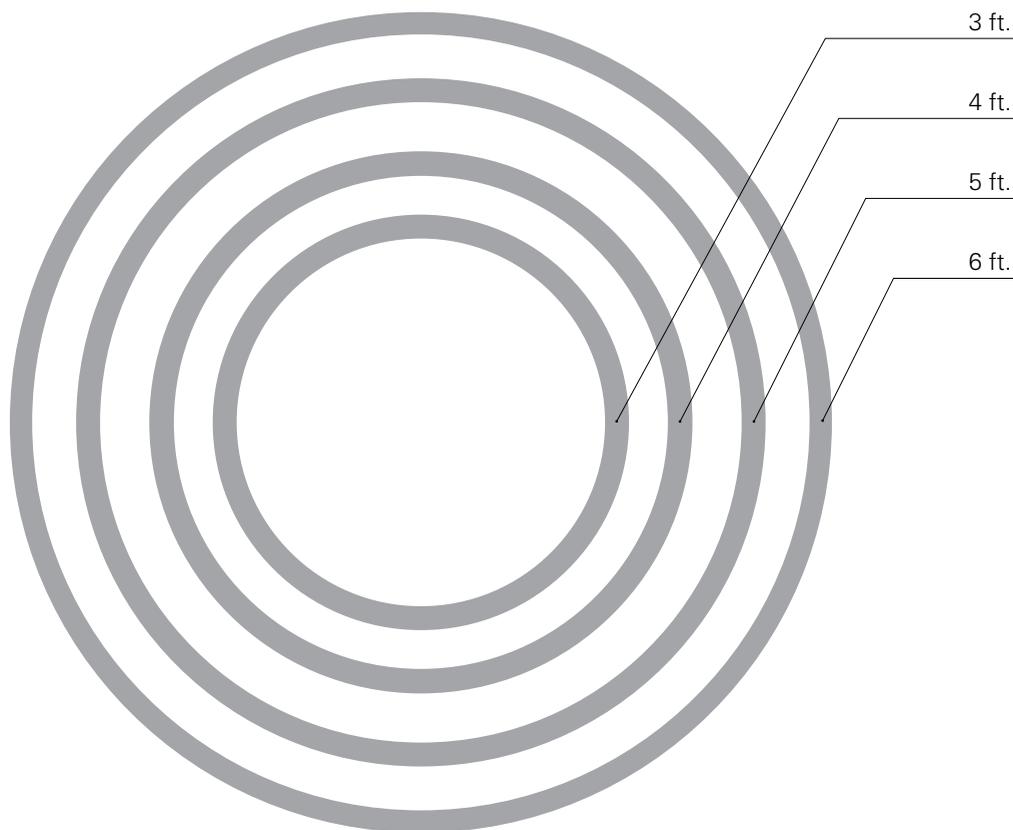

Dos iO Cross Section




S – Separate




SR – Separate Remote



CS – Central Standard



CR – Central Remote



NCR – Nexus Central Remote