



# Stick SLT6 trim 20


rail mount adjustable LED pendant with square direct/indirect louvered trim

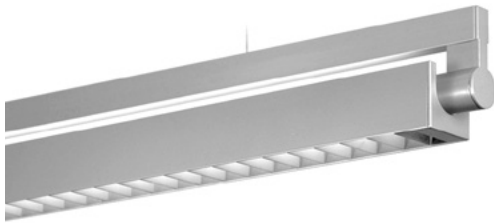

**TRIM 20**  
Direct/Indirect Square Trim With White Louvers

## CONSTRUCTION

- Single 2, 3, 4 ft. or dual lamp 6 or 8 ft. inline pendant fixture, which mounts to an extruded aluminum continuous wireway and driver housing Rail System.
- Designed for open ceiling environments, the Rail System may be mounted directly to ceilings, joists, or decks; replacing J-box and conduit, for a cleaner appearance. The back plate has a 7/8" opening for direct conduit power feed at the end caps, or from anywhere along the Rail housing.
- Rail System housing may also be suspended as a pendant. 8 ft. gray adjustable power and aircraft cables, with push button grippers supplied, standard.
- Specify XP for additional length (25 ft. max.).
- cUL listed for damp locations.



Lamp rotates 270°, in 15° stepped increments, to direct light where needed.


<b>TYPE:</b>	<b>PROJECT:</b>
<b>ORDER NUMBER:</b>	

MODEL#	LENGTH (FT.)	HO/LO	LEDS	FINISHES*	DIMMING	EMERGENCY	TRIM
SLT6- Stand-Alone	8	LO	W30	BW-Barn Wood	DC-Dark Cherry	D-Standard	20
SLTR6- Right	6	HO	W35	CB-Carbon Fiber	KL-Khaki Leather	BDIM-W11	
SLTM6- Middle	4		W40	ES-Espresso	BR-Bronze		
SLTL6- Left	3			HK-Honey Oak	GF-Gold Leaf		
	2			M-Maple	CO-Copper		
				SD-Silver Driftwood	GT-Gold Textured		
					SA-Stainless Steel		
Example:							
SLT4	8	HO	W35	BW	D		20

XP- Extra power cord (in inches, 25 ft. max.):	S100P - J-box cover
XL- custom lumen reduction (specify lumens):	*Trim only. For swatches, see p.3.


MODEL	LENGTH
SLT68LO/HO	8 ft.
SLT66LO/HO	6 ft.

\*Rail Parts ordered separately.

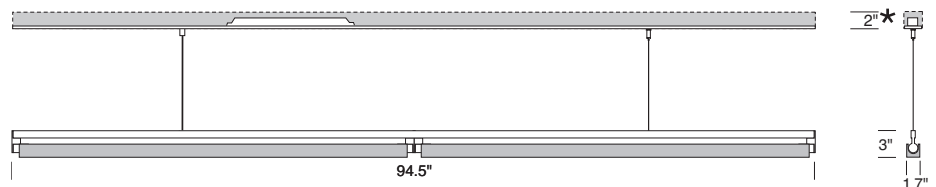

MODEL	LENGTH
SLT64LO/HO	4 ft.
SLT63LO/HO	3 ft.
SLT62LO/HO	2 ft.

\*Rail Parts ordered separately.

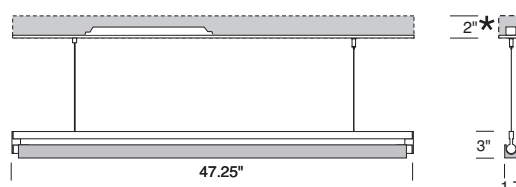

# Stick SLT6 trim 20

rail mount adjustable LED pendant with square direct/indirect louvered trim



## WHITE LEDS

Samsung tight bin chips on aluminum clad boards. 90 CRI.  
Specify color: W30–3000° Kelvin, W35–3500° Kelvin,  
or W40–4000° Kelvin color temperature.

## DIMMING

- **D**—standard supplied driver. 0–10V, programmable, 1% dimming, 120/277V, 50/60 Hz.
- **BDIM-W11**—Lutron EcoSystem LED14 Series, 1% dimming, fade-to-off.

## CUSTOM LUMEN OUTPUT REDUCTION

Factory set custom reduced-lumen output driver configuration.  
Order **XL**. Specify lumens.

## EMERGENCY

For 4' through 8' fixtures only. Battery pack provides 10W for 90 minutes. Adds additional length to driver housing.


## WATTS / LUMENS / EFFICACY

LENGTH	WATTS	DELIVERED LUMENS	EFFICACY
2 ft. <b>LO</b>	7	722	97 LPW
2 ft. <b>HO</b>	14	1,443	97 LPW
3 ft. <b>LO</b>	10.5	1,082	97 LPW
3 ft. <b>HO</b>	21	2,165	97 LPW
4 ft. <b>LO</b>	14	1,443	97 LPW
4 ft. <b>HO</b>	28	2,886	97 LPW

## AIRCRAFT CABLE

**NOTE:** Not recommended for outdoor use, where fixture will be exposed to water, or subject to wind oscillation. Avoid use near HVAC vents and in environments with corrosive chemical vapors, such as swimming pools.

## CONNECTING SECTIONS

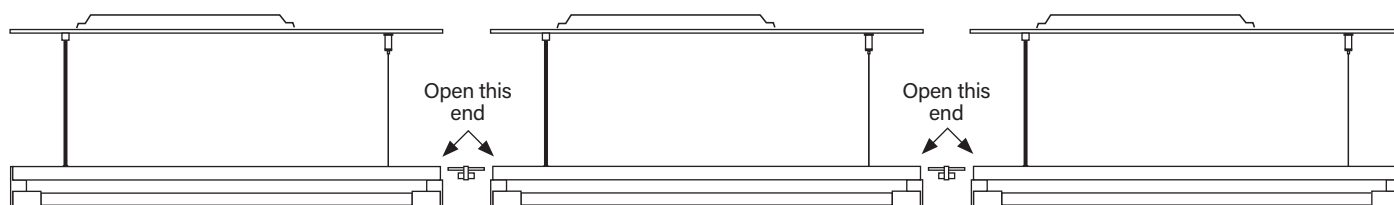

### RIGHT

SLTR open on right side of cord

	LENGTH
SLTR68LO/HO	8 ft.
SLTR66LO/HO	6 ft.
SLTR64LO/HO	4 ft.
SLTR63LO/HO	3 ft.
SLTR62LO/HO	2 ft.

### MIDDLE

SLTM open on both ends

	LENGTH
SLTM68LO/HO	8 ft.
SLTM66LO/HO	6 ft.
SLTM64LO/HO	4 ft.
SLTM63LO/HO	3 ft.
SLTM62LO/HO	2 ft.


### LEFT

SLTL open on left side of cord


	LENGTH
SLTL68LO/HO	8 ft.
SLTL66LO/HO	6 ft.
SLTL64LO/HO	4 ft.
SLTL63LO/HO	3 ft.
SLTL62LO/HO	2 ft.

## CONTINUOUS RUN CONNECTION

**STJR**—creates a mechanical connection for continuous runs. One connector is included with each two connecting fixtures.

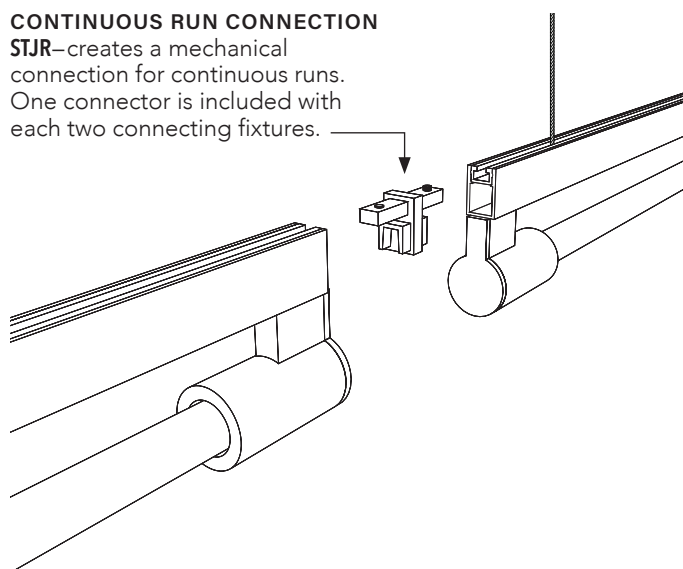

## RAIL SYSTEM

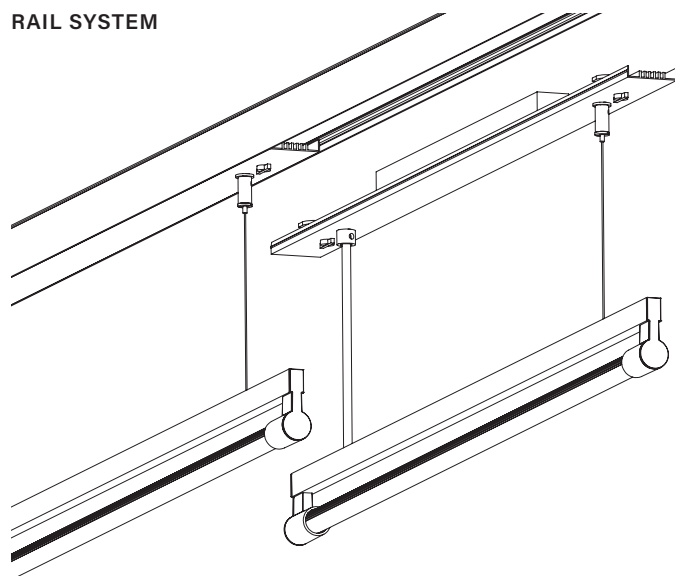


# Stick SLT6 trim 20


rail mount adjustable LED pendant with square direct/indirect louvered trim




## TEXTURED FINISHES



**BW**-Barnwood




**CB**-Carbon Fiber




**ES**-Espresso



**HK**-Honey Oak




**M**-Maple



**SD**-Silver Driftwood

## PREMIUM TEXTURED FINISHES




**DC**-Dark Cherry



**KL**-Khaki Leather

## METALLIC FINISHES



**BR**-Bronze



**GF**-Gold Leaf



**CO**-Copper



**GT**-Gold Textured



**SA**-Stainless Steel