


Stick SLT7 trim 09


adjustable LED single lamp surface mount with 180° perforated diffuser

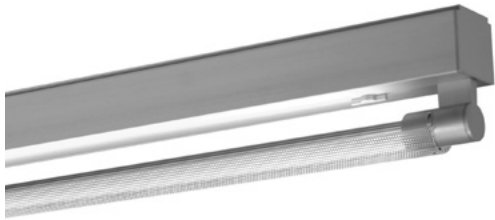

TRIM 09
180° Perforated Diffuser
with 360° Lamp Rotation

CONSTRUCTION

- Single 2, 3, 4 ft. or dual 6 or 8 ft. inline surface fixture that mounts to extruded aluminum continuous wireway and driver housing Rail System.
- Designed for open ceiling environments, the Rail System may be mounted directly to ceilings, joists, or decks; replacing J-box and conduit, for a cleaner appearance. The back plate has a 7/8" opening for direct conduit power feed at the end caps, or from anywhere along the Rail housing.
- Rail System housing may also be suspended as a pendant. 8 ft. gray adjustable power and aircraft cables, with push button grippers supplied, standard.
- Specify XP for additional length (25 ft. max.).
- cUL listed for damp locations.



Lamp rotates 270°, in 15° stepped increments, to direct light where needed.



| | |
|----------------------|-----------------|
| TYPE: | PROJECT: |
| ORDER NUMBER: | |

| MODEL# | LENGTH (FT.) | HO/LO | LEDS | DIMMING | EMERGENCY | OPTION | TRIM |
|----------|-----------------------|----------|-------------------|------------------------|--------------|-------------|------|
| SLT7 | 8 6 4 3 2 | LO HO | W30 W35 W40 | D-Standard BDIM-W11 | EM-Emergency | SAC SPF7 | 09 |
| Example: | | | | | | | |
| SLT7 | 8 | HO | W35 | BDIM-W11 | | SAC | 09 |

| | |
|---|---------------------------|
| Run Length (total feet): | S100P -J-box cover |
| XL-custom lumen reduction (specify lumens): | |


MODEL
SLT78LO/HO
SLT76LO/HO

LENGTH
8 ft.
6 ft.



MODEL
SLT74LO/HO
SLT73LO/HO
SLT72LO/HO

LENGTH
4 ft.
3 ft.
2 ft.



Stick SLT7 trim 09

adjustable LED single lamp surface mount with 180° perforated diffuser



WHITE LEDS

Samsung tight bin chips on aluminum clad boards. 90 CRI. Specify color: W30–3000° Kelvin, W35–3500° Kelvin, or W40–4000° Kelvin color temperature.

DIMMING

- **D**—standard supplied driver. 0–10V, programmable, 1% dimming, 120/277V, 50/60 Hz.
- **BDIM-W11**—Lutron EcoSystem LED14 Series, 1% dimming, fade-to-off.


EMERGENCY

For 4' through 8' fixtures only. Battery pack provides 10W for 90 minutes. Adds additional length to driver housing.

CUSTOM LUMEN OUTPUT REDUCTION


Factory set custom reduced-lumen output driver configuration. Order **XL**. Specify lumens.

MOUNT INFORMATION

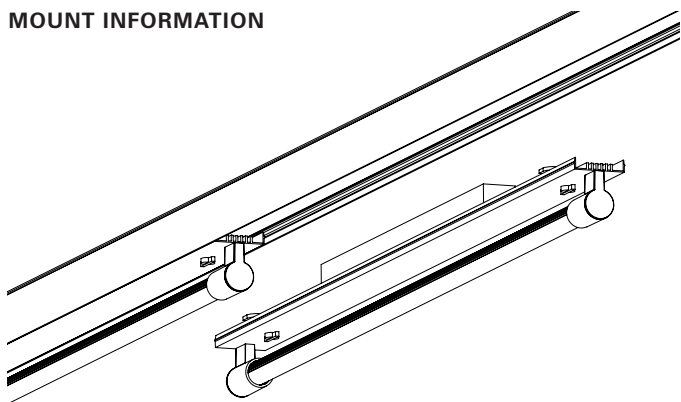

OPTIONAL J-BOX COVER

Cover plate mounts to maximum 4" square J-box. Ballast housing mounts to wall on top of cover plate, which may be painted to match ceiling or wall, and includes two mounting spacers to offset cover thickness. Order **S100P**.



WATTS / LUMENS / EFFICACY

| LENGTH | WATTS | DELIVERED LUMENS | EFFICACY |
|-----------------|-------|------------------|----------|
| 2 ft. LO | 7 | 722 | 97 LPW |
| 2 ft. HO | 14 | 1,443 | 97 LPW |
| 3 ft. LO | 10.5 | 1,082 | 97 LPW |
| 3 ft. HO | 21 | 2,165 | 97 LPW |
| 4 ft. LO | 14 | 1,443 | 97 LPW |
| 4 ft. HO | 28 | 2,886 | 97 LPW |

SUSPENSION & CONNECTION OPTIONS



SPF7—8 ft. 7-conductor cord (black, white, green, purple, gray, orange).

SAC—Standard 8' adjustable AC cable assembly.

AIRCRAFT CABLE

NOTE: Not recommended for outdoor use, where fixture will be exposed to water, or subject to wind oscillation. Avoid use near HVAC vents and in environments with corrosive chemical vapors, such as swimming pools.