



# Stick SLT7 trim 20


adjustable LED single lamp surface mount, square trim with white louvers

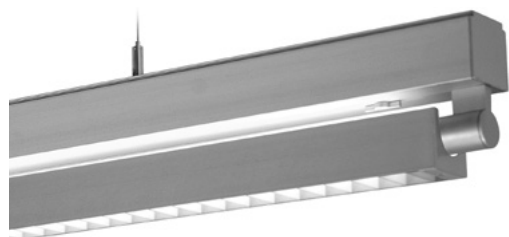

**TRIM 20**  
Direct/Indirect Square Trim  
With White Louvers

## CONSTRUCTION

- Single 2, 3, 4 ft. or dual 6 or 8 ft. inline surface fixture that mounts to extruded aluminum continuous wireway and driver housing Rail System.
- Designed for open ceiling environments, the Rail System may be mounted directly to ceilings, joists, or decks; replacing J-box and conduit, for a cleaner appearance. The back plate has a 7/8" opening for direct conduit power feed at the end caps, or from anywhere along the Rail housing.
- Rail System housing may also be suspended as a pendant. 8 ft. gray adjustable power and aircraft cables, with push button grippers supplied, standard.
- Specify XP for additional length (25 ft. max.).
- cUL listed for damp locations.



Lamp rotates 270°, in 15° stepped increments, to direct light where needed.


TYPE:	PROJECT:
ORDER NUMBER:	

MODEL#	LENGTH (FT.)	HO/LO	LEDS	FINISHES*	DIMMING	EMERGENCY	OPTION	TRIM
SLT7	8 6 4 3 2	LO HO	W30 W35 W40	BW-Barn Wood CB-Carbon Fiber ES-Espresso HK-Honey Oak M-Maple SD-Silver Driftwood DC-Dark Cherry KL-Khaki Leather BR-Bronze GF-Gold Leaf CO-Copper GT-Gold Textured SA-Stainless Steel	D-Standard BDIM-W11	EM	SAC SPF7	20
Example:								
SLT7	8	HO	W35	BW	D		SAC	20

XP- Extra power cord (in inches, 25 ft. max.):		S100P - J-box cover	
XL- custom lumen reduction (specify lumens):		*Trim only. For switches, see p.3.	


MODEL  
SLT78LO/HO  
SLT76LO/HO

LENGTH  
8 ft.  
6 ft.



MODEL  
SLT74LO/HO  
SLT73LO/HO  
SLT72LO/HO

LENGTH  
4 ft.  
3 ft.  
2 ft.



# Stick SLT7 trim 20

adjustable LED single lamp surface mount, square trim with white louvers



## WHITE LEDS

Samsung tight bin chips on aluminum clad boards. 90 CRI. Specify color: W30–3000° Kelvin, W35–3500° Kelvin, or W40–4000° Kelvin color temperature.

## DIMMING

- **D**—standard supplied driver. 0–10V, programmable, 1% dimming, 120/277V, 50/60 Hz.
- **BDIM-W11**—Lutron EcoSystem LED14 Series, 1% dimming, fade-to-off.


## EMERGENCY

For 4' through 8' fixtures only. Battery pack provides 10W for 90 minutes. Adds additional length to driver housing.

## CUSTOM LUMEN OUTPUT REDUCTION


Factory set custom reduced-lumen output driver configuration. Order **XL**. Specify lumens.

## MOUNT INFORMATION

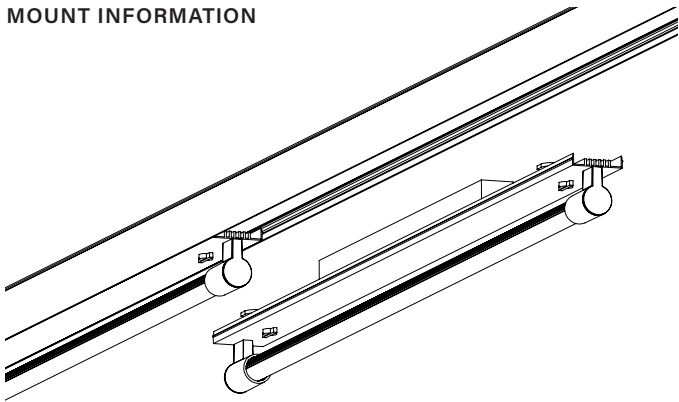

## OPTIONAL J-BOX COVER

Cover plate mounts to maximum 4" square J-box. Ballast housing mounts to wall on top of cover plate, which may be painted to match ceiling or wall, and includes two mounting spacers to offset cover thickness. Order **S100P**.



## WATTS / LUMENS / EFFICACY

LENGTH	WATTS	DELIVERED LUMENS	EFFICACY
2 ft. <b>LO</b>	7	722	97 LPW
2 ft. <b>HO</b>	14	1,443	97 LPW
3 ft. <b>LO</b>	10.5	1,082	97 LPW
3 ft. <b>HO</b>	21	2,165	97 LPW
4 ft. <b>LO</b>	14	1,443	97 LPW
4 ft. <b>HO</b>	28	2,886	97 LPW

## SUSPENSION & CONNECTION OPTIONS



**SPF7**—8 ft. 7-conductor cord (black, white, green, purple, gray, orange).

**SAC**—Standard 8' adjustable AC cable assembly.

## AIRCRAFT CABLE


**NOTE:** Not recommended for outdoor use, where fixture will be exposed to water, or subject to wind oscillation. Avoid use near HVAC vents and in environments with corrosive chemical vapors, such as swimming pools.

# Stick SLT7 trim 20


adjustable LED single lamp surface mount, square trim with white louvers



## TEXTURED FINISHES



**BW**-Barnwood




**CB**-Carbon Fiber




**ES**-Espresso



**HK**-Honey Oak




**M**-Maple



**SD**-Silver Driftwood

## PREMIUM TEXTURED FINISHES




**DC**-Dark Cherry



**KL**-Khaki Leather

## METALLIC FINISHES



**BR**-Bronze



**GF**-Gold Leaf



**CO**-Copper



**GT**-Gold Textured



**SA**-Stainless Steel