


SWING SLW5

Standard LED Surface Installation Installation ou de montage

WARNING: disconnect main power at the source prior to installation!


Only qualified electricians should install Delray Lighting products.

- 1 Attach 1/2" conduit to back plate with threaded connector (by others).
- 2 Remove both sides of the driver cover and driver from back plate. Attach fixture to drywall using enclosed screws and re-attach driver.
- 3 Connect power to driver and ground cage clamp connectors provided. Use up to 14AWG wire, maximum.

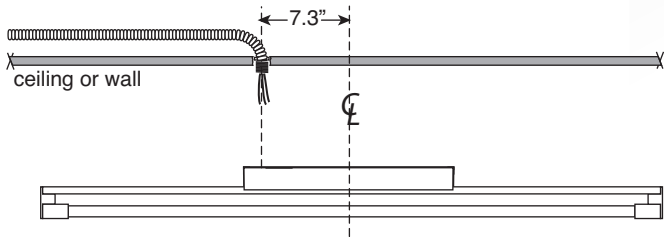

Note: Power Does Not Enter At Center

Optional Box Mount using part no. SW200
J-box mount to 3" mud ring

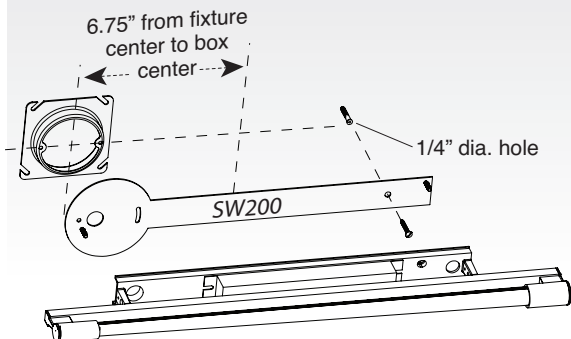

Note: align mud ring holes with fixture orientation.

