


Swing SLW5 trim 09

adjustable LED single lamp surface mount with 180° perforated diffuser

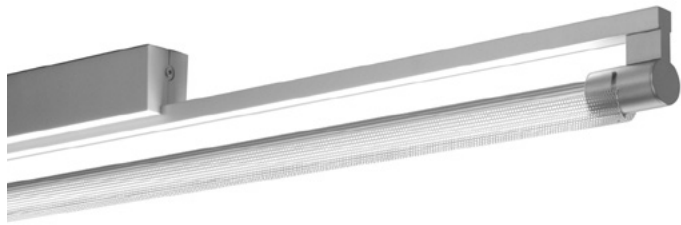

CONSTRUCTION

- Single 2, 3, 4 ft. stand-alone, surface mount fixture. Each fixture requires its own power feed.
- Zinc aluminum alloy and aluminum extrusion, with matte anodized finish.
- Back plate has 7/8 in. opening for direct conduit feed. Not intended for J-box mount.
- cUL listed for damp locations.



TRIM 09

180° Perforated Diffuser
with 360° Lamp Rotation

TYPE:	PROJECT:
ORDER NUMBER:	

MODEL#	LENGTH (FT.)	HO/LO	LEDS	DIMMING	EMERGENCY	OPTION	TRIM
SLW5	4	LO	W30	D-Standard BDIM-W11	EM-Emergency	SW200S SW200W	09
	3	HO	W35				
	2		W40				



Example:

SLW5	4	HO	W35	D		SW200S	09
------	---	----	-----	---	--	--------	----

XL-custom lumen reduction (specify lumens):	
---	--

MODEL
SLW54LO/HO
SLW53LO/HO
SLW52LO/HO

LENGTH
4 ft.
3 ft.
2 ft.



Lamp rotates 270°,
in 15° stepped increments,
to direct light where needed.

Swing SLW5 trim 09

adjustable LED single lamp surface mount with 180° perforated diffuser



WHITE LEDS

Samsung tight bin chips on aluminum clad boards. 90 CRI. Specify color: W30–3000° Kelvin, W35–3500° Kelvin, or W40–4000° Kelvin color temperature.

DIMMING

- **D**—standard supplied driver. 0–10V, programmable, 1% dimming, 120/277V, 50/60 Hz.
- **BDIM-W11**—Lutron EcoSystem LED14 Series, 1% dimming, fade-to-off.

CUSTOM LUMEN OUTPUT REDUCTION


Factory set custom reduced-lumen output driver configuration. Order **XL**. Specify lumens.

EMERGENCY

For 4' through 8' fixtures only. Battery pack provides 10W for 90 minutes. Adds additional length to driver housing.

MOUNT INFO

Swing features a die cast backplate with a threaded 1/2" conduit fitting at one end for direct connection to flexible conduit, which provides the smallest ballast compartment profile, and avoids unsightly plates or covers on walls or ceilings. Use a third party 1/2" conduit fitting and maximum 14 AWG wire for communication to the ballast. Detailed installation instructions are available at delraylighting.com.

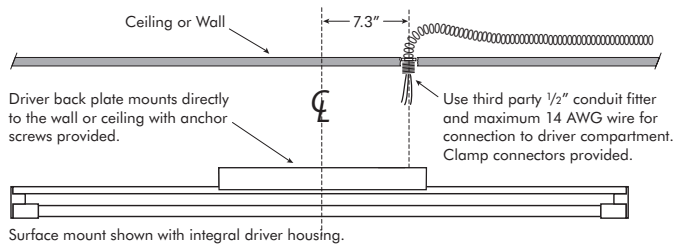

NOTE: POWER DOES NOT ENTER AT THE CENTER

WATTS / LUMENS / EFFICACY

LENGTH	WATTS	DELIVERED LUMENS	EFFICACY
2 ft. LO	7	722	97 LPW
2 ft. HO	14	1,443	97 LPW
3 ft. LO	10.5	1,082	97 LPW
3 ft. HO	21	2,165	97 LPW
4 ft. LO	14	1,443	97 LPW
4 ft. HO	28	2,886	97 LPW

J-BOX MOUNT

SW5 fixture with standard driver housing requires a 3 in. mud ring to mount to standard J-box; the holes in line with the direction of the fixture. Order **SW200**, available in **S**—silver or **W**—white.

