


# Swing SLW6 trim 09


rail mount adjustable LED double lamp pendant, 180° perforated diffuser

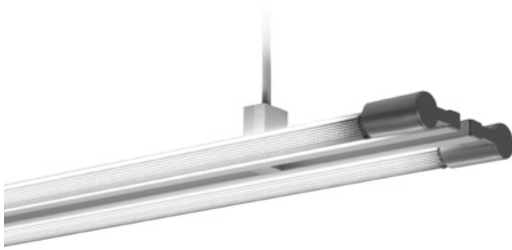

**TRIM 09**  
180° Perforated Diffuser with 360° Lamp Rotation

### CONSTRUCTION

- o Double 2, 3, 4 ft. pendant fixture that mounts to an extruded aluminum continuous wireway and driver housing Rail System.
- o Designed for open ceiling environments, the Rail System may be mounted directly to ceilings, joists, or decks; replacing J-box and conduit, for a cleaner appearance. The back plate has a 7/8" opening for direct conduit power feed at the end caps, or from anywhere along the Rail housing.
- o 8 ft. gray adjustable power cord supplied, standard.
- o Specify XP for additional power cord length (25 ft. max.).
- o cUL listed for damp locations.



Lamp rotates 270°, in 15° stepped increments, to direct light where needed.


|                      |                 |
|----------------------|-----------------|
| <b>TYPE:</b>         | <b>PROJECT:</b> |
| <b>ORDER NUMBER:</b> |                 |

| MODEL#   | LENGTH (FT.) | HO/LO    | LEDS              | DIMMING                | EMERGENCY    | OPTION       | TRIM |
|----------|--------------|----------|-------------------|------------------------|--------------|--------------|------|
| SLW6     | 4<br>3<br>2  | LO<br>HO | W30<br>W35<br>W40 | D-Standard<br>BDIM-W11 | EM-Emergency | SDC<br>S100P | 09   |
| Example: |              |          |                   |                        |              |              |      |
| SLW6     | 4            | HO       | W35               | D                      |              | SDC          | 09   |

|  |  |
|--|--|
| <b>XP</b> - Extra power cord (in inches, 25 ft. max.): | <b>XL</b> - custom lumen reduction (specify lumens): |
| Run Length (total feet):                               |  |

| MODEL      | LENGTH |
|------------|--------|
| SLW64LO/HO | 4 ft.  |
| SLW63LO/HO | 3 ft.  |
| SLW62LO/HO | 2 ft.  |

**NOTE:** Rail Parts ordered separately.

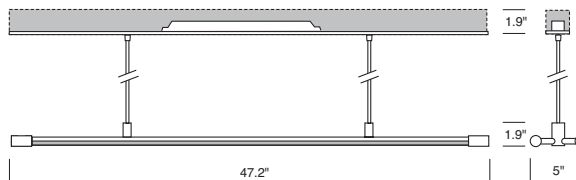

# Swing SLW6 trim 09

rail mount adjustable LED double lamp pendant, 180° perforated diffuser



## WHITE LEDS

Samsung tight bin chips on aluminum clad boards. 90 CRI. Specify color: W30–3000° Kelvin, W35–3500° Kelvin, or W40–4000° Kelvin color temperature.

## DIMMING

- **D**—standard supplied driver. 0–10V, programmable, 1% dimming, 120/277V, 50/60 Hz.
- **BDIM-W11**—Lutron EcoSystem LED14 Series, 1% dimming, fade-to-off.


## EMERGENCY

For 4' through 8' fixtures only. Battery pack provides 10W for 90 minutes. Adds additional length to driver housing.

## CUSTOM LUMEN OUTPUT REDUCTION


Factory set custom reduced-lumen output driver configuration. Order **XL**. Specify lumens.

## RAIL SYSTEM

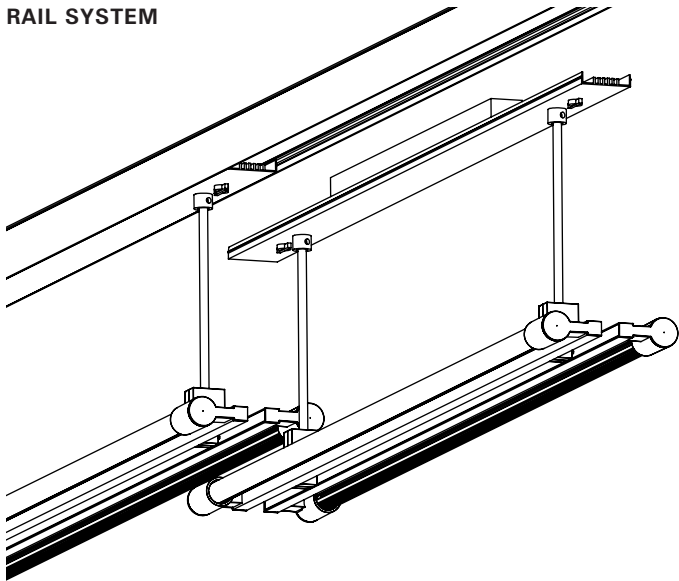

## OPTIONAL J-BOX COVER

Cover plate mounts to maximum 4" square J-box. Ballast housing mounts to wall on top of cover plate, which may be painted to match ceiling or wall, and includes two mounting spacers to offset cover thickness. Order **S100P**.



## WATTS / LUMENS / EFFICACY

| LENGTH          | WATTS | DELIVERED LUMENS | EFFICACY |
|-----------------|-------|------------------|----------|
| 2 ft. <b>LO</b> | 14    | 1,444            | 103 LPW  |
| 2 ft. <b>HO</b> | 28    | 2,886            | 103 LPW  |
| 3 ft. <b>LO</b> | 21    | 2,164            | 103 LPW  |
| 3 ft. <b>HO</b> | 42    | 4,330            | 103 LPW  |
| 4 ft. <b>LO</b> | 28    | 2,886            | 103 LPW  |
| 4 ft. <b>HO</b> | 56    | 5,772            | 103 LPW  |

## CONTINUOUS RUN CONNECTION

For two or more pendant fixtures mounted end to end, order and install **SDC** swing double connector to align fixtures and prevent inter-fixture collision.

