


Swing SLW7 trim 18


adjustable LED double lamp surface mount, fully perforated white reflector



TRIM 18
Fully Perforated
White Reflector
with Acrylic Backing

CONSTRUCTION

- o Double 2, 3, 4 ft. surface fixture that mounts to extruded aluminum continuous wireway and driver housing Rail System.
- o Designed for open ceiling environments, the Rail System may be mounted directly to ceilings, joists, or decks; replacing J-box and conduit, for a cleaner appearance. The back plate has a 7/8" opening for direct conduit power feed at the end caps, or from anywhere along the Rail housing.
- o Rail system may also be suspended. See **SPF7, SAC** option on p. 2.
- o Specify XP for additional length (25 ft. max.).
- o cUL listed for damp locations.




Lamp rotates 270°, in 15° stepped increments, to direct light where needed.

| | |
|----------------------|-----------------|
| TYPE: | PROJECT: |
| ORDER NUMBER: | |

| MODEL# | LENGTH (FT.) | LEDS | HO/LO* | DIMMING | EMERGENCY | OPTIONS |
|----------|--------------|-------------------|----------|------------------------|--------------|-------------|
| SLW7 | 4 3 2 | W30 W35 W40 | LO HO | D-Standard BDIM-W11 | EM-Emergency | SPF7 SAC |
| Example: | | | | | | |
| SLW7 | 4 | W35 | HO | D | | |

| | | | |
|---|--|-------------------|--|
| Run Length (total feet): | | S100P-J-box cover | |
| XL-custom lumen reduction (specify lumens): | | | |

| | |
|--------------|---------------|
| MODEL | LENGTH |
| SLW74LO/HO | 4 ft. |
| SLW73LO/HO | 3 ft. |
| SLW72LO/HO | 2 ft. |



Swing SLW7 trim 18

adjustable LED double lamp surface mount, fully perforated white reflector



WHITE LEDS

Samsung tight bin chips on aluminum clad boards. 90 CRI. Specify color: **W30**–3000°, **W35**–3500°, or **W40**–4000° Kelvin color temperature.

DIMMING

- **D**—standard supplied driver. 0–10V, programmable, 1% dimming, 120/277V, 50/60 Hz.
- **BDIM-W11**—Lutron EcoSystem LED14 Series, 1% dimming, fade-to-off.


CUSTOM LUMEN OUTPUT REDUCTION

Factory set custom reduced-lumen output driver configuration. Order **XL**. Specify lumens.

EMERGENCY

For 4' through 8' fixtures only. Battery pack provides 10W for 90 minutes. Adds additional length to driver housing.

RAIL SYSTEM

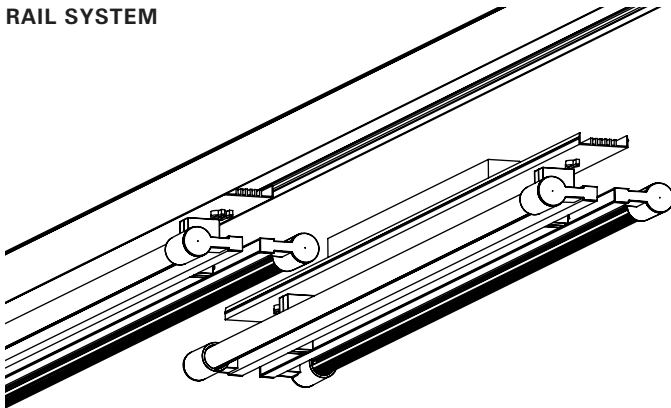

WATTS / LUMENS / EFFICACY

| LENGTH | WATTS | DELIVERED LUMENS | EFFICACY |
|-----------------|-------|------------------|----------|
| 2 ft. LO | 14 | 1,444 | 103 LPW |
| 2 ft. HO | 28 | 2,886 | 103 LPW |
| 3 ft. LO | 21 | 2,164 | 103 LPW |
| 3 ft. HO | 42 | 4,330 | 103 LPW |
| 4 ft. LO | 28 | 2,886 | 103 LPW |
| 4 ft. HO | 56 | 5,772 | 103 LPW |

SUSPENSION & CONNECTION OPTIONS



SPF7—8 ft. 7-conductor cord (black, white, green, purple, gray, orange).

SAC—Standard 8' adjustable aircraft cable assembly.

OPTIONAL J-BOX COVER

Cover plate mounts to maximum 4" square J-box. Ballast housing mounts to wall on top of cover plate, which may be painted to match ceiling or wall, and includes two mounting spacers to offset cover thickness. Order **S100P**.

