


Swing SLW7 trim 20


adjustable LED double lamp surface mount, square trim, white louvers



TRIM 20
Direct/Indirect Square Trim
with White Louvers

CONSTRUCTION

- Double 2, 3, 4 ft. surface fixture that mounts to extruded aluminum continuous wireway and driver housing Rail System.
- Designed for open ceiling environments, the Rail System may be mounted directly to ceilings, joists, or decks; replacing J-box and conduit, for a cleaner appearance. The back plate has a 7/8" opening for direct conduit power feed at the end caps, or from anywhere along the Rail housing.
- Rail system may also be suspended. See **SPF7, SAC** option on p. 2.
- Specify XP for additional length (25 ft. max.).
- cUL listed for damp locations.



Lamp rotates 270°, in 15° stepped increments, to direct light where needed.


TYPE:	PROJECT:
ORDER NUMBER:	

MODEL#	LENGTH (FT.)	HO/LO	LEDS	FINISHES*		DIMMING	EMERGENCY	OPTION	TRIM
SLW7	4	LO	W30	BW-Barn Wood	DC-Dark Cherry	D-Standard BDIM-W11	EM	SPF7 SAC	20
	3	HO	W35	CB-Carbon Fiber	KL-Khaki Leather				
	2		W40	ES-Espresso	BR-Bronze				
				HK-Honey Oak	GF-Gold Leaf				
				M-Maple	CO-Copper				
				SD-Silver Driftwood	GT-Gold Textured				
					SA-Stainless Steel				
Example:									
SLW7	4	HO	W35	BW		D		SAC	20

Run Length (total feet):		S100P-J-box cover	
XL-custom lumen reduction (specify lumens):		*Trim only. For swatches, see p.3.	

MODEL
SLW74LO/HO
SLW73LO/HO
SLW72LO/HO

LENGTH
4 ft.
3 ft.
2 ft.



Swing SLW7 trim 20

adjustable LED double lamp surface mount, square trim, white louvers



WHITE LEDS

Samsung tight bin chips on aluminum clad boards. 90 CRI. Specify color: **W30**–3000°, **W35**–3500°, or **W40**–4000° Kelvin color temperature.

DIMMING

- **D**—standard supplied driver. 0–10V, programmable, 1% dimming, 120/277V, 50/60 Hz.
- **BDIM-W11**—Lutron EcoSystem LED14 Series, 1% dimming, fade-to-off.


CUSTOM LUMEN OUTPUT REDUCTION

Factory set custom reduced-lumen output driver configuration. Order **XL**. Specify lumens.

EMERGENCY


For 4' through 8' fixtures only. Battery pack provides 10W for 90 minutes. Adds additional length to driver housing.

RAIL SYSTEM

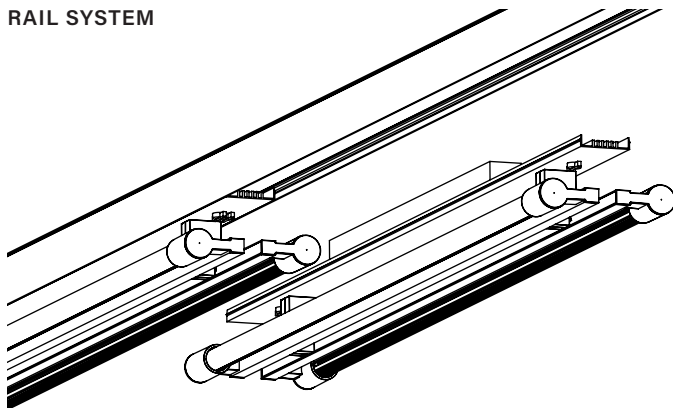

OPTIONAL J-BOX COVER

Cover plate mounts to maximum 4" square J-box. Ballast housing mounts to wall on top of cover plate, which may be painted to match ceiling or wall, and includes two mounting spacers to offset cover thickness. Order **S100P**.



WATTS / LUMENS / EFFICACY

LENGTH	WATTS	DELIVERED LUMENS	EFFICACY
2 ft. LO	14	1,444	103 LPW
2 ft. HO	28	2,886	103 LPW
3 ft. LO	21	2,164	103 LPW
3 ft. HO	42	4,330	103 LPW
4 ft. LO	28	2,886	103 LPW
4 ft. HO	56	5,772	103 LPW

SUSPENSION & CONNECTION OPTIONS



SPF7—8 ft. 7-conductor cord (black, white, green, purple, gray, orange).


SAC—Standard 8' adjustable aircraft cable assembly.

Swing SLW7 trim 20


adjustable LED double lamp surface mount, square trim, white louvers



TEXTURED FINISHES



BW-Barnwood




CB-Carbon Fiber




ES-Espresso



HK-Honey Oak




M-Maple



SD-Silver Driftwood

PREMIUM TEXTURED FINISHES




DC-Dark Cherry



KL-Khaki Leather

METALLIC FINISHES



BR-Bronze



GF-Gold Leaf



CO-Copper



GT-Gold Textured



SA-Stainless Steel