


**WARNING:** disconnect main power at the source prior to installation!

Only qualified electricians should install Delray Lighting products.

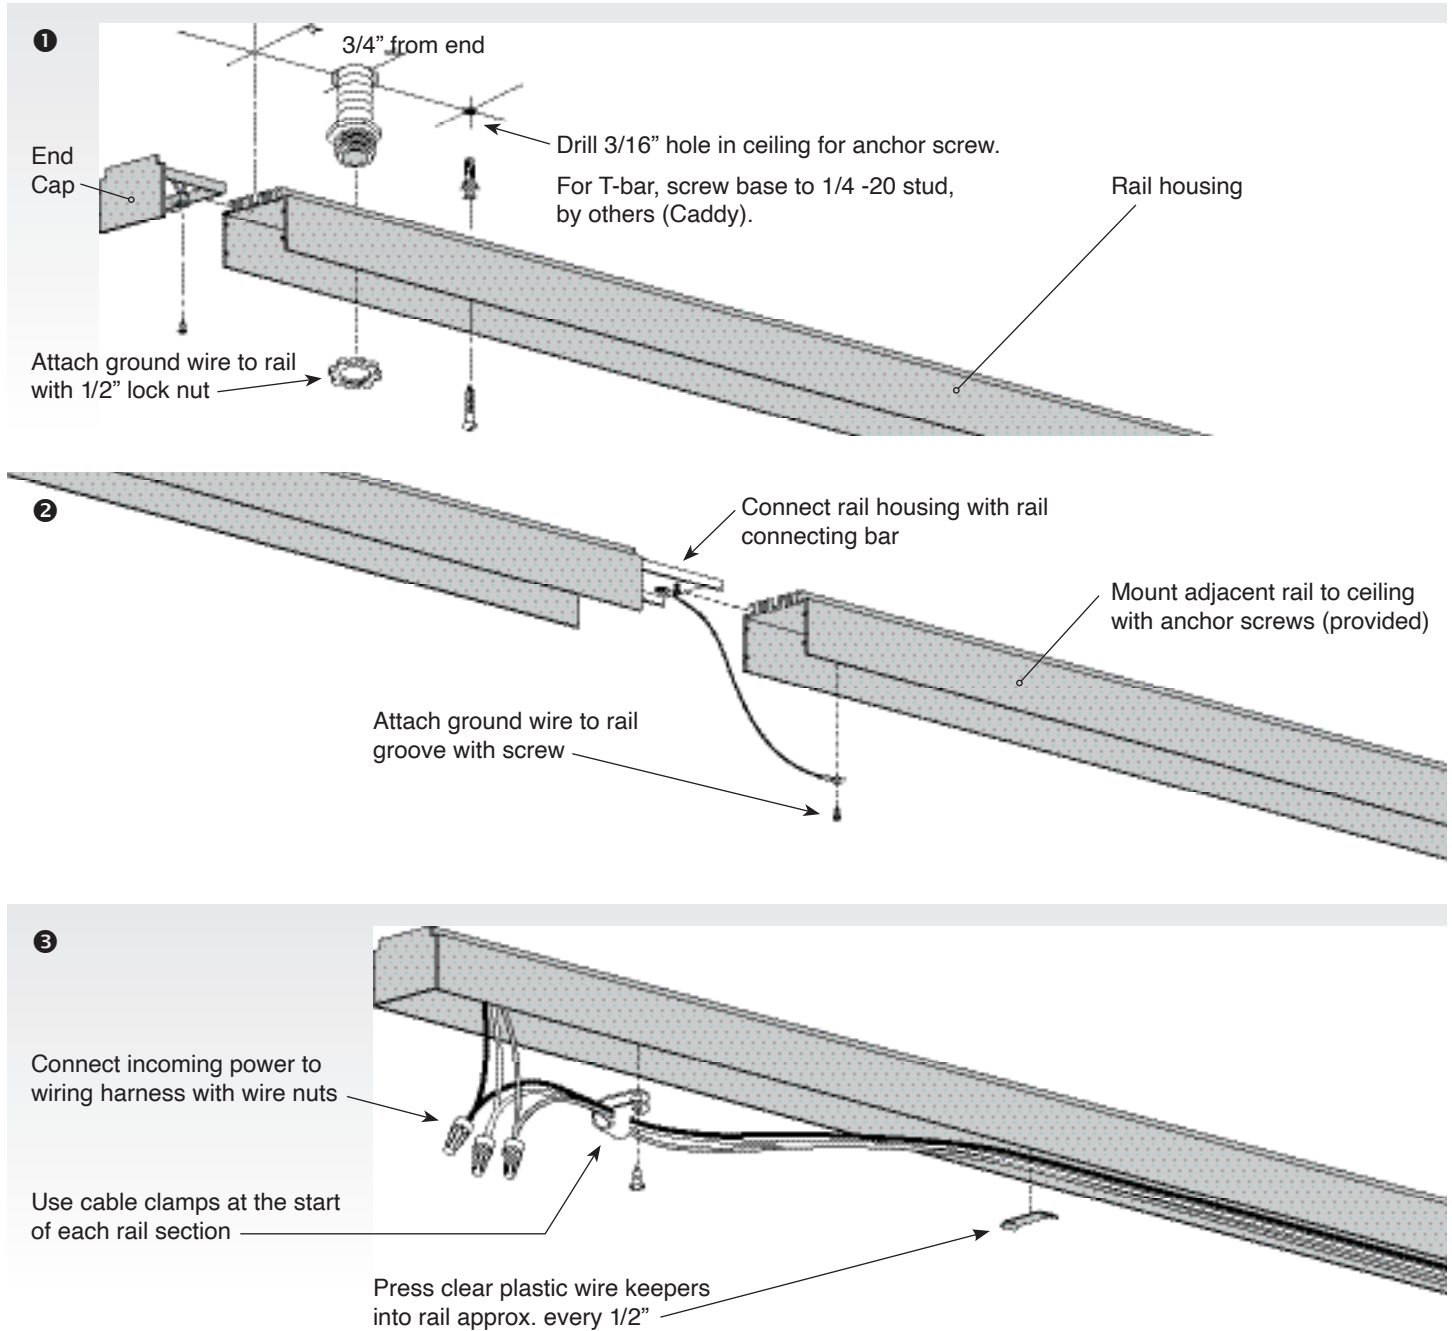

4

Attach ballast wires to wiring harness at push-in connectors

Connect ground wire from rail to push-in ground terminal

5

Carefully insert wires into rail

Push fixture ballast plate into rail, being certain that wires are not pinched. Latch shown in open position.


6

Connect ground wire from gap cover to rail section with screw

Lock fixture into place by turning latch clockwise

Join SW6/SW7 double lamp fixtures with the SCD double connector.

Insert gap cover adjacent to fixture and continue to next section



### Suspension of Swing Rail System From Aircraft Cable

Begin run by locating rail housing marked power feed. Follow steps 1A, 2A and 3 through 6.

