

# Aspect AL2347

metal LED pendant with glass shade



## CONSTRUCTION

- Canopy mounts to standard J-box.
- Die cast aluminum housing and heat sink.
- Hand blown glass or white acrylic shade. (See Glass Color, below.)
- 6 ft. power cord supplied, standard. Specify **XP** for additional length (25 ft. max.).
- Drivers housed inside canopy for easy access.
- cUL listed for damp locations.

<b>TYPE:</b>	<b>PROJECT:</b>
<b>ORDER NUMBER:</b>	

MODEL#	HOUSING FINISH	GLASS COLOR	LEDS	DIMMING	OPTIONS
<b>AL2347</b>	<b>H</b> -Hammerstone <b>S</b> -Silver <b>W</b> -White <b>CC</b> -Custom RAL color	<b>I</b> -Indigo <b>M</b> -Marine <b>O</b> -Opal <b>T</b> -Tangerine <b>OA</b> -White Acrylic	<b>W30</b> <b>W35</b> <b>W40</b>	<b>D</b> -Standard <b>BDIM-W11</b> <b>DA</b> -DALI	<b>EM</b> -Emergency


Example:

<b>AL2347</b>	<b>S</b>	<b>O</b>	<b>W35</b>	<b>BDIM-W11</b>	
---------------	----------	----------	------------	-----------------	--


<b>XP</b> -Extra power cord (in inches, 25 ft. max.):		<b>*CC</b> -Custom RAL color:	
---	--	-------------------------------	--

\*RAL color must be specified: [Tiger Drylac](#)

**AL2347**  
21 watts  
2,125 delivered lumens

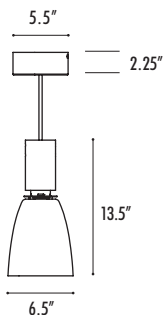

**EM**  
Emergency

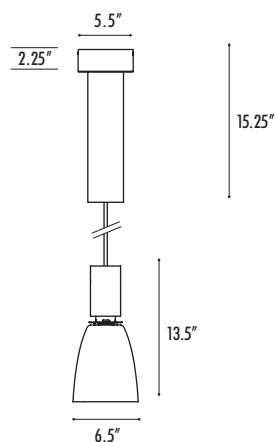

# Aspect AL2347

metal LED pendant with glass shade



## WHITE LEDS

Bridgelux Vero 18 COB.. 90 CRI. Specify color:  
**W30**–3000°, **W35**–3500° or **W40**–4000° Kelvin.

## DIMMING

- **D**–standard supplied driver. 0–10V, programmable, 1% dimming, 120/277V, 50/60 Hz.
- **BDIM-W11**–Lutron EcoSystem LED14 Series, 1% dimming, fade-to-off.
- **DA**–DALI, 1% dimming, fade-to-off. 120/277V, 50/60 Hz.

## WATTS / LUMENS

WATTS	DELIVERED LUMENS	CRI	R9
21	2,125	90	50

## EMERGENCY

Battery Pack provides 10W for 90 minutes. Canopy shown below. Order **EM**.

