

Aspect AL2347

metal LED pendant with glass shade



CONSTRUCTION

- Canopy mounts to standard J-box.
- Die cast aluminum housing and heat sink.
- Hand blown glass or white acrylic shade. (See Glass Color, below.)
- 6 ft. power cord supplied, standard. Specify **XP** for additional length (25 ft. max.).
- Drivers housed inside canopy for easy access.
- cUL listed for damp locations.

TYPE:	PROJECT:
ORDER NUMBER:	

MODEL#	HOUSING FINISH	GLASS COLOR	LEDS	DIMMING	OPTIONS
AL2347	H -Hammerstone S -Silver W -White CC -Custom RAL color	I -Indigo M -Marine O -Opal T -Tangerine OA -White Acrylic	W30 W35 W40	D -Standard BDIM-W11 DA -DALI	EM -Emergency


Example:

AL2347	S	O	W35	BDIM-W11	
---------------	----------	----------	------------	-----------------	--


XP -Extra power cord (in inches, 25 ft. max.):		*CC -Custom RAL color:	
---	--	-------------------------------	--

*RAL color must be specified: [Tiger Drylac](#)

AL2347
21 watts
2,125 delivered lumens

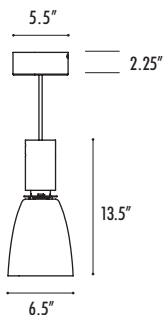

EM
Emergency

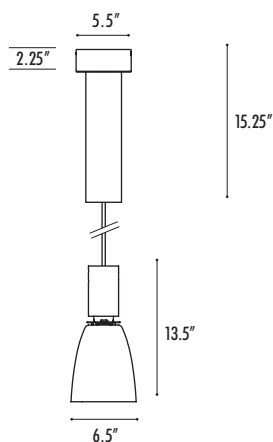

Aspect AL2347

metal LED pendant with glass shade



WHITE LEDS

Bridgelux Vero 18 COB.. 90 CRI. Specify color:
W30–3000°, **W35**–3500° or **W40**–4000° Kelvin.

DIMMING

- **D**–standard supplied driver. 0–10V, programmable, 1% dimming, 120/277V, 50/60 Hz.
- **BDIM-W11**–Lutron EcoSystem LED14 Series, 1% dimming, fade-to-off.
- **DA**–DALI, 1% dimming, fade-to-off. 120/277V, 50/60 Hz.

WATTS / LUMENS

WATTS	DELIVERED LUMENS	CRI	R9
21	2,125	90	50

EMERGENCY

Battery Pack provides 10W for 90 minutes. Canopy shown below. Order **EM**.

