

Aspect AL2387

metal LED pendant with glass shade



CONSTRUCTION

- Canopy mounts to standard J-box.
- Die cast aluminum housing and heat sink.
- Hand blown glass shade
- 6 ft. power cord supplied, standard. Specify **XP** for additional length (25 ft. max.).
- Drivers housed inside canopy for easy access.
- cUL listed for damp locations.

TYPE:	PROJECT:
ORDER NUMBER:	

MODEL#	OUTPUT (mA)	HOUSING FINISH	GLASS COLOR	LEDS	DIMMING	OPTIONS
AL2387	HO -1,000 MO -700	H -Hammerstone S -Silver W -White CC -Custom RAL color	I -Indigo M -Marine O -Opal T -Tangerine	W30 W35 W40	D -Standard BDIM-W11 DA -DALI	EM -Emergency


Example:

AL2387	HO	S	O	W35	D	
---------------	-----------	----------	----------	------------	----------	--


XP -Extra power cord (in inches, 25 ft. max.):		*CC -Custom RAL color:	
---	--	-------------------------------	--

*RAL color must be specified: [Tiger Drylac](#)

AL2387
21, 36.5 watts

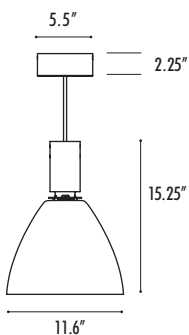

EM
Emergency

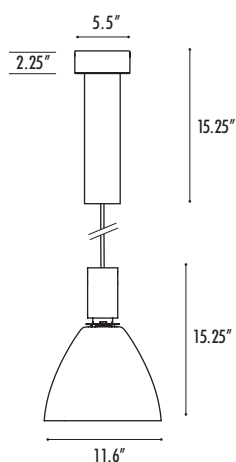

Aspect AL2387

metal LED pendant with glass shade



WHITE LEDS

Bridgelux Vero 18 COB.. 90 CRI. Specify color:
W30–3000°, **W35**–3500° or **W40**–4000° Kelvin.

DIMMING

- **D**–standard supplied driver. 0–10V, programmable, 1% dimming, 120/277V, 50/60 Hz.
- **BDIM-W11**–Lutron EcoSystem LED14 Series, 1% dimming, fade-to-off.
- **DA**–DALI, 1% dimming, fade-to-off. 120/277V, 50/60 Hz.

mA / WATTS / LUMENS

OUTPUT	CURRENT (mA)	WATTS	DELIVERED LUMENS	CRI	R9
HO	1,000	36.50	2,785	90	50
MO	700	21.00	2,125	90	50

EMERGENCY

Battery Pack provides 10W for 90 minutes. Canopy shown below. Order **EM**.

