




CONSTRUCTION

- Extruded aluminum outer housing, with inside /outside frosted acrylic lenses.

- Suspended with field-adjustable aircraft cable, with push-button glider. 8 ft. 18 AWG power cord. Push button grippers supplied, standard. Specify **XP** for additional length. (25 ft. maximum.)
- Default finish/power cord pairings are silver/gray, white/white, black/black.
- For RAL colors, power cord color must be specified.
- For differing fixture/canopy colors, please consult factory.
- Drivers and DMX module remotely installed in surface mount canopy. For remote driver installation, see page 2.
- Drivers are universal voltage (120–277V).
- Nominal diameters, right. For actual diameters (in.), see chart p. 2.
- cUL listed for dry and damp locations only.

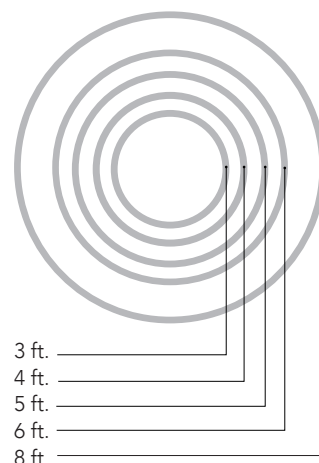


TYPE:	PROJECT:
ORDER NUMBER:	

MODEL#	FINISH			LEDS	MOUNT STYLE	DIMMING	OPTION
UDCi03-3 ft. UDCi04-4 ft. UDCi05-5 ft. UDCi06-6 ft. UDCi08-8 ft.	S-Silver W-White K-Black CC-RAL Color*	BW-Barn Wood CB-Carbon Fiber ES-Espresso HK-Honey Oak M-Maple	SD-Silver Driftwood DC-Dark Cherry KL-Khaki Leather (More see p. 3)	W30 W35 W40 RGBW-color + 3500° K white	S-Separate SR-Separate Remote C- Central CR-Central Remote NCR-Nexus CR	D BDIM-W11 DMX DA-DALI	SS EM TB
Example:							
UDCi05	CB			W35	SR	D	EM, TB

BDMXCON-W-white faceplate (enter quantity):	XP-Extra power cord (in inches, 25 ft. max.):
BDMXCON-B-black faceplate (enter quantity):	Specify canopy finish (silver, white, black):
EB-Earthquake Bracing Kit (enter quantity):	Specify power cord color (gray, white, black):
XL-custom lumen reduction (specify lumens):	*Specify RAL color number:

MOUNT STYLES

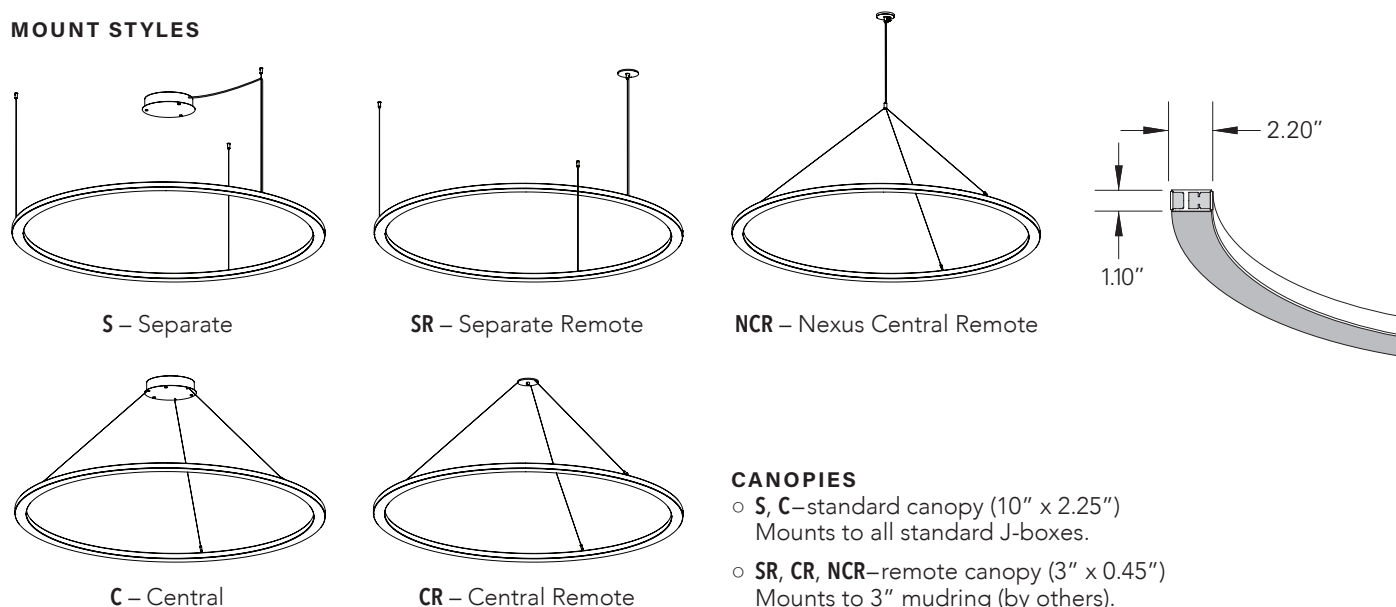

WHITE LEDS

Nichia Corp. NFSL757 tight bin chips on aluminum boards. 90 CRI. Specify color: W30–3000° Kelvin, W35–3500° Kelvin, or W40–4000° Kelvin.

CUSTOM LUMEN OUTPUT REDUCTION

Factory set custom reduced-lumen output driver configuration. Order **XL**. Specify lumens.

COLOR LEDS

RGBW with 3500° K white. Includes RGBW interface. Optional DMX controller also available. (See below, right.)

DIMMING

- **D**—standard supplied driver. 0–10V, programmable, 1% dimming, 120/277V, 50/60 Hz.
- **BDIM-W11**—Lutron EcoSystem LED14 Series, 1% dimming, fade-to-off. Remote (**SR**, **CR**, **NCR**) install only.
- **DA**—DALI 1% dimming, fade-to-off. 120–277V, 50/60 Hz.
- **DMX**—for both white and RGBW LEDs, 0.1% dimming fade-to-off. 120–277V, 50/60Hz.

SEPARATE SWITCHING

Inside and outside LEDs may be wired separately. The quantity of drivers and feed points may increase. Order **SS**.

DIAMETER / WATTS / LUMENS / DRIVERS REQUIRED / WEIGHT

LENGTH Nominal (Actual)	WATTS		DELIVERED LUMENS		DRIVERS REQUIRED	WEIGHT (lb.)
	White	RGBW	White	RGBW		
3 ft. (35.10 in.)	75	56	5,438	N/A	1	16
4 ft. (45.10 in.)	99	71	7,248	N/A	2	18
5 ft. (65.10 in.)	124	103	9,062	N/A	2	20
6 ft. (80.10 in.)	149	126	10,875	N/A	2	30
8 ft. (95.10 in.)	209	150	15,116	N/A	4 (2 for RGBW)	50

REMOTE DRIVERS


For suspended and hard lid ceilings with access panels. Canopy mounts to mud ring attached to J-box. Must be accessible after installation.

Standard pendant length: 8 ft. Specify **XP** for extra pendant. Maximum canopy to fixture distance: 25 ft. Maximum canopy to driver distance: 100 ft. (with 10 AWG wire).




Remote Driver Canopy
3.8 x 0.45 in.

SR – Separate mount driver installation. **TB**–T-Bar install shown.

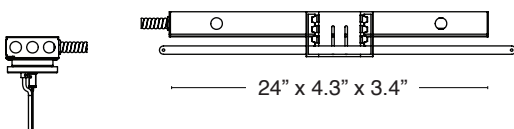


JOINER

8 ft. rings only. Joins two sections in the field.

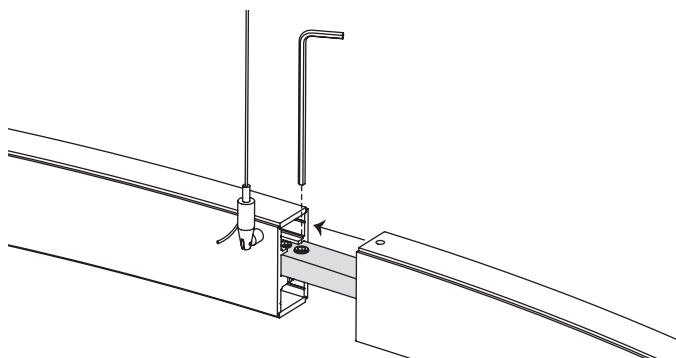


NOTE: Multiple drivers must be mounted no less than four inches apart side-by-side, and one inch apart end-to-end, to prevent overheating.

CR – Central mount remote driver installation. **TB**–T-Bar install shown.

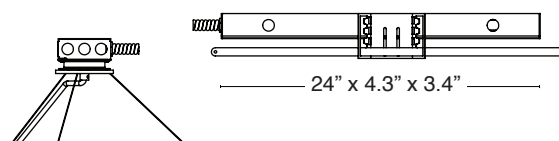

EM – Emergency. **TB**–T-bar install shown, below. Battery pack provides 10W for 90 minutes. Remote install only. Red driver light and test switch mounted in handy box installed at ceiling.

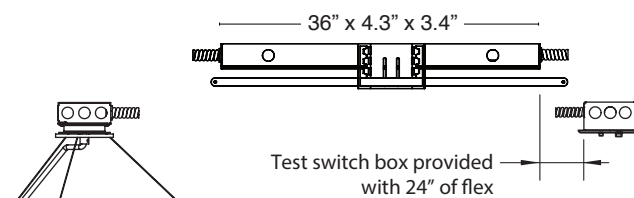

OPTIONAL DMX CONTROLLER

- Standalone, wall-mounted DMX controller for RGBW LED that provides direct access to fixtures. Power supply included.
- Tune color hue with sensitive wheel. Saturation and brightness control. On/off switch.
- See <https://www.nicolaudie.com/en/stick-de3.htm> for details. Order separately, either **BDMXCON-W**—white faceplate or **BDMXCON-B**—black faceplate.

PAINT FINISHES



S-Silver




W-white




K-Black


TEXTURED FINISHES



BW-Barnwood




CB-Carbon Fiber




ES-Espresso



HK-Honey Oak




M-Maple



SD-Silver Driftwood

PREMIUM TEXTURED FINISHES




DC-Dark Cherry



KL-Khaki Leather

METALLIC FINISHES



BR-Bronze



GF-Gold Leaf



CO-Copper



GT-Gold Textured



SA-Stainless Steel

TEXTURED FINISHES - CANOPY AND POWER CORD COLORS

Specify Silver, White, Black or RAL color for canopy.
Also specify Gray, White or Black power cord.