

# DL1400 Series

opal glass LED pendant luminaire



## CONSTRUCTION

- Canopy mounts to standard J-boxes, suspends from aircraft cables with push button gliders.
- Extruded aluminum housing and heat sink.
- Glass shade has an opal exterior, with matte opal interior.
- Standard mount is 6 ft. adjustable aircraft cable and power cord with silver finish fixtures, white cord with white finish fixtures. Order **XP** for extra pendant length.
- LED modules feature opal diffusers that provide the appearance of an A-lamp from below.
- UL/cUL listed for damp locations.

TYPE:	PROJECT:
ORDER NUMBER:	

MODEL#	LUMENS	HOUSING FINISH	GLASS	LEDS	VOLTAGE	DIMMING	OPTION
DL1402	2-2000	S-Silver	O-Opal	W35	1-120V	D-Standard	EM-Emergency
DL1403	3-3000	W-White		W40	2-277V	BDIM-W11	
DL1404	4-4000					DA-DALI	
Example:							
DL1404	3	S	O	W35		D	



XP-Extra power cord (in inches, 25 ft. max.)	
--	--

**DL1402**  
20W / 2,000 Lumens

**DL1403**  
30W / 3,000 Lumens

**DL14043**  
40W / 4,000 Lumens

**KLPEM**  
Emergency Battery Pack

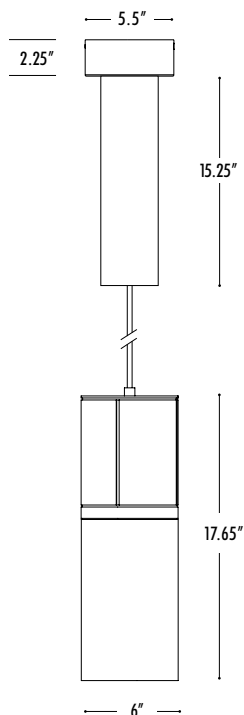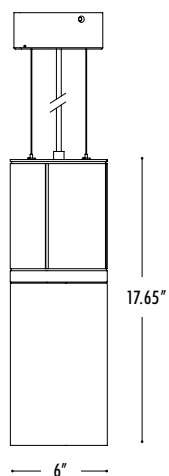

# DL1400 Series

opal glass LED pendant luminaire



## WHITE LEDS

LED modules feature opal diffuser that provide the appearance on an A-lamp from below. 90 CRI. Specify color: **W35**–3500° or **W40**–4000° Kelvin. CRI = 92, R9 = 72.

UL/cUL rated for dry locations only.

## WATTS / LUMENS

MODEL	WATTS	DELIVERED LUMENS
DL1402	22	2,000
DL1403	33	3,000
DL1404	44	4,000

**NOTE:** Aircraft cable suspension is not recommended for outdoor use, where fixture will be exposed to water, or subject to wind oscillation. Avoid use near HVAC vents and in environments with corrosive chemical vapors, such as swimming pools.

## DIMMING

- **D**—standard supplied driver. 0–10V, programmable, 1% dimming, 120/277V, 50/60 Hz.
- **BDIM-W11**—Lutron EcoSystem LED14 Series, 1% dimming, fade-to-off.
- **DA**—DALI, 1% dimming, fade-to-off. 120/277V, 50/60 Hz.

## EMERGENCY

Battery pack provides 10W for 90 minutes. Canopy shown below. Order **KLPEM**.

