

RLM pendant

LED metal pendant and wall mount luminaires



CONSTRUCTION

- Lensed LED module approved for food service use.
- Galvanized canopy mounts to J-box, with accessible LED driver for easy service.
- Powder coat finish (must specify).
- Supplied with 6' pendant. For extra pendant, specify **XP** (indicate in inches).
- Pendant mount cUL rated for damp locations.
- Pipe mount, both straight and curved, cUL rated for wet locations.

TYPE:	PROJECT:
ORDER NUMBER:	





MODEL#	EXT. FINISH	INT. FINISHS	LEDS	DIMMING	OPTIONS
PL1 PL6	S -Silver Texture W -White Texture K -Black Texture CC -Custom RAL color	W -White G -Gold	W27 W30 W35 W40	D -Standard BDIM-W11	EM -Emergency
Example:					
PL1	K	G	W35	D	

WM1 -Wall Mount*	*WM2 -Wall Mount
XP -Extra power cord (in inches, 25 ft. max.):	CM1 Pipe mount* (specify length, in inches):
	**CC - Custom RAL color:

PL1
28W – 2,500 delivered lumens

PL6
28W – 2,500 delivered lumens

***WM2**-See p. 2 for details.
**RAL color must be specified: [Tiger Drylac](#)

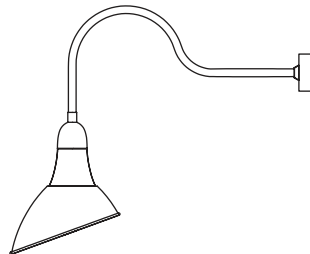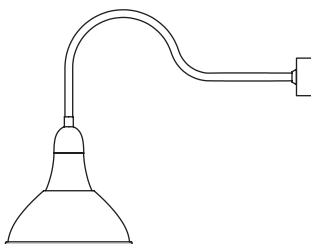

RLM pendant

LED metal pendant and wall mount luminaires



WHITE LEDS

Bridgelux Vero 18 COB with silicone lens, approved for foodservice applications. 90 CRI. Specify color: **W27**–2700° K, **W30**–3000° K, **W35**–3500° K, or **W40**–4000° K.

DIMMING

- **D**—standard supplied driver. 0–10V, programmable, 1% dimming, 120/277V, 50/60 Hz.
- **BDIM-W11**—Lutron EcoSystem LED14 Series, 1% dimming, fade-to-off.

EMERGENCY

Battery Pack provides 10W for 90 minutes. Canopy shown below. Order **EM**.

WATTS / LUMENS

MODEL	WATTS	DELIVERED LUMENS
PL1	28	2,500
PL6	28	2,500




RLM PL1 upview, LED module.


WALL MOUNT

- WM1**—Wall Mount
- WM2**—Wall Mount

WM1

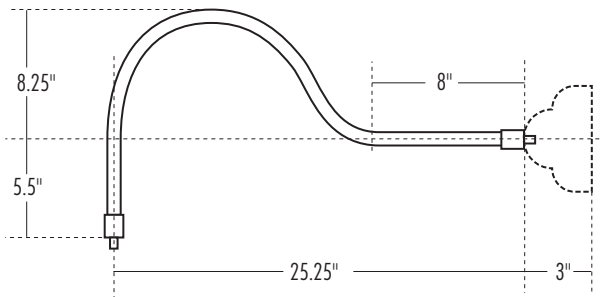

WM2

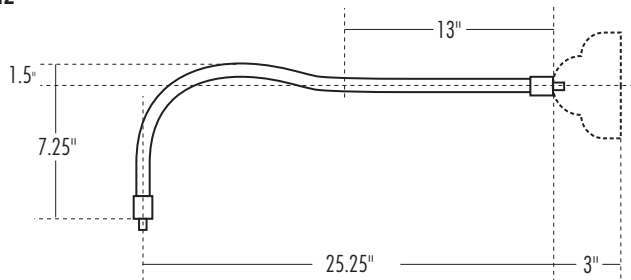

PIPE MOUNT

- CM1**— 2 ft. standard, 1/2" IPS pipe ceiling mount. Length must be specified (inches).

