

# Industrial IL7302-03-04-06

Stellar open aperture LED prismatic low bay



### CONSTRUCTION

- Canopy mounts to standard J-box.
- Die cast aluminum housing and heat sink.
- Clear prismatic acrylic shade.
- 6 ft. power cord supplied, standard. Specify **XP** for additional length (25 ft. max.).
- Default finish/power cord pairings are silver/gray, white/white, black/black.
- For RAL colors, power cord color must be specified.
- For differing fixture/canopy colors, please consult factory.
- Drivers are universal voltage (120–277V), integral or remote.
- Component design provides maximum airflow for cool operation.
- cUL listed for dry locations, standard drivers; damp locations only for remote drivers.

<b>TYPE:</b>	<b>PROJECT:</b>
<b>ORDER NUMBER:</b>	




MODEL#	LEDS	FINISH	DIMMING	OPTION	OPTION
IL7302	W30	S–Silver	D–Standard 0-10V	EM–Emergency	BA–Ball aligner
IL7303	W35	W–White	BDIM-W11		
IL7304	W40	K–Black	DA–DALI		
IL7306		CC–RAL Color*			
<i>Example:</i>					
IL7306	W35	1	D		

<b>XP</b> –Extra power cord (in inches, 25 ft. max.):		Specify <b>canopy</b> finish (silver, white, black):	
<b>EB</b> –Earthquake Bracing Kit (enter quantity):		Specify power cord color (gray, white, black):	
<b>XL</b> –Custom lumen reduction (specify lumens):		*Specify RAL color number:	
<b>CM1</b> –Pipe mount (24 in. included, specify total length):			

**IL7302**  
30 watts  
**IL7303**  
36 watts

**IL7304**  
47 watts  
**IL7306**  
83 watts

**EM**  
Emergency Battery Pack  
10W for 90 minutes

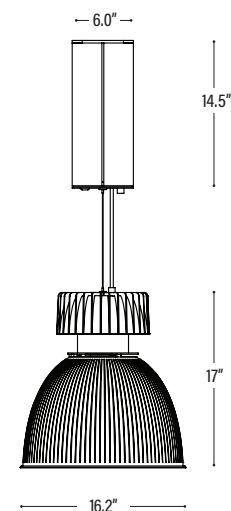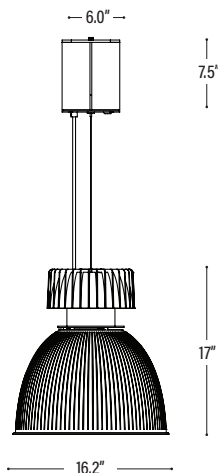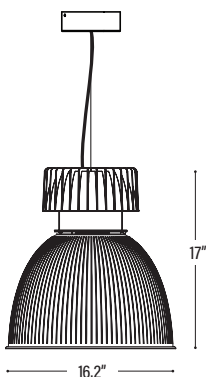

# Industrial IL7302-03-04-06

Stellar open aperture LED prismatic low bay



### WHITE LEDS

Nichia Corp. NFSL757 linear board chips. 90 CRI. Specify color: **W30**–3000° Kelvin, **W35**–3500° Kelvin, or **W40**–4000° Kelvin.

### CUSTOM LUMEN OUTPUT REDUCTION

Factory set custom reduced-lumen output driver configuration. Order **XL**. Specify lumens.

### DIMMING

- **D**—standard supplied driver. 0–10V, programmable, 1% dimming, 120/277V, 50/60 Hz.
- **BDIM-W11**—Lutron EcoSystem LED14 Series, 1% dimming, fade-to-off.
- **DA**—DALI, 1% dimming, fade-to-off. 120/277V, 50/60 Hz.

### EMERGENCY

Battery pack provides 90 minutes. See drawing on page 1. Order **EM**.

### mA / WATTS / LUMENS

MODEL	CURRENT (mA)	WATTS	DELIVERED LUMENS
<b>IL7302</b>	750	30	2,000
<b>IL7303</b>	900	36	3,000
<b>IL7304</b>	940	47	4,000
<b>IL7306</b>	1,700	83	6,000

**CM1**—1/2" ID hard stem option, supplied with swivel canopy for earthquake code, sloped ceilings, and indoor areas with light air movement (e.g., near HVAC vents). Pipe replaces power cord and cable. Length must be specified.

Pipe longer than 8 ft. will be shipped in two sections—one 8 ft., the other for the balance—with painted, threaded pipe coupler and set screws.

Remote installed required.

**NOTE:** Aircraft cable suspension is not recommended for outdoor use, where fixture will be exposed to water, or subject to wind oscillation. Avoid use near HVAC vents and in environments with corrosive chemical vapors, such as swimming pools.

