

Industrial IL7302-03-04-06

Stellar open aperture LED prismatic low bay



CONSTRUCTION

- Canopy mounts to standard J-box.
- Die cast aluminum housing and heat sink.
- Clear prismatic acrylic shade.
- Frosted 3/16" tempered, soda lime glass with 2 in. ventilation opening. Secured with a rubber gasket, the lens is held in place by three positive-locking clamps.
- 6 ft. power cord supplied, standard. Specify **XP** for additional length (25 ft. max.).
- Component design provides maximum airflow for cool operation.
- cUL listed for dry locations, standard drivers; damp locations only for remote drivers.


TYPE:	PROJECT:
ORDER NUMBER:	

MODEL#	LEDS	VOLTAGE	DIMMING	OPTION	OPTION
IL7302	W30	1-120V	D-Standard	EM-Emergency	I73WG-Wire Guard
IL7303	W35	2-277V	BDIM-W11		BA-Ball aligner
IL7304	W40		DA-DALI		
IL7306					
<i>Example:</i>					
IL7306	W35	1	D		

XP -Extra power cord (in inches, 25 ft. max.):	CM1 -Pipe mount (24 in. included, specify total length):
-------------------------------------------------------	-----------------------------------------------------------------


IL7302
30 watts

IL7303
36 watts

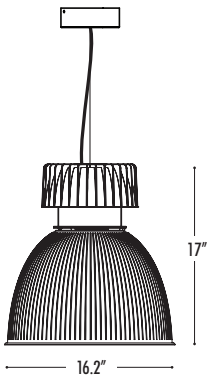


IL7304
47 watts

IL7306
83 watts

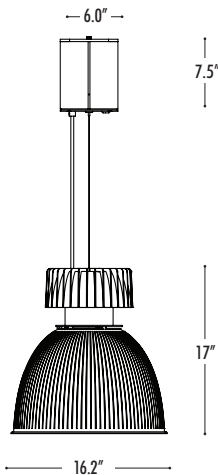

EM
Emergency Battery Pack
10W for 90 minutes

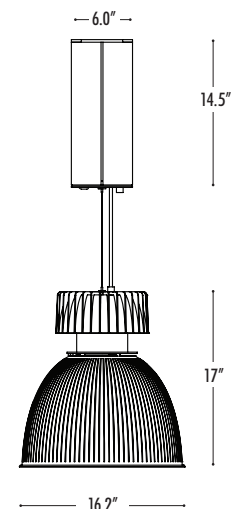

Industrial IL302-03-04-06



Stellar open aperture LED prismatic low bay

WHITE LEDS

Nichia Corp. chips, available in three colors: **W30**–3000°, **W35**–3500° or **W40**–4000° Kelvin.

DIMMING

- **D**—standard supplied driver. 0–10V, programmable, 1% dimming, 120/277V, 50/60 Hz.
- **BDIM-W11**—Lutron EcoSystem LED14 Series, 1% dimming, fade-to-off.
- **DA**—DALI, 1% dimming, fade-to-off. 120/277V, 50/60 Hz.

EMERGENCY

Battery pack provides 10W for 90 minutes. See drawing on page 1. Order **EM**.


mA / WATTS / LUMENS

MODEL	CURRENT (mA)	WATTS	DELIVERED LUMENS
IL7302	750	30	2,000
IL7303	900	36	3,000
IL7304	940	47	4,000
IL7306	1,700	83	6,000

CM1—1/2" ID hard stem option, supplied with swivel canopy for earthquake code, sloped ceilings, and indoor areas with light air movement (e.g., near HVAC vents). Pipe replaces power cord and cable. Length must be specified.

Pipe longer than 8 ft. will be shipped in two sections—one 8 ft., the other for the balance—with painted, threaded pipe coupler and set screws.

Remote installed required.



NOTE: Aircraft cable suspension is not recommended for outdoor use, where fixture will be exposed to water, or subject to wind oscillation. Avoid use near HVAC vents and in environments with corrosive chemical vapors, such as swimming pools.

WIRE GUARD

Available on all models.
Order **I73WG**.

