
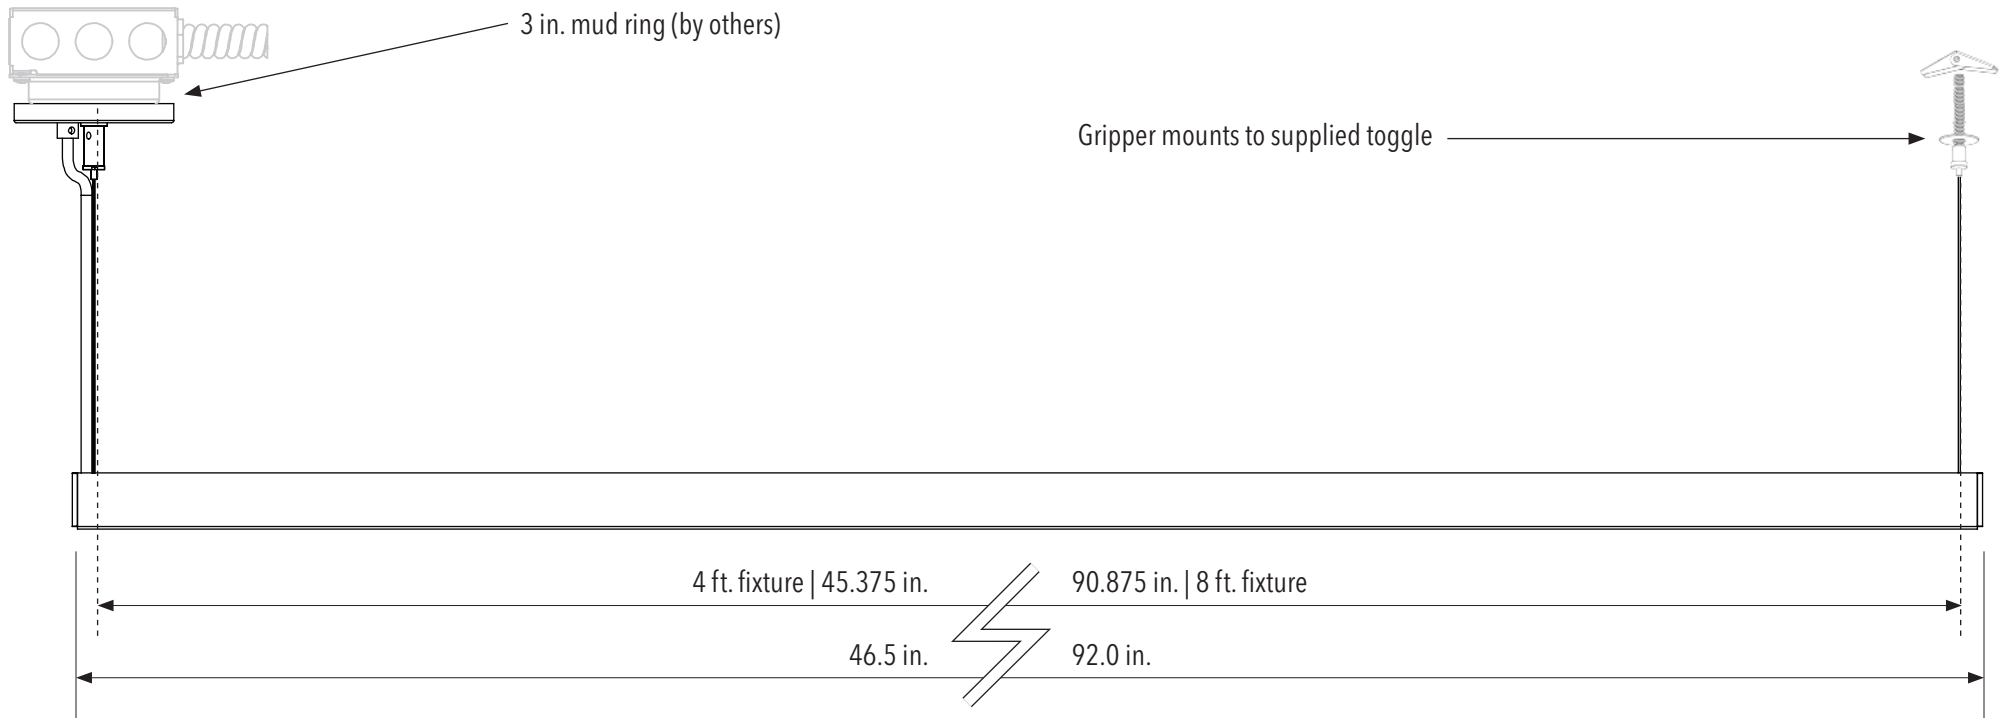






**WARNING:** Disconnect main power at the source prior to installation! Only qualified electricians should install Delray Lighting products.

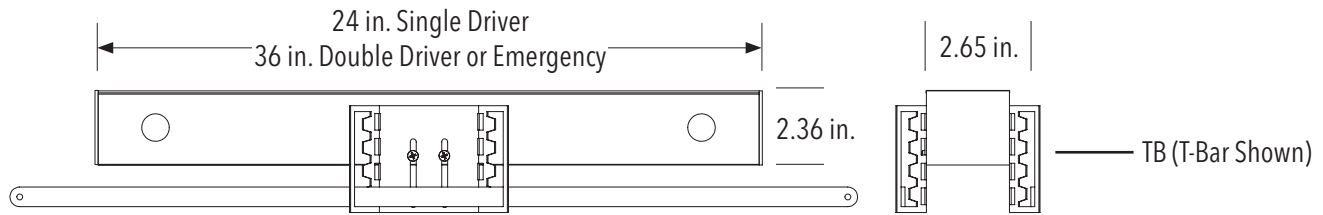

Max. Wiring Distance (at full load)

Wire Size (AWG) Distance (ft.)

18	18
16	29
14	46
12	71
10	120

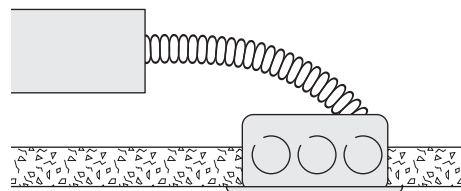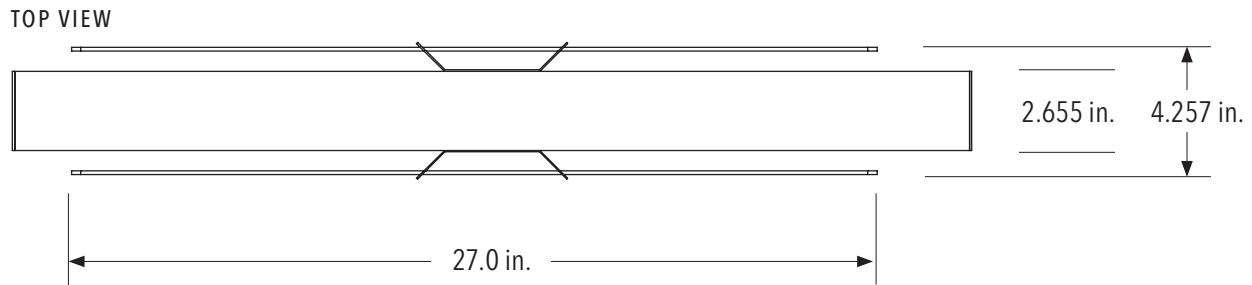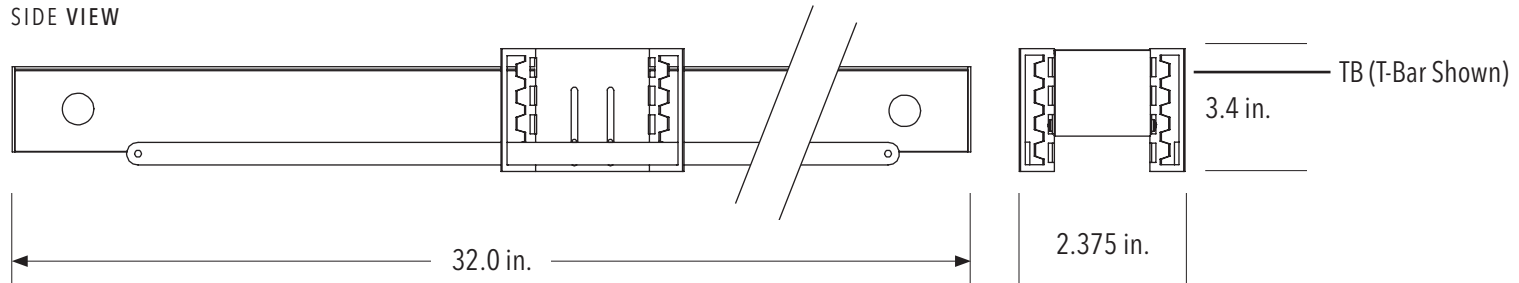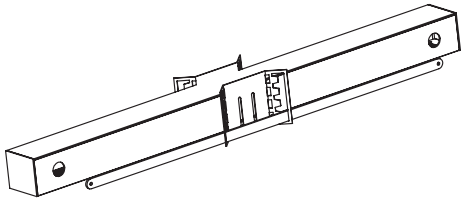


Test switch and charge indicator

**NOTE:** EM packs require 2x4 handy box mounted to ceiling for test switch and charge indicator light.

Maximum canopy to fixture distance: 25 ft.

Maximum canopy to driver distance: 100 ft. (with 10 AWG wire).

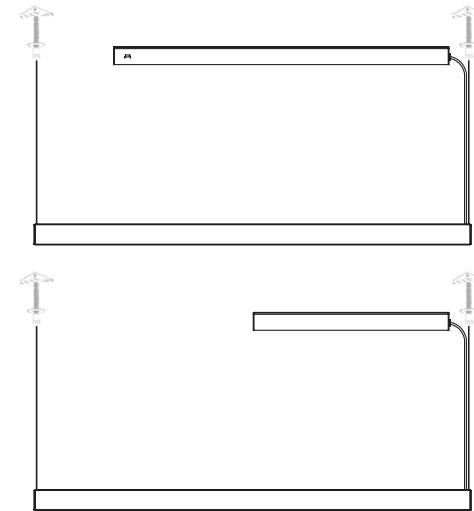

### Large SLRD For Dual Driver, RGB or EM

Remote driver housing has options for bar hangers for mount above suspended ceilings.

Drivers must remain accessible after installation, and must be mounted no less than 4 inches apart.

LEDs will not operate unless polarity is correct.

If Traxon control is ordered, housings with RJ45 jacks for DMX signal input and output will be included. Without Traxon, DMX control wires must be spliced inside housing.

Max. Wiring Distance (at full load)

Wire Size (AWG)	Distance (ft.)
18	18
16	29
14	46
12	71
10	120