

DOS iO chandeliers

in/out circular LED pendants with acrylic lenses



CONSTRUCTION


- Extruded aluminum housing with Inside/outside frosted acrylic lenses.
- Choose up to three rings per chandelier. For more than three, please consult factory.
- 8 ft. shipped in two sections, with joiners for assembly in the field.
- Each section includes one 8 ft. 18 AWG adjustable power cord and AC cables. Push button grippers supplied, standard.
- Specify **XP** for additional length (25 ft. max.).
- Default finish/power cord pairings are silver/gray, white/white, black/black.
- For RAL colors, power cord color must be specified.
- For differing fixture/canopy colors, please consult factory.
- Drivers and DMX module remotely installed in surface mount canopy. For remote driver installation, see p. 2.
- Drivers are universal voltage (120–277V).
- cUL listed for dry and damp locations only.

TYPE:	PROJECT:
ORDER NUMBER:	


MODEL#	SIZE	FINISH	LEDS	DIMMING	OPTION
UDCioG—Gyroscope UDCioN—Nexus UDCioC—Cascade	3 ft. 4 ft. 5 ft. 6 ft. 8 ft.	S—Silver W—White K—Black BW—Barn Wood CB—Carbon Fiber ES—Espresso HK—Honey Oak M—Maple SD—Silver Driftwood DC—Dark Cherry TL—Tan Leather KL—Khaki Leather	W30 W35 W40 RGBW—color + 3500° K white	D—Standard BDIM-W11 DMX DA—DALI	SS EM TB
Example:					
UDCioC	3/4/5	S	W35	D	EM, TB

BDMXCON-W—white faceplate (enter quantity):	XP—Extra power cord (in inches, 25 ft. max.):
BDMXCON-B—black faceplate (enter quantity):	Specify canopy finish (silver, white, black):
EB—Earthquake Bracing Kit (enter quantity):	Specify power cord color (gray, white, black):
XL—custom lumen reduction (specify lumens):	*Specify RAL color number:



UDCioG—Dos iO Gyroscope,
Central Remote mount
Choose up to three: 3/4/5/6/8 ft.



UDCioN—Dos iO Nexus,
Central Remote mount
Choose up to three: 3/4/5/6/8 ft.

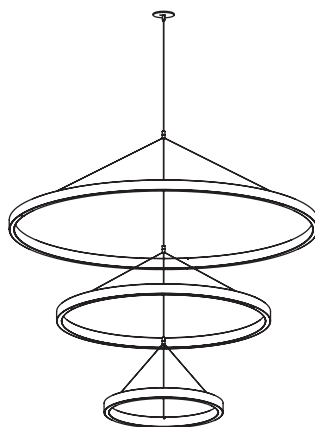

UDCioC—Dos iO Cascade,
Separate Remote mount
Choose up to three: 3/4/5/6/8 ft.

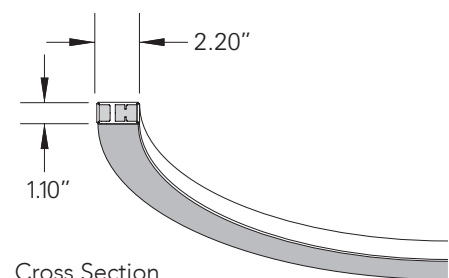

DOS iO chandeliers

in/out circular LED pendants with acrylic lenses



WHITE LEDS

Nichia Corp. NFSL757 tight bin chips on aluminum boards. 90 CRI. Specify color: W30–3000° Kelvin, W35–3500° Kelvin, or W40–4000° Kelvin.

CUSTOM LUMEN OUTPUT REDUCTION

Factory set custom reduced-lumen output driver configuration. Order **XL**. Specify lumens.

COLOR LEDS

RGBW with 3500° K white. Includes RGBW interface. Optional DMX controller also available. (See below. right.)

DIMMING

- **D**—standard supplied driver. 0–10V, programmable, 1% dimming, 120/277V, 50/60 Hz.
- **BDIM-W11**—Lutron EcoSystem LED14 Series, 1% dimming, fade-to-off. Remote install only.
- **DA**—DALI 1% dimming, fade-to-off. 120–277V, 50/60 Hz.
- **DMX**—for both white and RGBW LEDs, 0.1% dimming fade-to-off. 120–277V, 50/60Hz.

SEPARATE SWITCHING

Inside and outside LEDs may be wired separately. The quantity of drivers and feed points may increase. Order **SS**.

DIAMETER / WATTS / LUMENS / DRIVERS REQUIRED / WEIGHT

LENGTH Nominal (Actual)	WATTS		DELIVERED LUMENS		DRIVERS REQUIRED	WEIGHT (lb.)
	White	RGBW	White	RGBW		
3 ft. (35.10 in.)	75	56	5,438	N/A	1	16
4 ft. (45.10 in.)	99	71	7,248	N/A	2	18
5 ft. (65.10 in.)	124	103	9,062	N/A	2	20
6 ft. (80.10 in.)	149	126	10,875	N/A	2	30
8 ft. (95.10 in.)	209	150	15,116	N/A	4 (2 for RGBW)	50

REMOTE DRIVERS

Drivers must be remote. For suspended and hard lid ceilings with access panels. Canopy mounts to mud ring attached to J-box. Must be accessible after installation.



NOTE: Multiple drivers must be mounted no less than four inches apart side-by-side, and one inch apart end-to-end, to prevent overheating.

Standard pendant length: 8 ft. Specify **XP** for extra pendant. Maximum canopy to fixture distance: 25 ft. Maximum canopy to driver distance: 100 ft. (with 10 AWG wire).





Remote Driver Canopy
3.8 x 0.45 in.

UDCioN, UDCioC – separate mount driver installation. **TB**—T-Bar install shown.




UDCioG – central mount remote driver installation. **TB**—T-Bar install shown.



AIRCRAFT CABLE

NOTE: Not recommended for outdoor use, where fixture will be exposed to water, or subject to wind oscillation. Avoid use near HVAC vents and in environments with corrosive chemical vapors, such as swimming pools.

EM – Emergency. **TB**—T-bar install shown, below. Battery pack provides 10W for 90 minutes. Remote install only. Red driver light and test switch mounted in handy box installed at ceiling.

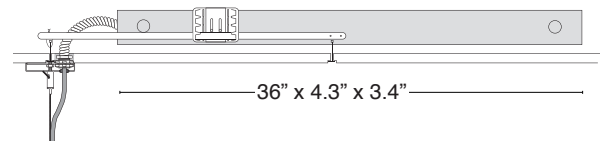


OPTIONAL DMX CONTROLLER

- Standalone, wall-mounted DMX controller for RGBW LED that provides direct access to fixtures. Power supply included.
- Tune color hue with sensitive wheel. Saturation and brightness control. On/off switch.
- See <https://www.nicolaudie.com/en/stick-cw4.htm> for details.

Order separately, either **BDMXCON-W**—white faceplate or **BDMXCON-B**—black faceplate.

JOINER

8 ft. rings only. Joins two sections in the field.

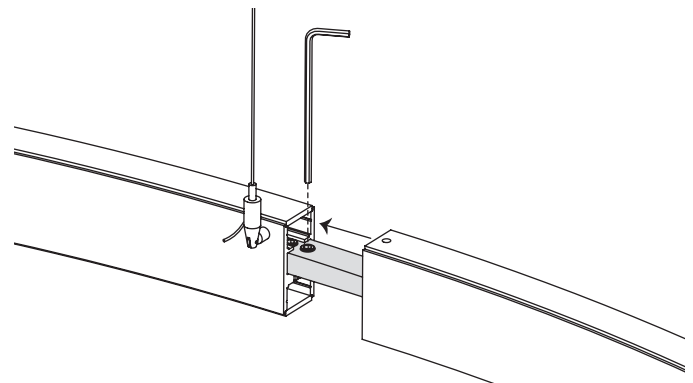




DOS iO chandeliers



in/out circular LED pendants with acrylic lenses



PAINT FINISHES

SWATCH	FINISH NO.
	S -Silver
	W -white
	K -Black

TEXTURED FINISHES

SWATCH	FINISH NO.
	BW -Barnwood
	CB -Carbon Fiber
	ES -Espresso
	HK -Honey Oak
	M -Maple
	SD -Silver Driftwood

PREMIUM TEXTURED FINISHES

SWATCH	FINISH NO.
	DC -Dark Cherry
	TL -Tan Leather
	KL -Khaki Leather

TEXTURED FINISHES - CANOPY AND POWER CORD COLORS

Specify Silver, White, Black or RAL color for canopy. Also specify Gray, White or Black power cord.