







DRAFT Circles

1" Angled Profile Outwards, Up/Down

Draft Circles are the next generation of linear profile pendants. Featuring minimalist 1-inch aluminum housings designed for elegance and efficiency in compact spaces or low ceilings. A newly designed flexible polymer lens enhances visual comfort with uniform, expansive illumination, balancing clarity and refined design with ultimate flexibility in size and shape.

Key Features

- Distinctive 20° angled light profile
- Precision-crafted 6063 aluminum housing
- Single-piece flexible diffuse lens
- Various mounting options for integral or remote drivers
- Extensive library of powder coat and laminate finishes
- Lumen output range: 250-750 lm/ft

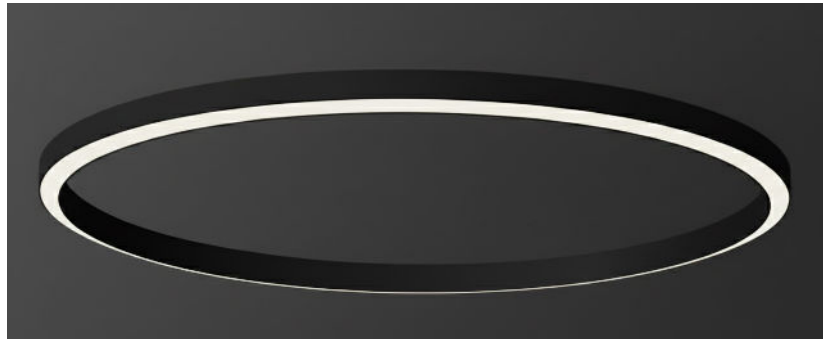

ORDERING INFORMATION

Ordering Example: D1A2UD-C8-MM35DMSRBW-2CEMEBXP300-****

Series		Type		Shape		Size		Direct Output		Indirect Output	
D1A2	Draft Angle, 1" Width, Angled Outwards	D	Down (Direct)	C	Circle	2	2' Diameter, 6.28' Circumference ¹	(Blank)	None	(Blank)	None
		U	Up (Indirect)			3	3' Diameter, 9.42' Circumference	L	Low, 250 Lm/FT	L	Low, 250 Lm/FT
		UD	Up/Down (Indirect/Direct)			4	4' Diameter, 12.57' Circumference	M	Medium, 500 Lm/FT	M	Medium, 500 Lm/FT
						5	5' Diameter, 15.71' Circumference	H	High, 750 Lm/FT ²	H	High, 750 Lm/FT ²
						6	6' Diameter, 18.85' Circumference	C	Custom ³ (Specify Lm/FT)	C	Custom ³ (Specify Lm/FT)
						8	8' Diameter, 25.13' Circumference ³				

CRI/CCT	DRIVER	MOUNTING ⁴	FINISH ⁶	OPTIONS	CUSTOM
27 90 CRI/ 2700K	DM Dimming Multiple Forward/Reverse Phase (@ 120V only) 0-10V Wires Present (@ 120-277V)	S Separate Mount, Power Feed SR Separate Remote Mount, Power Feed SF Semi-Flush Surface Mount ⁵	SV Silver	2C 2-Circuit ⁷	**** Custom Configuration ⁸
30 90 CRI/ 3000K			WH White	EM Emergency Battery	
35 90 CRI/ 3500K			BK Black	EB Earthquake Bracing Kit	
40 90 CRI/ 4000K			BW Barnwood	XP*** Extra Power Cord (specify inches) 300" Max	
	DE Lutron Hi-Lume EcoSystem Driver, 120-277V, 1% linear dimming		CB Carbon Fiber		
	D8 DALI-2 Driver, 120-277V, 0.1% logarithmic dimming		ES Espresso		
	D9 DMX512 (RDM) Driver, 120-277V, 0.1% non-linear dimming		HK Honey Oak		
	CX Custom Specified		MP Maple		
			SD Silver Driftwood		
			DC Dark Cherry		
			KL Khaki Leather		
			BR Bronze		
			GF Gold Leaf		
			CO Copper		
			GT Gold Textured		
			SA Stainless Steel		
			CC Custom RAL Color		

¹ Not available in Up/Down (UD) option.

² Only available with remote driver mounting options (SR, CR, SF).

³ Custom output not to exceed High Output, 750 Lm/FT (H).

⁴ Includes standard aircraft cable length of 8'. For additional lengths consult factory.

⁵ Only available with remote driver. Semi-Flush Surface Mount (SF) only available in Down (D) optics.


⁶ Canopy finish (Silver, White, Black) & Power Cord (Grey, White, Black) matches Selected Standard Paint Finish (SV, WH, BK).

Consult factory for additional options and premium textured/metallic finishes.

⁷ Drivers for 2-Circuit options match based on selection. For alternate drivers for each circuit, consult factory.

⁸ Consult factory for any custom specifications or additional options.

DIMENSIONS AND MOUNTING

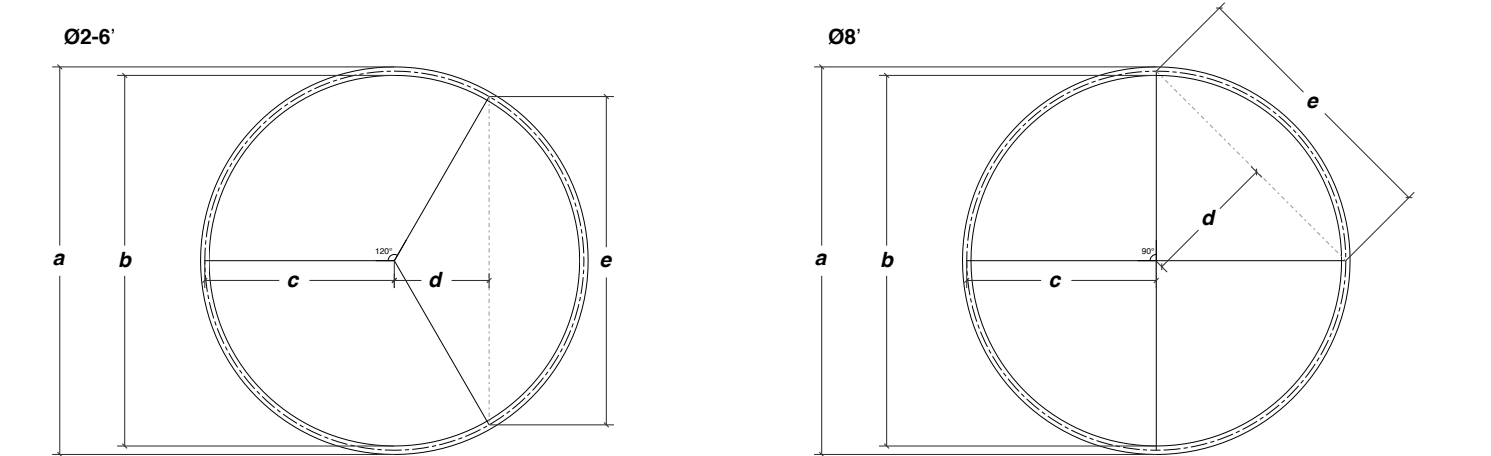


Size	a (outer dia.)	b (inner dia.)	c (radius)	d (apothem)	e (chord length)	# of mtg. points	Max Weight (lbs.)	Profile Width
2'	25.08"	22.93"	12.00"	6.00"	20.79"	3	5.7	1.075"
3'	37.08"	34.93"	18.00"	9.00"	31.18"	3	8.5	1.075"
4'	49.08"	46.93"	24.00"	12.00"	41.57"	3	11.3	1.075"
5'	61.08"	58.93"	30.00"	15.00"	51.96"	3	14.1	1.075"
6'	73.08"	70.93"	36.00"	18.00"	62.35"	3	17	1.075"
8'	97.08"	94.93"	48.00"	33.94"	67.88"	4	22.6	1.075"


Canopy style	Diameter	Height	Weight
Separate (S)	10.0"	2.25"	TBD
Separate Remote (SR)	3.8"	0.45"	TBD
Semi-Flush Surface (SF)	3.8"	0.45"	TBD

MOUNTING OPTIONS

S - SEPARATE


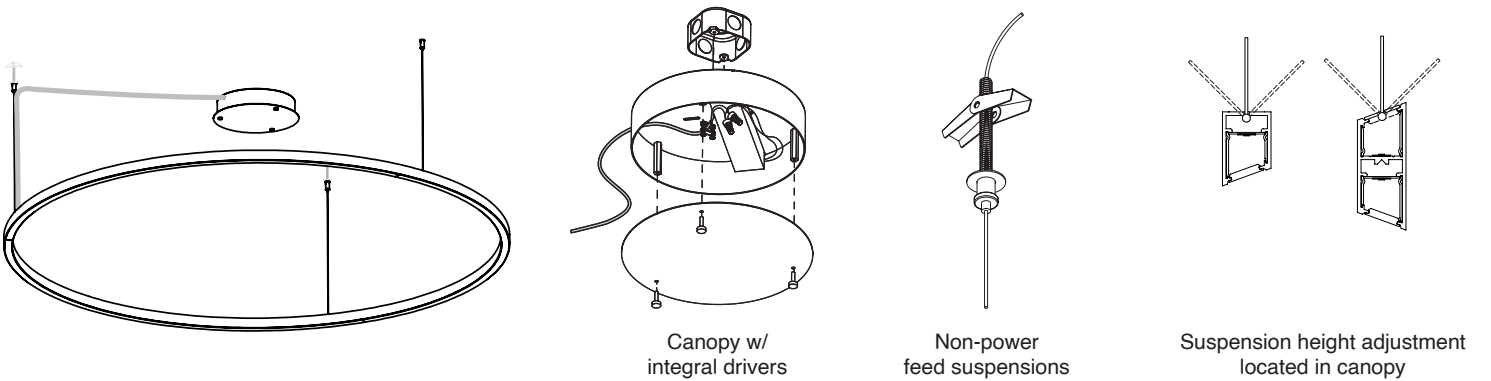


SR - SEPARATE REMOTE

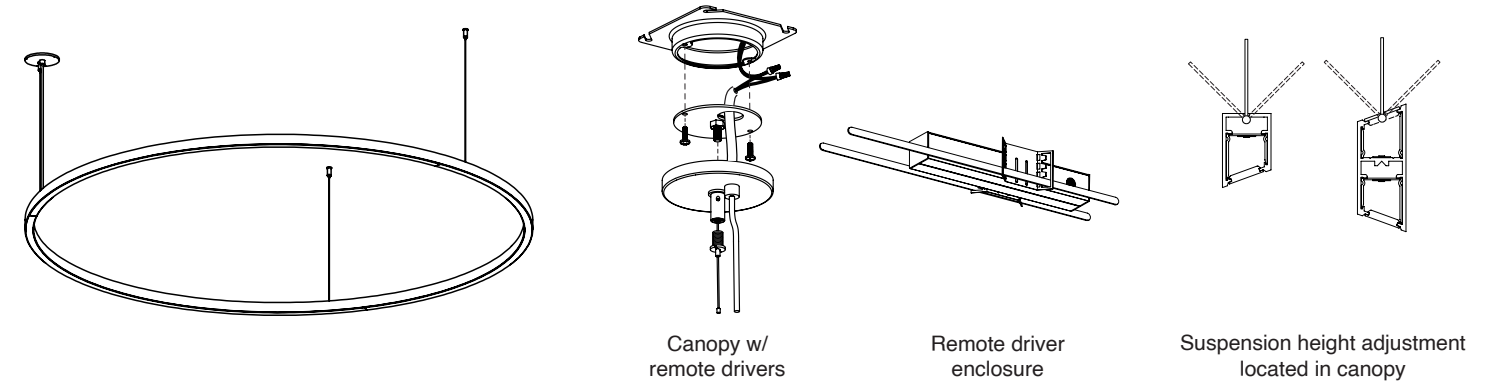


MOUNTING OPTIONS (CONT.)


SF - SEMI-FLUSH SURFACE

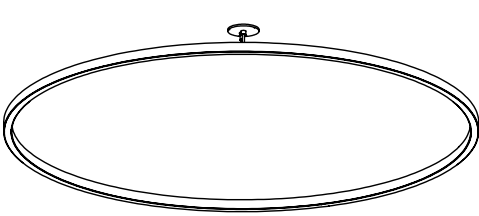

Canopy w/
remote drivers




Non-power
feed stand-offs



Remote driver
enclosure

PHOTOMETRIC DATA

PLOTS

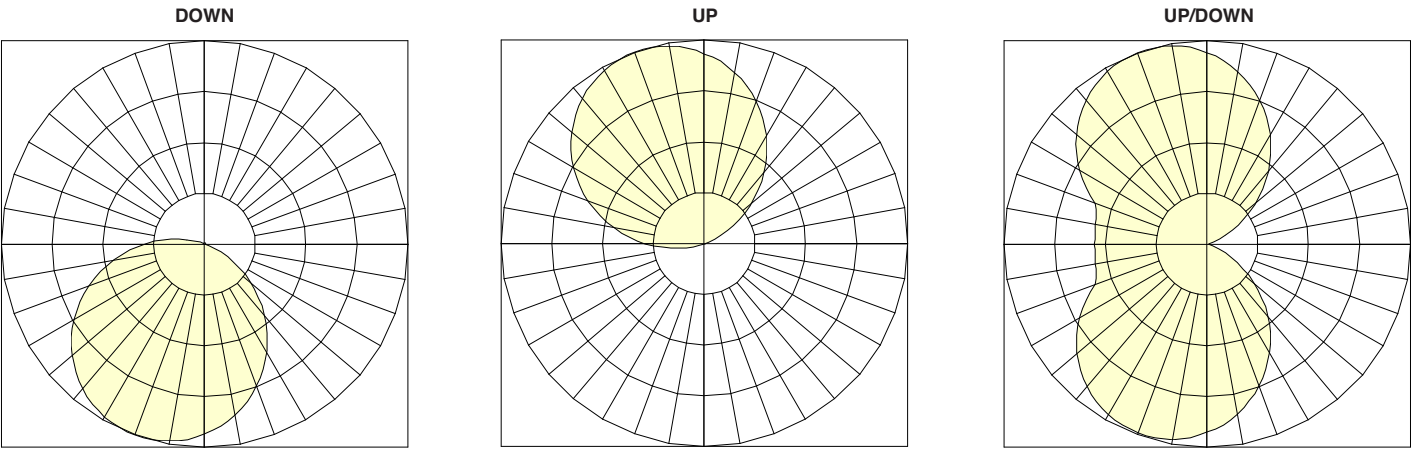

BASIC PARAMETERS

D1A2D / D1A2U

SIZE	CCT	CRI	R9	OUTPUT			
				LABEL	HI	MED	LOW
2'	3500	92-93+	46-54+	Lumens	4.869	3.261	1.602
				Watts	62.8	41.5	22.0
				LPW	77.5	78.6	72.9
3'	3500	92-93+	46-54+	Lumens	7.304	4.891	2.403
				Watts	94.2	62.2	33.0
				LPW	77.5	78.6	72.9
4'	3500	92-93+	46-54+	Lumens	9.739	6.522	3.204
				Watts	125.7	82.9	44.0
				LPW	77.5	78.6	72.9
5'	3500	92-93+	46-54+	Lumens	12.174	8.152	4.006
				Watts	157.1	103.7	55.0
				LPW	77.5	78.6	72.9
6'	3500	92-93+	46-54+	Lumens	14.608	9.783	4.807
				Watts	188.5	124.4	66.0
				LPW	77.5	78.6	72.9
8'	3500	92-93+	46-54+	Lumens	19.478	13.044	6.409
				Watts	251.3	165.9	88.0
				LPW	77.5	78.6	72.9

MULTIPLIER

CCT	OUTPUT		
	HIGH	MED	LOW
2700	0.94	0.97	0.97
3000	0.93	0.96	0.96
3500	1.00	1.00	1.00
4000	0.99	1.02	1.02







D1A2UD

SIZE	CCT	CRI	R9	OUTPUT			
				LABEL	HI	MED	LOW
3'	3500	92-93+	46-54+	Lumens	14.175	9.670	4.769
				Watts	186.6	124.4	66.0
				LPW	76.0	77.7	72.3
4'	3500	92-93+	46-54+	Lumens	18.900	12.893	6.359
				Watts	248.8	165.9	88.0
				LPW	76.0	77.7	72.3
5'	3500	92-93+	46-54+	Lumens	23.625	16.116	7.948
				Watts	311.0	207.3	110.0
				LPW	76.0	77.7	72.3
6'	3500	92-93+	46-54+	Lumens	28.350	19.340	9.538
				Watts	373.2	248.8	131.9
				LPW	76.0	77.7	72.3
8'	3500	92-93+	46-54+	Lumens	37.800	25.786	12.717
				Watts	497.6	331.8	175.9
				LPW	76.0	77.7	72.3

TM-30 REPORT

CCT: 3279 K
 D_{uv} : -0.0017

P2 V- F3

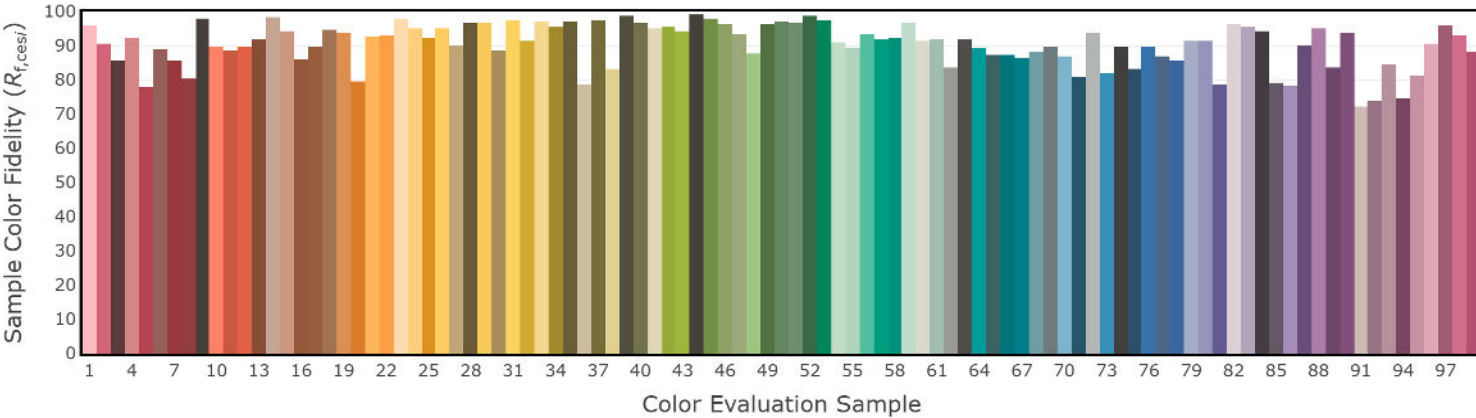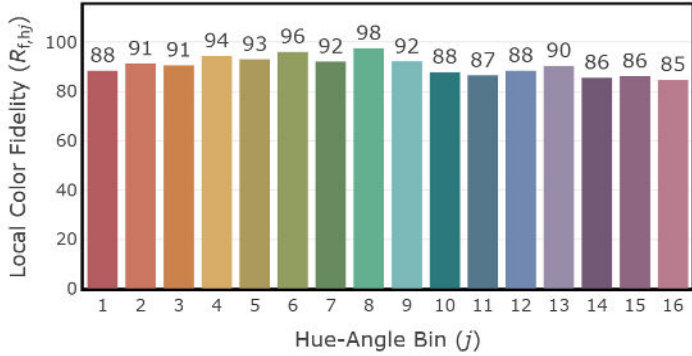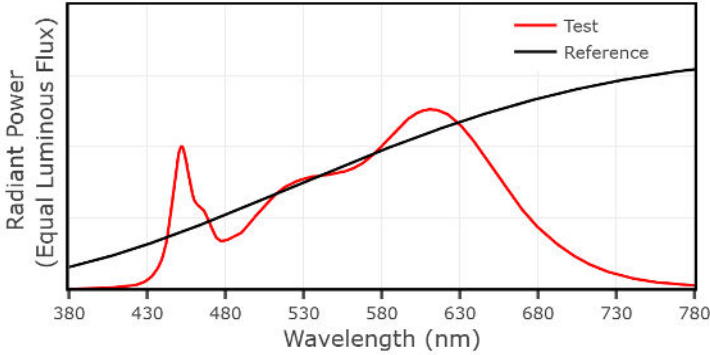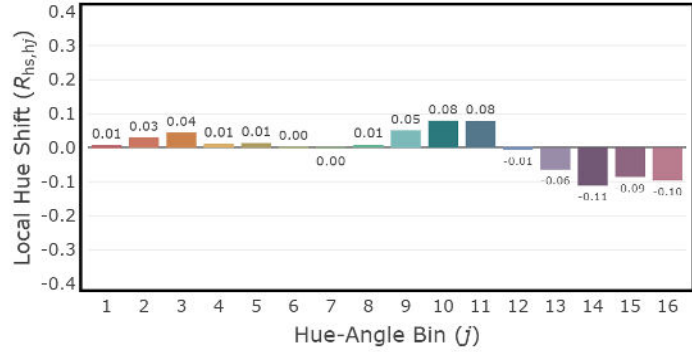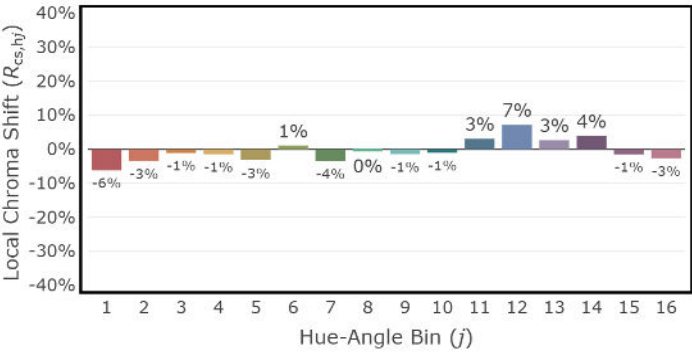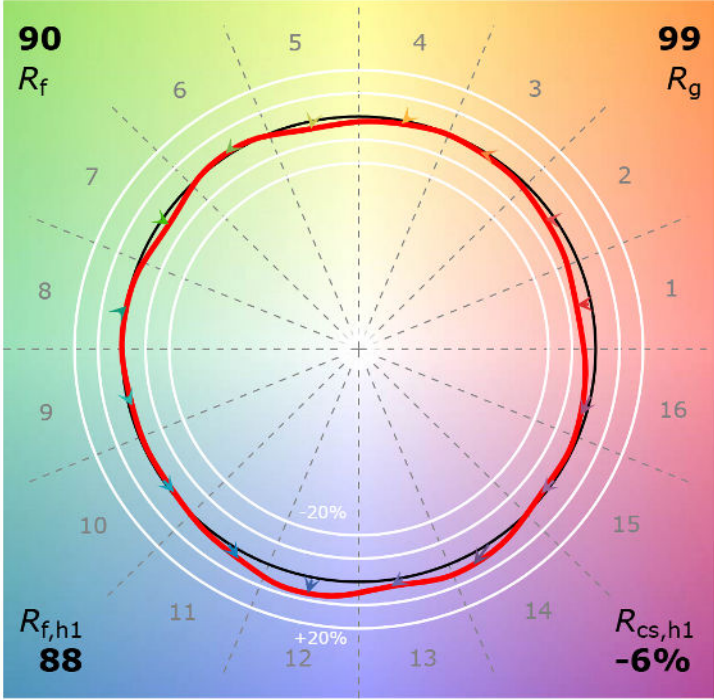



©2026 Delray Lighting INC
Originated in 1991, Delray has long been a manufacturer of energy-efficient decorative architectural lighting fixtures. As an industry leader, innovator, and early adaptor; Delray remains on the cutting edge of architectural lighting design and technology.

We reserve the right to change or withdraw specifications without prior notice.

HEADQUARTERS
9200 Deering Avenue
Chatsworth, CA 91311
(818) 767-3793

delraylighting.com