






DRAFT Circles

1" Angled Profile Upwards, In/Out

Draft Circles are the next generation of linear profile pendants. Featuring minimalist 1-inch aluminum housings designed for elegance and efficiency in compact spaces or low ceilings. A newly designed flexible polymer lens enhances visual comfort with uniform, expansive illumination, balancing clarity and refined design with ultimate flexibility in size and shape.

Key Features

- Distinctive 20° angled light profile
- Precision-crafted 6063 aluminum housing
- Single-piece flexible diffuse lens
- Various mounting options for integral or remote drivers
- Extensive library of powder coat and laminate finishes
- Lumen output range: 250-750 lm/ft



ORDERING INFORMATION

Ordering Example: D1A3IO-C8-MM35DMSRBW-2CEMEBXP300-****

Series		Type	Shape	Size		Inwards Output		Outwards Output			
D1A3	Draft Angle, 1" Width, Angled Upwards	I	Inside (Inwards)	C	Circle	2	2' Diameter, 6.28' Circumference ¹	(Blank)	None	(Blank)	None
		O	Outside (Outwards)	3	3' Diameter, 9.42' Circumference	L	Low, 250 Lm/FT	L	Low, 250 Lm/FT		
		IO	Inside/Outside (Inwards/Outwards)	4	4' Diameter, 12.57' Circumference	M	Medium, 500 Lm/FT	M	Medium, 500 Lm/FT		
				5	5' Diameter, 15.71' Circumference	H	High, 750 Lm/FT ²	H	High, 750 Lm/FT ²		
				6	6' Diameter, 18.85' Circumference	C	Custom ³ (Specify Lm/FT)	C	Custom ³ (Specify Lm/FT)		
				8	8' Diameter, 25.13' Circumference ³						

CRI/CCT	DRIVER	MOUNTING ⁴	FINISH ⁶	OPTIONS	CUSTOM
27 90 CRI/ 2700K	DM Dimming Multiple Forward/Reverse Phase (@ 120V only) 0-10V Wires Present (@ 120-277V)	S Separate Mount, Power Feed SR Separate Remote Mount, Power Feed SF Semi-Flush Surface Mount ⁵	SV Silver	2C 2-Circuit ⁷	**** Custom Configuration ⁸
30 90 CRI/ 3000K			WH White	EM Emergency Battery	
35 90 CRI/ 3500K			BK Black	EB Earthquake Bracing Kit	
40 90 CRI/ 4000K			BW Barnwood	XP*** Extra Power Cord (specify inches) 300" Max	
	DE Lutron Hi-Lume EcoSystem Driver, 120-277V, 1% linear dimming		CB Carbon Fiber		
	D8 DALI-2 Driver, 120-277V, 0.1% logarithmic dimming		ES Espresso		
	D9 DMX512 (RDM) Driver, 120-277V, 0.1% non-linear dimming		HK Honey Oak		
	CX Custom Specified		MP Maple		
			SD Silver Driftwood		
			DC Dark Cherry		
			KL Khaki Leather		
			BR Bronze		
			GF Gold Leaf		
			CO Copper		
			GT Gold Textured		
			SA Stainless Steel		
			CC Custom RAL Color		

¹ Not available in In/Out (IO) option.

² Only available with remote driver mounting options (SR, CR, SF).

³ Custom output not to exceed High Output, 750 Lm/FT (H).

⁴ Includes standard aircraft cable length of 8'. For additional lengths consult factory.

⁵ Only available with remote driver.


⁶ Canopy finish (Silver, White, Black) & Power Cord (Grey, White, Black) matches Selected Standard Paint Finish (SV, WH, BK).

Consult factory for additional options and premium textured/metallic finishes.

⁷ Drivers for 2-Circuit options match based on selection. For alternate drivers for each circuit, consult factory.

⁸ Consult factory for any custom specifications or additional options.

DIMENSIONS AND MOUNTING

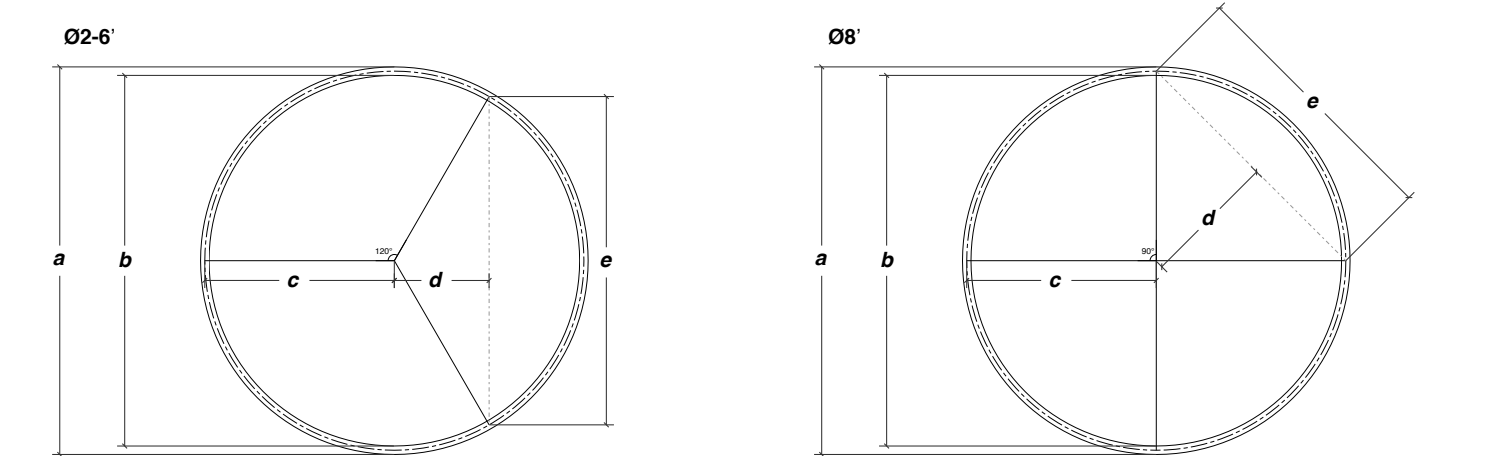


Size	a (outer dia.)	b (inner dia.)	c (radius)	d (apothem)	e (chord length)	# of mtg. points	Max Weight (lbs.)	Profile Width
2'	25.08"	22.93"	12.00"	6.00"	20.79"	3	5.7	1.075"
3'	37.08"	34.93"	18.00"	9.00"	31.18"	3	8.5	1.075"
4'	49.08"	46.93"	24.00"	12.00"	41.57"	3	11.3	1.075"
5'	61.08"	58.93"	30.00"	15.00"	51.96"	3	14.1	1.075"
6'	73.08"	70.93"	36.00"	18.00"	62.35"	3	17	1.075"
8'	97.08"	94.93"	48.00"	33.94"	67.88"	4	22.6	1.075"


Canopy style	Diameter	Height	Weight
Separate (S)	10.0"	2.25"	TBD
Separate Remote (SR)	3.8"	0.45"	TBD
Semi-Flush Surface (SF)	3.8"	0.45"	TBD

MOUNTING OPTIONS

S - SEPARATE


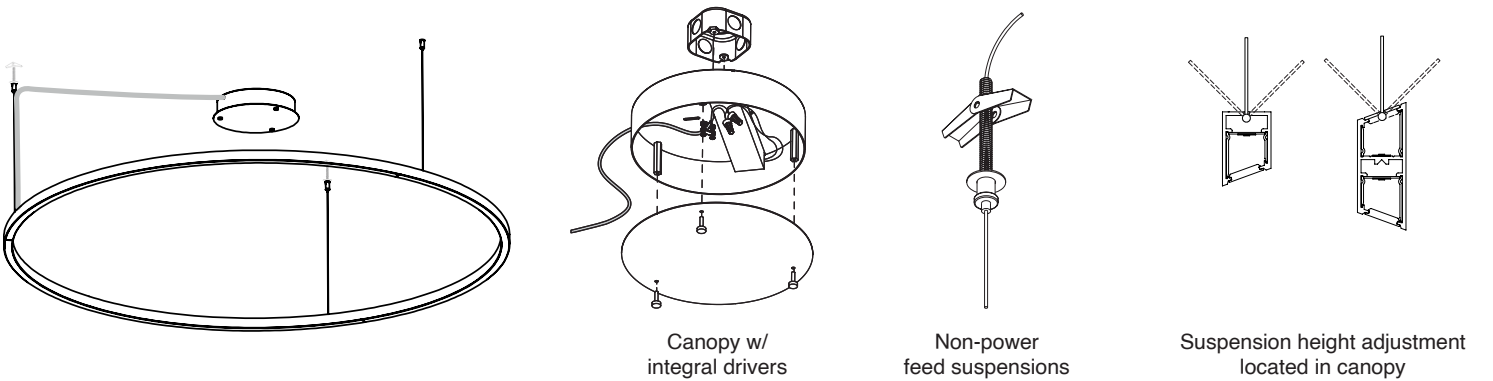


SR - SEPARATE REMOTE

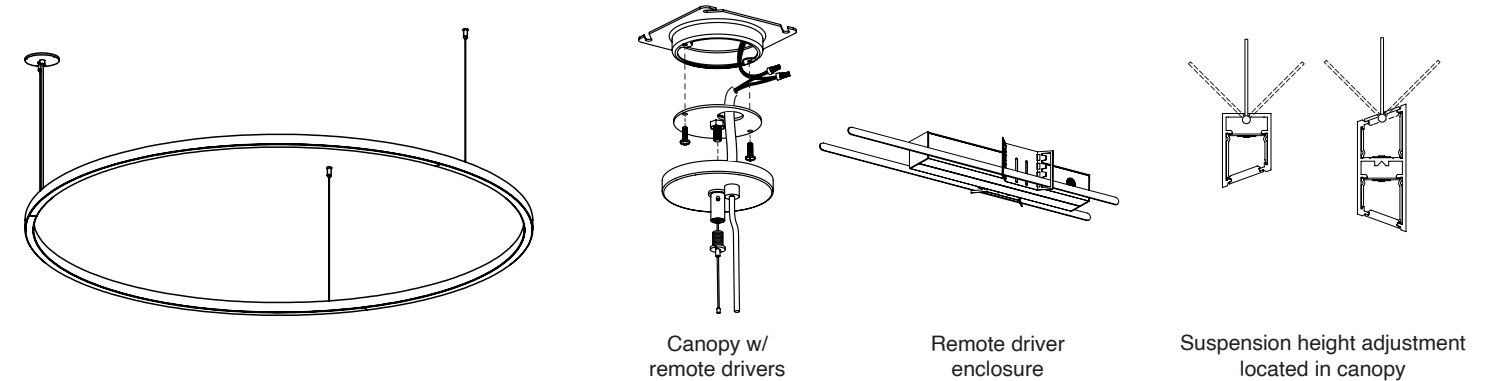


MOUNTING OPTIONS (CONT.)


SF - SEMI-FLUSH SURFACE

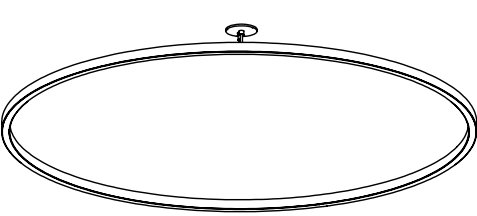

Canopy w/
remote drivers




Non-power
feed stand-offs



Remote driver
enclosure

PHOTOMETRIC DATA

PLOTS

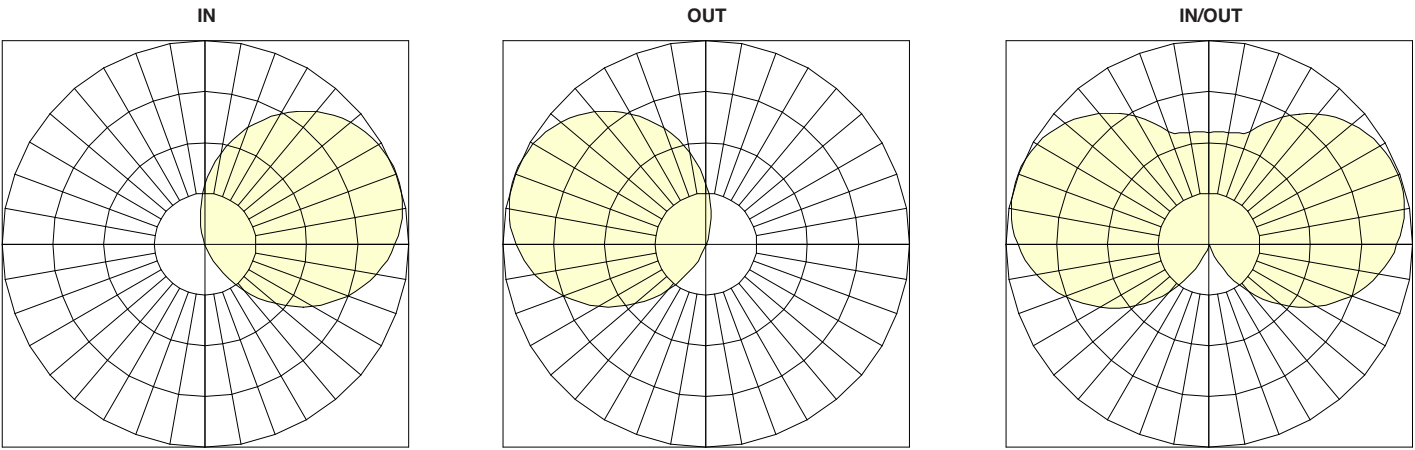

BASIC PARAMETERS

D1A3I / D1A3O

SIZE	CCT	CRI	R9	OUTPUT			
				LABEL	HI	MED	LOW
2'	3500	92-93+	46-54+	Lumens	3.914	2.621	1.288
				Watts	62.8	41.5	22.0
				LPW	62.3	63.2	58.6
3'	3500	92-93+	46-54+	Lumens	5.872	3.932	1.932
				Watts	94.2	62.2	33.0
				LPW	62.3	63.2	58.6
4'	3500	92-93+	46-54+	Lumens	7.829	5.243	2.576
				Watts	125.7	82.9	44.0
				LPW	62.3	63.2	58.6
5'	3500	92-93+	46-54+	Lumens	9.786	6.554	3.220
				Watts	157.1	103.7	55.0
				LPW	62.3	63.2	58.6
6'	3500	92-93+	46-54+	Lumens	11.743	7.864	3.864
				Watts	188.5	124.4	66.0
				LPW	62.3	63.2	58.6
8'	3500	92-93+	46-54+	Lumens	15.658	10.486	5.152
				Watts	251.3	165.9	88.0
				LPW	62.3	63.2	58.6

MULTIPLIER

CCT	OUTPUT		
	HIGH	MED	LOW
2700	0.94	0.97	0.97
3000	0.93	0.96	0.96
3500	1.00	1.00	1.00
4000	0.99	1.02	1.02







D1A3IO

SIZE	CCT	CRI	R9	OUTPUT			
				LABEL	HI	MED	LOW
3'	3500	92-93+	46-54+	Lumens	11.743	7.773	3.834
				Watts	188.5	124.4	66.0
				LPW	62.3	62.5	58.1
4'	3500	92-93+	46-54+	Lumens	15.658	10.364	5.111
				Watts	251.3	165.9	88.0
				LPW	62.3	62.5	58.1
5'	3500	92-93+	46-54+	Lumens	19.572	12.955	6.389
				Watts	314.2	207.3	110.0
				LPW	62.3	62.5	58.1
6'	3500	92-93+	46-54+	Lumens	23.487	15.547	7.667
				Watts	377.0	248.8	131.9
				LPW	62.3	62.5	58.1
8'	3500	92-93+	46-54+	Lumens	31.315	20.729	10.223
				Watts	502.7	331.8	175.9
				LPW	62.3	62.5	58.1

TM-30 REPORT

CCT: 3279 K
 D_{uv} : -0.0017

P2 V- F3

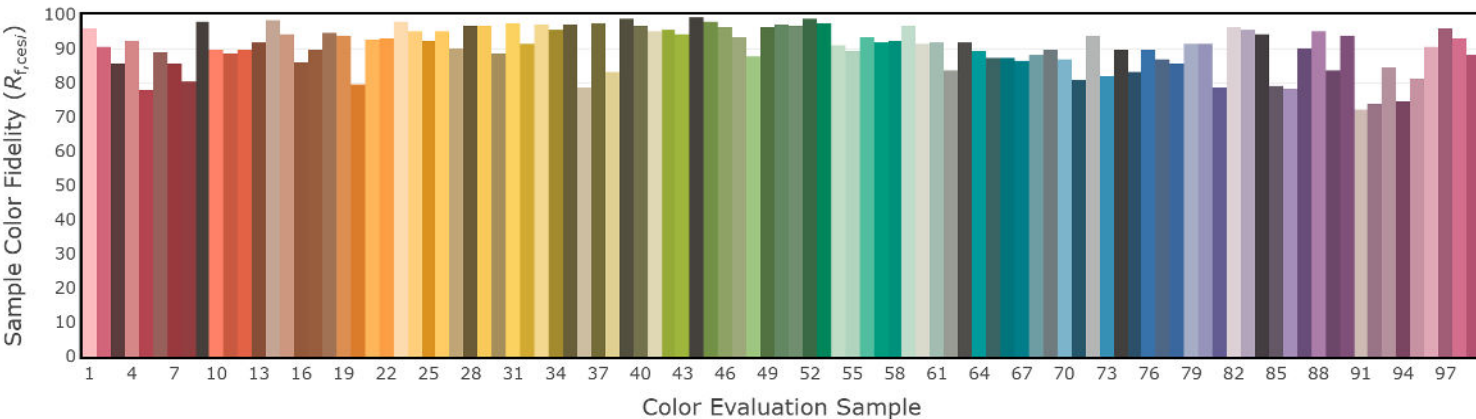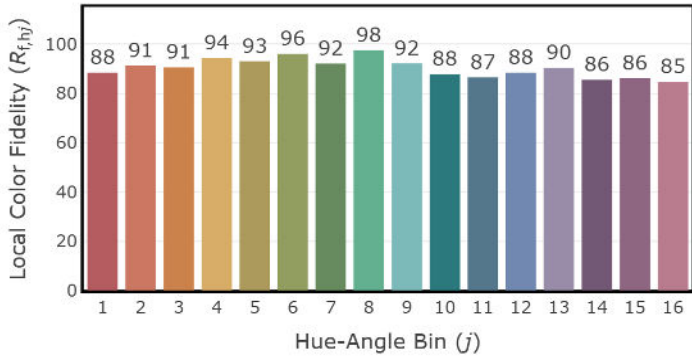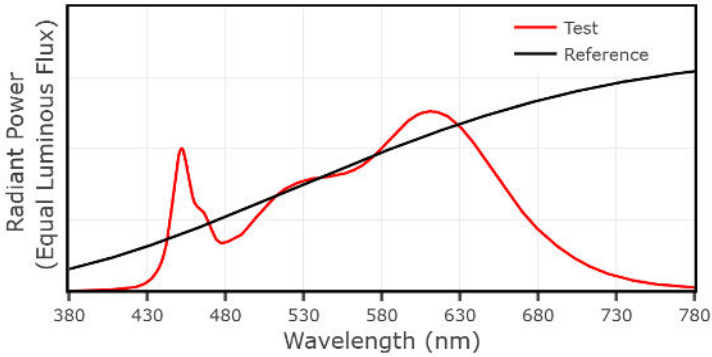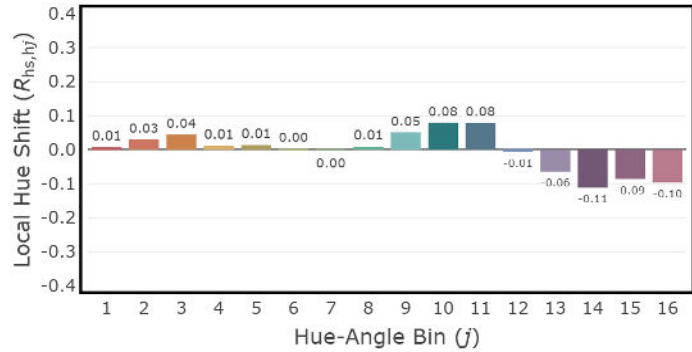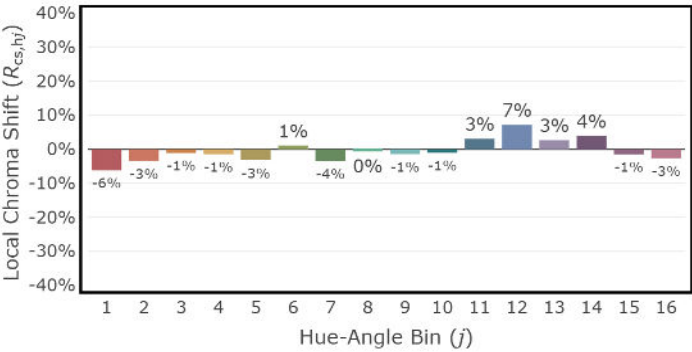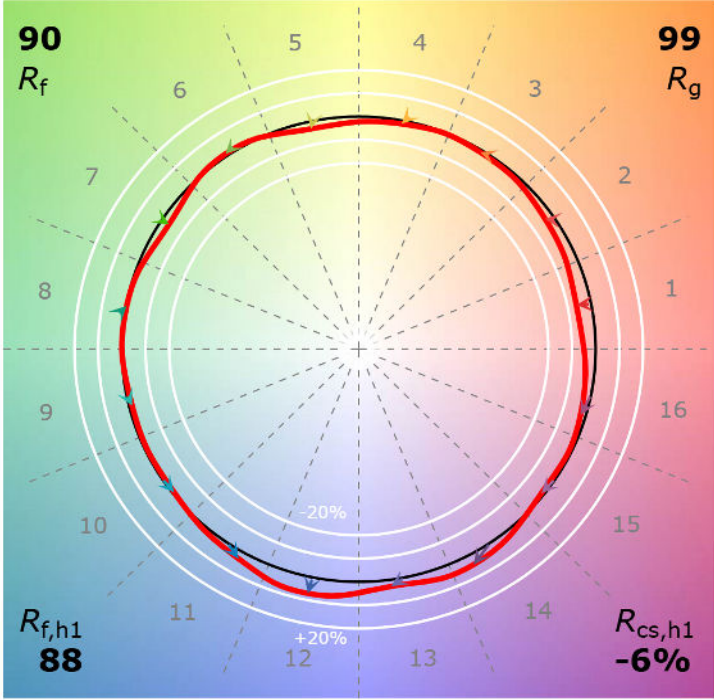



©2026 Delray Lighting INC
Originated in 1991, Delray has long been a manufacturer of energy-efficient decorative architectural lighting fixtures. As an industry leader, innovator, and early adaptor; Delray remains on the cutting edge of architectural lighting design and technology.

We reserve the right to change or withdraw specifications without prior notice.

HEADQUARTERS
9200 Deering Avenue
Chatsworth, CA 91311
(818) 767-3793

delraylighting.com