

Dusk AG950

half frosted clear glass globe LED pendant




CONSTRUCTION

- Aluminum housing (shown in **C**-Copper finish)
- Hand blown glass globe, top half clear, bottom half frosted
- 6 ft. gray or white 18 AWG adjustable power cord supplied, standard. Specify **XP** for additional length (25 ft. max.).
- Drivers installed in surface mount canopy. For remote driver installation, see p. 2.
- cUL listed for dry locations only.

TYPE:	PROJECT:
ORDER NUMBER:	

MODEL#	HOUSING FINISH	LEDS	DIMMING	OPTIONS
AG950	S -Silver W -White K -Black C -Copper	W30 W35 W40	D -Standard BDIM-W11 DA -DALI	EM -Emergency EMR -Emergency Remote
<i>Example:</i>				
AG950	C	W30	D	

XP -Extra power cord (in inches, 25 ft. max.)	
--	--

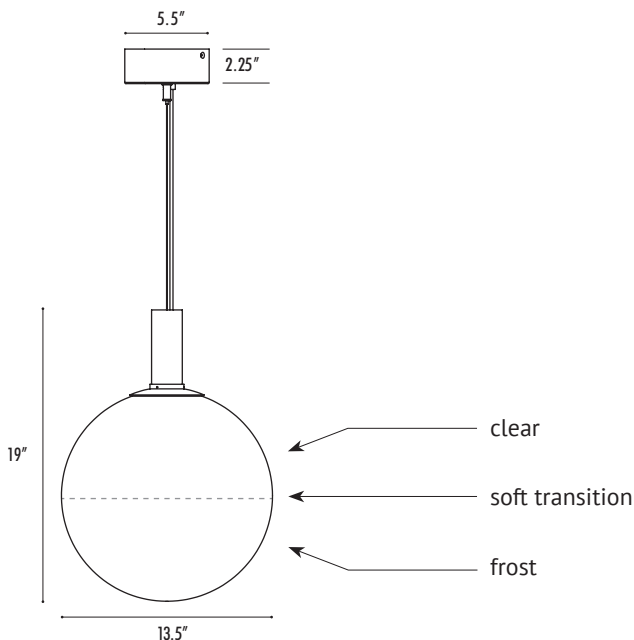

Dusk pendant

half frosted clear glass globe LED pendant



WHITE LEDS

Bridgelux Vero 10 COB.. 90 CRI. Specify color:
W30–3000°, **W35**–3500° or **W40**–4000° Kelvin.

DIMMING

- **D**–standard supplied driver. 0–10V, programmable, 1% dimming, 120/277V, 50/60 Hz.
- **BDIM-W11**–Lutron EcoSystem LED14 Series, 1% dimming, fade-to-off.
- **DA**–DALI, 1% dimming, fade-to-off. 120/277V, 50/60 Hz.

WATTS / LUMENS

WATTS	DELIVERED LUMENS	CRI	R9
11.3	747	90	50

REMOTE DRIVERS

For suspended and hard lid ceilings with access panels. Canopy mounts to mud ring attached to J-box. Must be accessible after installation.

Standard pendant length: 6 ft. Specify **XP** for extra pendant. Maximum canopy to fixture distance: 25 ft. Maximum canopy to driver distance: 100 ft. (with 10 AWG wire).




Remote Driver Canopy
3.8 x 0.45 in.

EMERGENCY REMOTE

Battery pack provides 10W for 90 minutes. Includes red light/test switch in handybox. Order **EMR**.

EMERGENCY

Battery pack provides 10W for 90 minutes. Canopy shown below. Order **EM**.

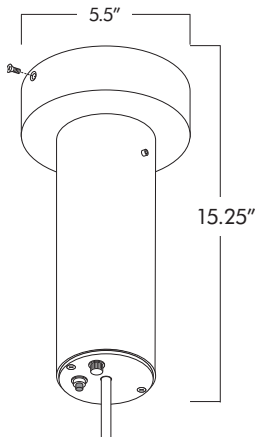





Dusk pendant

half frosted clear glass globe LED pendant



PAINT FINISHES

SWATCH	FINISH NO.
	S-Silver
	W-white
	K-Black
	C-Copper