


# Stick SLT9 trim 18

adjustable LED single lamp cantilever with perforated white reflector

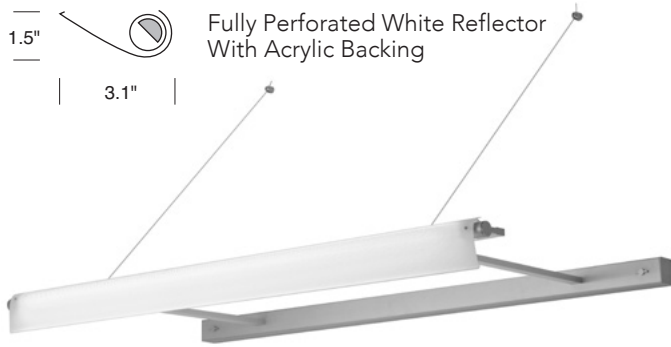

### CONSTRUCTION

- o Single 2, 3 and 4 ft., or double 6 and 8 ft., wall mount, cantilevered fixture that may be installed stand-alone or in continuous runs. Mounted to continuous wireway and driver housing Rail System.
- o The back plate has a 7/8" opening for direct conduit power feed at the end caps, or from anywhere along the Rail housing.
- o Projections are available in lengths of 6, 12, 18 and 24 inches, standard. Also available in custom lengths (specify).
- o Projections over 12 inches require aircraft cable support (4 ft. cable and angle-adjusting cable grippers supplied).
- o cUL listed for damp locations.


<b>TYPE:</b>	<b>PROJECT:</b>
<b>ORDER NUMBER:</b>	

MODEL#	LENGTH (ft.)	PROJECTION (inches)	HO/LO	LEDS	DIMMING	EMERGENCY	OPTION	TRIM
SLT9 - Stand-Alone	8	6	LO	W30	D-Standard	EM -Emergency	SRB9S	18
SLTR9 - Right	6	12	HO	W35	BDIM-W11		SRB9R	
SLTM9 - Middle	4	18		W40				
SLTL9 - Left	3	24						
	2							
Example:								
SLT9	8		HO	W35	D		SRB9S	18

Custom Projection (in inches):	XL- custom lumen reduction (specify lumens):	
Run Length (total feet):		



MODEL  
SLT98LO/HO  
SLT96LO/HO

LENGTH  
8 ft.  
6 ft.

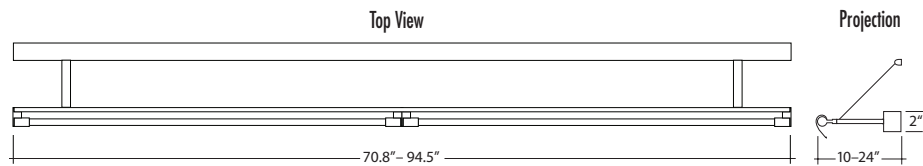

MODEL  
SLT94LO/HO  
SLT93LO/HO  
SLT92LO/HO

LENGTH  
4 ft.  
3 ft.  
2 ft.

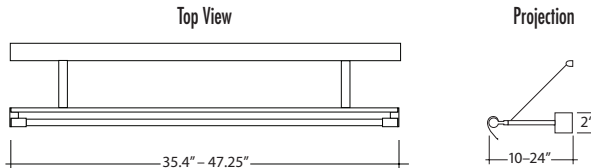

Lamp rotates 270°, in 15° stepped increments, to direct light where needed.

# Stick SLT9 trim 18

adjustable LED single lamp cantilever with perforated white reflector



## WHITE LEDS

Samsung tight bin chips on aluminum clad boards. 90 CRI. Specify color: W30–3000° Kelvin, W35–3500° Kelvin, or W40–4000° Kelvin color temperature.

## DIMMING

- **D**—standard supplied driver. 0–10V, programmable, 1% dimming, 120/277V, 50/60 Hz.
- **BDIM-W11**—Lutron EcoSystem LED14 Series, 1% dimming, fade-to-off.

## EMERGENCY

For 4' through 8' fixtures only. Battery pack provides 10W for 90 minutes. Adds additional length to driver housing.

## CUSTOM LUMEN OUTPUT REDUCTION

Factory set custom reduced-lumen output driver configuration. Order **XL**. Specify lumens.


## WATTS / LUMENS / EFFICACY

LENGTH	WATTS	DELIVERED LUMENS	EFFICACY
2 ft. <b>LO</b>	8	722	97 LPW
2 ft. <b>HO</b>	16	1,443	97 LPW
3 ft. <b>LO</b>	12	1,082	97 LPW
3 ft. <b>HO</b>	23	2,165	97 LPW
4 ft. <b>LO</b>	16	1,443	97 LPW
4 ft. <b>HO</b>	31	2,886	97 LPW

## AIRCRAFT CABLE

**NOTE:** Not recommended for outdoor use, where fixture will be exposed to water. Avoid use in environments with corrosive chemical vapors, such as swimming pools.

## CONNECTING SECTIONS

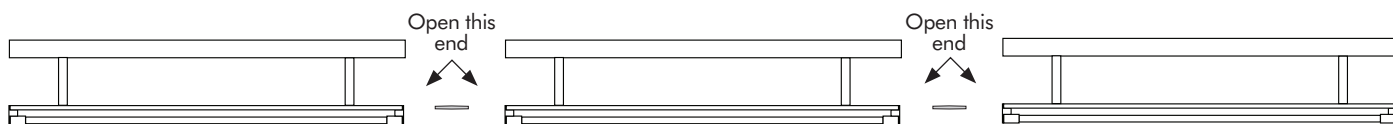

### RIGHT

SLTR open on right end

	LENGTH
SLTR98LO/HO	8 ft.
SLTR96LO/HO	6 ft.
SLTR94LO/HO	4 ft.
SLTR93LO/HO	3 ft.
SLTR92LO/HO	2 ft.

### MIDDLE

SLTM open on both ends

	LENGTH
SLTM98LO/HO	8 ft.
SLTM96LO/HO	6 ft.
SLTM94LO/HO	4 ft.
SLTM93LO/HO	3 ft.
SLTM92LO/HO	2 ft.


### LEFT

SLTL open on left end

	LENGTH
SLTL98LO/HO	8 ft.
SLTL96LO/HO	6 ft.
SLTL94LO/HO	4 ft.
SLTL93LO/HO	3 ft.
SLTL92LO/HO	2 ft.


## CONTINUOUS RUN CONNECTION

Follow instructions for rail or remote driver installation. Be certain to join right, left and middle fixtures accordingly. Slide connector to ensure proper alignment of adjacent fixtures. **Does not connect stand-alone fixtures.**

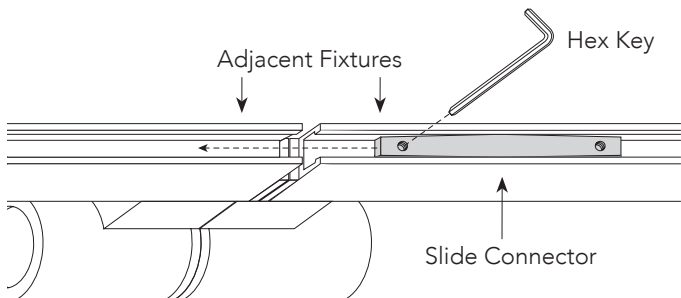

## SRB OPTION

Make lamp wire connections in a horizontally mounted 2x4 handy box. Driver must be accessible after installation. Maximum canopy to driver distance: 100 ft. (with 10 AWG wire).

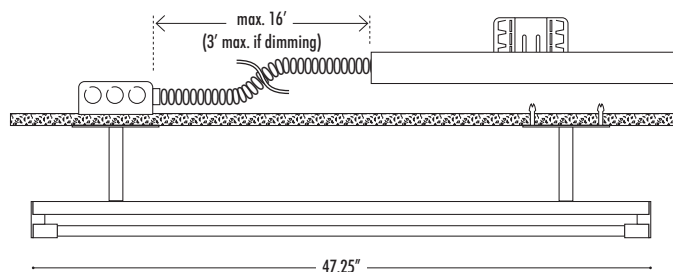

**NOTE:** Multiple drivers must be mounted no less than 4 in. apart side-by-side, and 1 in. apart end-to-end, to avoid overheating.

**SRB9S** – 2x4 in. rectangular cover plates that mount directly to standard handy boxes.

**SRB9R** – 4 in. round cover plates that mount to standard mud rings.

