UNO chandeliers

direct circular LED pendants with acrylic lens

CONSTRUCTION

- Extruded aluminum outer housing
- Direct frosted acrylic lenses.
- Suspended with field-adjustable aircraft cable, with push-button glider. 8 ft. 18 AWG power cord. Push button grippers supplied, standard. Specify **XP** for additional length. (25 ft. maximum.)
- Default finish/power cord pairings are silver/gray, white/white, black/black.
- For RAL colors, power cord color must be specified.
- For differing fixture/canopy colors, please consult factory.
- Drivers and DMX module remotely installed in surface mount canopy. For remote driver installation, see page 2.
- Drivers are universal voltage (120–277V).
- Nominal diameters, right. For actual diameters (in.), see chart p. 2.
- ETL listed per UL and CSA standards.



Cross Section: 2–6 ft.



Cross Section: 8 ft.

TYPE:	PROJECT:
ORDER NUMBER:	

MODEL#	SIZE	FINISH			LEDS	DIMMING	OPTION
UCG Gyroscope **UCN** Nexus **UCC** Cascade	2 ft. 3 ft. 4 ft. 5 ft. 6 ft. 8 ft.	**S**–Silver **W**–White **K**–Black **CC**– RAL Color*	**BW**–Barn Wood **CB**–Carbon Fiber **ES**–Espresso **HK**–Honey Oak **M**–Maple	**SD**–Silver Driftwood **DC**–Dark Cherry **KL**–Khaki Leather (More see p. 3)	**W30** **W35** **W40** **RGBW**–color + 3500° K white	**D**–Standard **BDIM-W11** **DMX** **DA**–DALI	**SS** **EM**
Example:							
UCG	**4/6/8**	**CB**			**W35**	**D**	**SS**

BDMXCON-W–white faceplate (enter quantity):		**XP**– Extra power cord (in inches, 25 ft. max.):	
BDMXCON-B– black faceplate (enter quantity):		Specify **canopy** finish (silver, white, black):	
EB– Earthquake Bracing Kit (enter quantity):		Specify power cord color (gray, white, black):	
XL– custom lumen reduction (specify lumens):		*Specify RAL color number:	

* 8 ft. utilizes Dos extrusion; shipped in two sections, with joiners, for assembly in the field.

UCG–Uno Gyroscope,
Central Remote mount
Choose up to three: 2/3/4/5/6/8 ft.

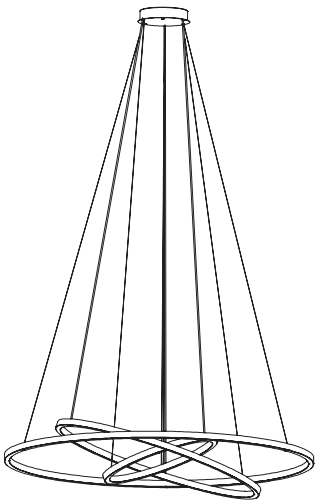

UCN–Uno Nexus,
Central Remote mount
Choose up to three: 2/3/4/5/6/8 ft.

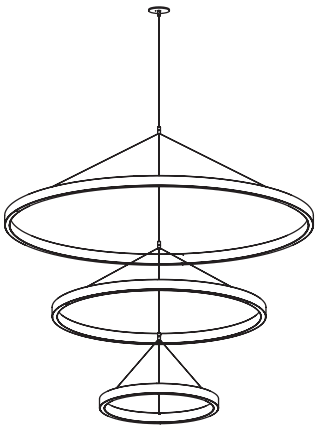

UCC–Uno Cascade,
Separate Remote mount
Choose up to three: 2/3/4/5/6/8 ft.



Note: Drawings indicate mount style only. Stacks and gyroscopes are configured in the field by adjusting aircraft and power cable lengths.

JUNE 2026

UNO chandeliers

direct circular LED pendants with acrylic lens

WHITE LEDS
Nichia Corp. NFSL757 tight bin chips on aluminum boards. 90 CRI. Specify color: W30–3000° Kelvin, W35–3500° Kelvin, or W40–4000° Kelvin.

CUSTOM LUMEN OUTPUT REDUCTION
Factory set custom reduced-lumen output driver configuration. Order **XL**. Specify lumens. Static white only.

COLOR LEDS
RGBW with 3500° K white. Includes RGBW interface. Optional DMX controller also available. (See below.)

DIMMING
- **D**–standard supplied driver. 0–10V, programmable, 1% dimming, 120/277V, 50/60 Hz.
- **BDIM-W11**–Lutron EcoSystem LED14 Series, 1% dimming, fade-to-off. Remote (**SR**, **CR**, **NCR**) install only.
- **DA**–DALI 1% dimming, fade-to-off. 120–277V, 50/60 Hz.
- **DMX**–for both white and RGBW LEDs, 0.1% dimming fade-to-off. 120–277V, 50/60Hz.

DIAMETER / WATTS / LUMENS / DRIVERS REQUIRED / WEIGHT

DIAMETER Nominal (Actual)	WATTS		DELIVERED LUMENS		DRIVERS REQUIRED		WEIGHT (lb.)
	White	RGBW	White	RGBW	White	RGBW	
2 ft. (25.10 in.)	26	Consult Factory	2,166	Consult Factory	1	Consult Factory	7
3 ft. (35.10 in.)	39		3,250		1		14
4 ft. (45.10 in.)	52		4,333		2		16
5 ft. (65.10 in.)	65		5,416		2		18
6 ft. (80.10 in.)	78		6,500		2		20
8 ft. (95.10 in.)	104		8,666		2		30

REMOTE DRIVERS
Drivers must be reomote.For suspended and hard lid ceilings with access panels. Canopy mounts to mud ring attached to J-box. Must be accessible after installation.

NOTE: Multiple drivers must be mounted no less than four inches apart side-by-side, and one inch apart end-to-end, to prevent overheating.

Standard pendant length: 8 ft. Specify **XP** for extra pendant. Maximum canopy to fixture distance: 25 ft. Maximum canopy to driver distance: 100 ft. (with 10 AWG wire).

Remote Driver Canopy
3.80 x 0.45 in.

UDCN, **UDCC** – separate mount driver installation.

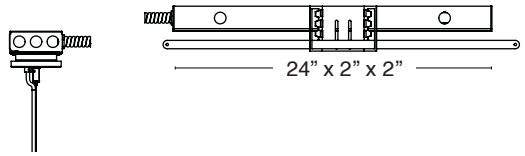

UDCG – central mount remote driver installation.

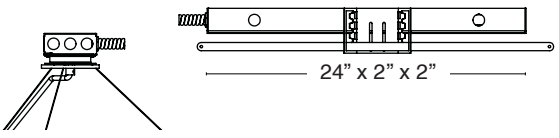

AIRCRAFT CABLE
NOTE: Not recommended for outdoor use, where fixture will be exposed to water, or subject to wind oscillation. Avoid use near HVAC vents and in environments with corrosive chemical vapors, such as swimming pools.

EM – Emergency. T-bar install shown, below. Battery pack provides 10W for 90 minutes. Remote install only. Red driver light and test switch mounted in handy box installed at ceiling.

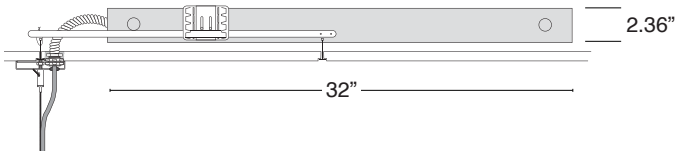

JOINER
8 ft. rings only. Joins two sections in the field.

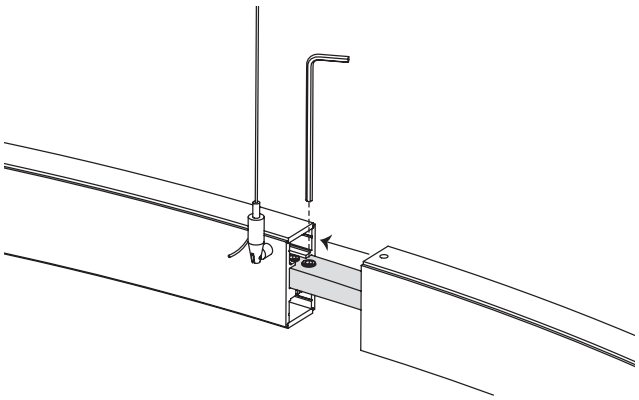

UNO chandeliers

direct circular LED pendants with acrylic lens

PAINT FINISHES



S–Silver



W-white

K-Black



CC-XXXX RAL Color

TEXTURED FINISHES

BW–Barnwood

CB–Carbon Fiber

ES–Espresso

HK–Honey Oak

M–Maple

SD–Silver Driftwood

PREMIUM TEXTURED FINISHES

DC–Dark Cherry

KL–Khaki Leather

METALLIC FINISHES



BR–Bronze

GF–Gold Leaf

CO–Copper

GT–Gold Textured

SA–Stainless Steel

TEXTURED FINISHES – CANOPY AND POWER CORD COLORS
Specify Silver, White, Black or RAL color for canopy. Also specify Gray, White or Black power cord.

ACRYLIC DIFFUSER CLEANING
WARNING: Do not clean with ammonia based cleaners (e.g. Windex®). Use only water or cleaners specifically formulated for cleaning plastics.

JUNE 2026