UNO vertical pendant

vertical mount circular LED with white frosted acrylic lens

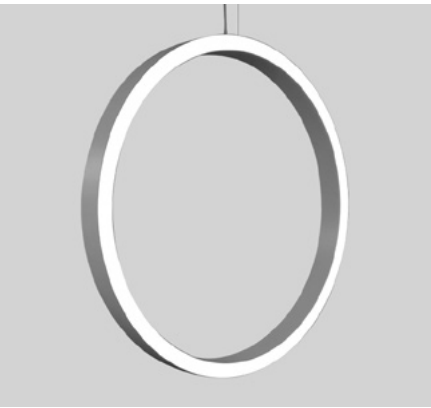

CONSTRUCTION

- Extruded aluminum outer housing
- Direct white frosted acrylic lens.
- 8 ft. gray or white 18 AWG adjustable power cord and AC cables. Push button grippers supplied, standard. Specify **XP** for additional length (25 ft. max.).
- Drivers and DMX module installed in surface mount canopy. For remote driver installation, see below.
- Nominal diameters, right. For actual diameters (in.), see p. 2.
- cUL listed for dry locations only.

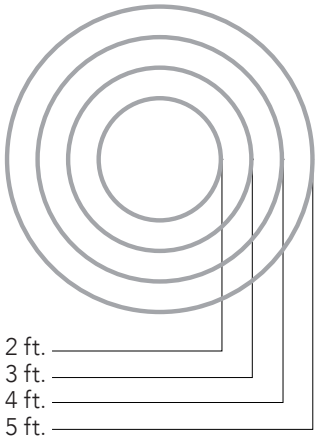

TYPE:	PROJECT:
ORDER NUMBER:	

MODEL#	FINISH			LEDS	MOUNT STYLE	DIMMING	OPTION
UVC2–2 ft. **UVC3**–3 ft. **UVC4**–4 ft. **UVC5**–5 ft.	**S**–Silver **W**–White **K**–Black	**BW**–Barn Wood **CB**–Carbon Fiber **ES**–Espresso **HO**–Honey Oak **M**–Maple **SD**–Silver Driftwood **SL**–Saddle Leather	**DC**–Dark Cherry **TL**–Tan Leather **KL**–Khaki Leather	**W30** **W35** **W40** **R**ed **B**lue **SQ**–RGB	**S**–Standard **SR**–Standard Remote	**D**–Standard **BDIM-W11**	**EM**–Emergency
Example:							
UVC5	**BW**			**W35**	**SR**	**D**	

BTRAXW–Traxon Light Drive (enter quantity)		**XP**– Extra power cord (in inches, 25 ft. max.)	
XL– custom lumen reduction (specify lumens)			

VERTICAL PENDANT

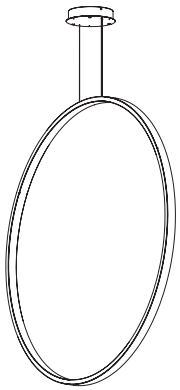

S – Standard

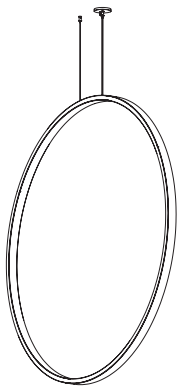

SR – Standard Remote



Cross Section

NOV 2020

UNO vertical pendant

vertical mount circular LED with white frosted acrylic lens

WHITE LEDS
Nichia Corp. NFSL757 tight bin chips on aluminum boards. 90 CRI. Specify color: W30–3000° Kelvin, W35–3500° Kelvin, or W40–4000° Kelvin.

COLOR LEDS
Flexible 5050 tapelights. Specify **R**–Red, **B**-–Blue, or **SQ**–RGB Sequencer. **SQ** includes **BDMXMOD**–DMX 512 RGB interface; or order **BTRAXW**–Traxon Light Drive DMX wall box separately.**

12V constant voltage driver for single color, 24V for RGB sequencer.

DIAMETER / WATTS / LUMENS

DIAMETER: NOMINAL (ACTUAL)	WATTS	DELIVERED LUMENS
2 ft. (25.10 in.)	26	2,166
3 ft. (35.10 in.)	39	3,250
4 ft. (45.10 in.)	52	4,333
5 ft. (65.10 in.)	65	5,416

TRAXON/OSRAM LIGHT DRIVE**
BTRAXW–white faceplate
- Standalone, wall-mounted (12V power supply included) DMX controller for RGBW LED that provides direct access to fixtures.
- Tune color and brightness with the Light-Drive wheel.
- Fully dimmable white mode button.
- See http://www.osram.com/ecue for details.

AIRCRAFT CABLE
NOTE: Not recommended for outdoor use, where fixture will be exposed to water, or subject to wind oscillation. Avoid use near HVAC vents and in environments with corrosive chemical vapors, such as swimming pools.

ACRYLIC DIFFUSER CLEANING
WARNING: Do not clean with ammonia based cleaners (e.g. Windex®). Use only water or cleaners specifically formulated for cleaning plastics.

DIMMING
- **D**–standard supplied driver. 0–10V, programmable, 1% dimming, 120/277V, 50/60 Hz.
- **BDIM-W11**–Lutron EcoSystem LED14 Series, 1% dimming, fade-to-off.

CUSTOM LUMEN OUTPUT REDUCTION
Factory set custom reduced-lumen output driver configuration. Order **XL**. Specify lumens.

REMOTE DRIVER
Driver must be accessible after installation. For suspended and hard lid ceilings with access panels. Canopy mounts to mud ring attached to J-box.

Standard pendant length: 8 ft. Specify **XP** for extra pendant. Maximum canopy to fixture distance: 25 ft. Maximum canopy to driver distance: 100 ft. (with 10 AWG wire).

NOTE: Multiple drivers must be mounted no less than 4 inches apart side-by-side, and 1 inch apart end-to-end, to avoid overheating.

Remote Driver Canopy
3.80 x 0.45 in.

SR – Surface mount driver installation.



EM – Emergency. T-bar install shown, below.Battery pack provides 10W for 90 minutes. Remote install only. Red driver light and test switch mounted in handy box installed at celing.

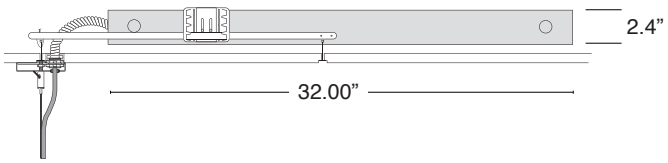

NOV 2020

UNO vertical pendant

vertical mount circular LED with white frosted acrylic lens

PAINT FINISHES

SWATCH	FINISH NO.
	S–Silver
	W-white
	K-Black

TEXTURED FINISHES

SWATCH	FINISH NO.
	BW–Barnwood
	CB–Carbon Fiber
	ES–Espresso
	HO–Honey Oak
	M–Maple
	SD–Silver Driftwood
	SL–Saddle Leather

PREMIUM TEXTURED FINISHES

SWATCH	FINISH NO.
	DC–Dark Cherry
	**TL**–Tan Leather
	KL–Khaki Leather

NOV 2020